







PILOT


Precision Products



- Keyway Broaches
- Push Broaches
- Pull Broaches




- Punch Broaches
- Hex/Square Broaches
- Tool Holders



- Center/Spot Drills
- Countersinks/
Multi-Function Tools
- Carbide Reamers



- Cobalt Micro-Drills
- Quality Carbide Micro-Drills
- High-Performance Carbide
Micro-Drills




- Indexable Broaches
- Tooling Inserts
- Motorized Slotters



TOOLING CONCIERGE

For Your Machining Operations

PilotPrecision.com

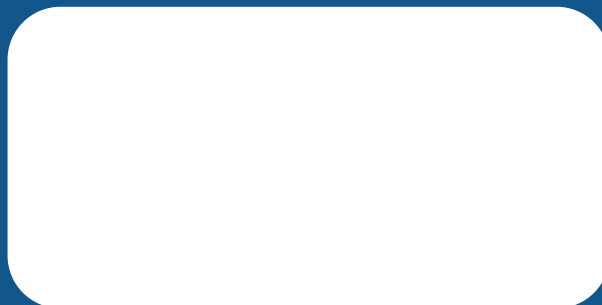

PILOT

Precision Products

Best-in-class brands, outstanding customer service and fast, reliable delivery

Pilot Precision Products is the World's largest supplier of industrial broaches and small, round cutting tools from duMONT MinuteMan® Industrial Broaches, Hassay Savage, duMONT CNC Indexable Broaching System, Magafor® and GMauvaisUSA™.

Pilot Precision Products balances time-honored traditions with innovative manufacturing techniques in all its offerings. As a result, customers can trust that the exceptional customer service from each company will remain the same.



World's largest supplier of keyway broaches

The duMONT Company has been designing and manufacturing precision broaches since 1945. Minute Man® Broaches are recognized all over the world for quality, durability and engineering detail. All are manufactured of the finest quality high-speed steel.

duMONT CNC Indexable Broaching System

The duMONT CNC Indexable Broaching System offers a wide range of products that provide the opportunity to manufacture parts more efficiently and accurately through single machine processing. This includes CNC Lathes, Milling Machines, Motorized Slotter and many CNC Broaching Systems. To complement all tools we offer many accessories to make your project run effortless.



World's leader and largest supplier in center drills, spot drills, micro to standard size reamers, countersinks, multi-function tools and micro end mills

Magafor can resolve any centering, chamfering, micro-milling or reaming issues you may be experiencing with top-quality products available in HSS-Cobalt or Carbide. Their Multi-V can reduce machining times and tool set-ups; one tool, one holder, ten applications. Pilot is the exclusive American distributor of Magafor products.



World's leader in rotary and index broaching

Hassay Savage products have five decades of engineering expertise behind them. If you're looking for critically accurate cuts, look no further. Choose from push, pull and rotary broaches with TiN and TiAlN coating. Big jobs come in small parts. Let us be your partner in unique cutting applications.



Highly specialized precision micro drills

GMauvaisUSA™ is known worldwide for superior precision, quality, consistency and performance. Notably, micro drills from the brand afford extraordinary concentricity, circularity and straightness within .00008". As the exclusive American distributor of GMauvais products, Pilot can bring GMauvaisUSA™ precision to you and your projects.

In addition to our robust off-the-shelf product offerings, customers often call on us for custom tooling. When such a request comes in, we never shy away from that challenge. In fact, we enjoy working to create a unique and highly productive solution.



duMONT

Minute Man[®]

Industrial Broaches



Hassay Savage

Rotary Broaches & Tool Holders

PILLOT

Table of Contents

- Introduction**..... 5
- Keyway Broach Sets**..... 6-8
- Metric Keyway Broach Sets**..... 9
- Imperial Keyway Sizes**..... 10-12
- Metric Keyway Sizes**..... 13-15
- Additional Sizes - Imperial & Metric - Keyway**..... 16
- One-Pass Keyway Broaches**..... 17
- Production Push-type Keyway Broaches**..... 18
- Square Push Broaches**..... 19
- Full Square Push Broaches**..... 20
- Round Push Broaches**..... 20
- Hexagon Push Broaches**..... 21
- Pull-Type Keyway Broaches**..... 22-23
- Keyseating Broaches**..... 24
- Arbor Presses and PressLube Broaching Oil**..... 25
- Custom Broaches (Spline, Keyway, Firearms)**..... 26
- Custom Broaches and Re-Sharpening (Surface, Internal Hole)**..... 27
- Engineering**..... 28-30
- To the Distributor**..... 31



A Reputation for Excellence

The duMONT and Hassay Savage Companies have been designing and manufacturing Precision Broaches for decades, and these Broaches are recognized all over the world for their quality, durability and engineering detail.

duMONT Minute Man® and Hassay Savage are proud to be the largest suppliers of Push-type Broaches in America, offering parts to a wide variety of businesses through a vast national and international distribution network. Our record of design ingenuity, fast delivery and courteous follow-up is unsurpassed.



Materials

All duMONT Minute Man® and Hassay Savage Broaches are manufactured of the finest quality high speed steel. We are equipped to fabricate from a variety of grades to meet your specifications. Contact your industrial distributor or the duMONT Engineering Department for details.

Call Your Industrial Distributor

Your industrial distributor is your best source for duMONT Minute Man® and Hassay Savage Broaches. If your regular distributor does not carry our products, call us and we will be happy to give you the name of the nearest distributor. For special technical assistance, call our Engineering Department at 413-350-5200.

Fast Delivery

An order for stock items placed by your industrial distributor with us by 3:00 PM EST will almost always be shipped on the same working day.

Material Safety Data Sheet

Available upon request or at PilotPrecision.com.

General Ordering Information

When ordering stock Pilot Precision Products Tools from your distributor, please specify EDP No., size and description to ensure proper fulfillment.

Transportation

All shipments are made via UPS where weight limitations allow. Express shipments, both surface and air, are available at your request. Shipments are F.O.B. South Deerfield, MA, unless otherwise stated.

Prices

Please contact us for current pricing or refer to the current price list for prices on all stock items. Prices are subject to change without notice.

TiN or TiAlN Coating

All standard items are available with coatings from stock or short delivery. Please contact Pilot Precision Products for details.

Warning: *Cutting tools may shatter. Eye protection should be worn wherever and whenever cutting tools are being used.*

MADE in the USA



Keyway Broach Sets

1/16 thru 3/8 inch sizes



Applications: **Short Run Production | General Maintenance**

All of our Broach Sets are furnished in traditional boxes, either varnished wood or plastic, depending upon the set selected, and come complete with Precision Broaches, slotted Bushings and necessary Shims.

No. 00 Precision Set / No. 1

3 Broaches and 5 Bushings = 15 Keyway combinations.
Collared bushings only. **Wt. 1 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|------------------------|-----------------|---|------------------------|---------------|
| | | | duMONT | Hassay Savage |
| 1/16, 3/32, 1/8 | A / I | 1/4, 5/16, 3/8, 7/16, 1/2 | 11101 Std 11301 TiN | *15315 |

Standard Set No. 30

3 Broaches and 9 Bushings = 15 Keyway combinations.
Collared bushings only. **Wt. 8 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. duMONT |
|------------------------|-----------------|---|-------------------|
| 1/8 | B / II | 1/2, 5/8, 3/4 | 11112 Std |
| 3/16, 1/4 | C / III | 7/8, 1, 1-1/8, 1-1/4, 1-3/8, 1-1/2 | |

Standard Set No. 10

4 Broaches and 9 Bushings = 18 Keyway combinations.
Collared bushings only. **Wt. 10 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. duMONT |
|------------------------|-----------------|---|-------------------|
| 1/8, 3/16 | B / II | 1/2, 5/8, 3/4, 7/8 | 11104 Std |
| 1/4, 3/8 | C / III | 1, 1-1/8, 1-1/4, 1-3/8, 1-1/2 | 11304 TiN |

Standard Set No. C-10

4 Broaches and 18 Bushings = 36 Keyway combinations.
Collared bushings only. **Wt. 13 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. Hassay Savage |
|------------------------|-----------------|--|--------------------------|
| 1/8, 3/16 | B / II | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 | *15336 |
| 1/4, 3/8 | C / III | 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16 | |

Standard Set No. 10A

4 Broaches and 9 Bushings = 18 Keyway combinations.
Collared bushings only. **Wt. 10 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. duMONT |
|------------------------|-----------------|---|-------------------|
| 1/8, 3/16 | B / II | 9/16, 11/16, 13/16 | 11108 Std |
| 1/4, 3/8 | C / III | 15/16, 1-1/16, 1-3/16 1-5/16, 1-7/16, 1-9/16 | |

Standard Set No. C-10A

3 Broaches and 18 Bushings = 36 Keyway combinations.
Collared bushings only. **Wt. 13 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. Hassay Savage |
|------------------------|-----------------|--|--------------------------|
| 1/8 | B / II | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 | *15330 |
| 3/16, 1/4 | C / III | 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16 | |



*Kit comes in a Dura Case

All standard items are available with TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.




Keyway Broach Sets

1/8 thru 3/8 inch sizes



Applications: **Short Run Production | General Maintenance**

All of our Broach Sets are furnished in traditional boxes, either varnished wood or plastic, depending upon the set selected, and come complete with Precision Broaches, slotted Bushings and necessary Shims.



| No. 10-10A Combination Set | | | |
|---|--------------|--|----------------|
| 4 Broaches and 18 Bushings = 36 Keyway combinations. Collared bushings only. Wt. 16 lbs | | | |
| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. duMONT |
| 1/8, 3/16 | B / II | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 | 11120 Std |
| 1/4, 3/8 | C / III | 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16 | |

| No. 20 Combination Set | | | |
|---|--------------|--|------------------------|
| 5 Broaches and 18 Bushings = 47 Keyway combinations. Collared bushings only. Wt. 16 lbs | | | |
| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. duMONT |
| 1/8, 3/16 | B / II | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 | 11121 Std 11321 TiN |
| 1/4, 5/16, 3/8 | C / III | 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16 | |

| Standard Set C-1 | | | |
|---|--------------|--------------------------------------|-----------------------|
| 4 Broaches and 9 Bushings = 18 Keyway combinations. Collared bushings only. Wt. 8 lbs | | | |
| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. Hassay Savage |
| 1/8, 3/16 | B / II | 1/2, 5/8, 3/4, 7/8 | *15318 |
| 1/4, 3/8 | C / III | 1, 1-1/8, 1-1/4, 1-3/8, 1-1/2 | |

duMONT Minute Man® / Hassay Savage


Keyway Broach Sets

1/8 thru 3/4 inch sizes



Applications: **Short Run Production | General Maintenance**

All of our Broach Sets are furnished in traditional boxes, either varnished wood or plastic, depending upon the set selected, and come complete with Precision Broaches, slotted Bushings and necessary Shims.



Standard Set No. 40A / 3-D

4 Broaches and 8 Bushings = 32 Keyway combinations.
Plain bushings only. **Wt. 50 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|----------------------|--------------|--|-----------|---------------|
| | | | duMONT | Hassay Savage |
| 5/16, 3/8, 7/16, 1/2 | D / IV | 1-1/2, 1-5/8, 1-3/4, 1-7/8, 2, 2-1/8, 2-1/4, 2-1/2 | 11127 Std | 15024 |

Standard Set No. 40 / 3-DA

4 Broaches and 8 Bushings = 32 Keyway combinations.
Plain bushings only. **Wt. 50 lbs**

| Keyway Size (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|----------------------|--------------|--|-----------|---------------|
| | | | duMONT | Hassay Savage |
| 5/16, 3/8, 7/16, 1/2 | D / IV | 1-7/16, 1-9/16, 1-11/16, 1-13/16, 1-15/16, 2-3/16, 2-7/16, 2-15/16 | 11129 Std | 15124 |

Heavy Duty Set No. 40 1/2 A / 4-E

2 Broaches and 6 Bushings = 12 Keyway combinations.
Plain bushings only. **Wt. 74 lbs**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|---------------------|--------------|--------------------------------------|-----------|---------------|
| | | | duMONT | Hassay Savage |
| 5/8, 3/4 | E / V | 2-3/8, 2-1/2, 2-5/8, 2-3/4, 2-7/8, 3 | 11131 Std | |

Heavy Duty Set No. 50 / No. 5

3 Broaches and 17 Bushings = 29 Keyway combinations.
Plain bushings only. **Wt. 175 lbs 3-4 Boxes**

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|---------------------|--------------|---|-----------|---------------|
| | | | duMONT | Hassay Savage |
| 1/2 | D / IV | 2, 2-1/16, 2-1/8, 2-3/16, 2-1/4, 2-5/16, 2-3/8, 2-7/16 | 11135 Std | |
| 5/8, 3/4 | E / V | 2-5/16, 2-3/8, 2-7/16, 2-1/2, 2-9/16, 2-5/8, 2-11/16, 2-3/4, 2-13/16, 2-7/8, 2-15/16, 3 | | |

No. 100 Heavy Duty Combination Set

9 Broaches and 44 Bushings = 102 Keyway combinations.
Collared B / II and C / III bushings, plain D / IV and E / V bushing.
Wt. 250 lbs 5 Boxes

| Keyway Sizes (inch) | Broach Style | Bushing Diameters (bore sizes, inch) | EDP No. | |
|---------------------|--------------|--|-----------|---------------|
| | | | duMONT | Hassay Savage |
| 1/8, 3/16 | B / II | 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8 | 11136 Std | |
| 1/4, 5/16 | C / III | 15/16, 1, 1-1/16, 1-1/8, 1-3/16, 1-1/4, 1-5/16, 1-3/8, 1-7/16, 1-1/2, 1-9/16 | | |
| 3/8, 7/16, 1/2 | D / IV | 1-7/16, 1-1/2, 1-9/16, 1-5/8, 1-11/16, 1-3/4, 1-13/16, 1-7/8, 1-15/16, 2, 2-1/16, 2-1/8, 2-3/16, 2-1/4 | | |
| 5/8, 3/4 | E / V | 2-5/16, 2-3/8, 2-7/16, 2-1/2, 2-9/16, 2-5/8, 2-11/16, 2-3/4, 2-13/16, 2-7/8, 2-15/16, 3 | | |

*NOTE: Shipped via freight truck only.




Metric Keyway Broach Sets

2mm thru 18mm



Applications: **Short Run Production** | **General Maintenance**

All of our Broach Sets are furnished in traditional boxes, either varnished wood or plastic, depending upon the set selected, and come complete with Precision Broaches, slotted Bushings and necessary Shims.



| No. 40 Metric Set | | | |
|--|--------------|--|-----------------------|
| 6 Broaches and 18 Bushings = 36 Keyway Combinations Collared Bushings Only. Wt. 10 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. Hassay Savage |
| 2 3 | A / I | 8, 10 | *15440 |
| 4 5 | B / II | 12, 14, 16, 18 | |
| 6 8 | C / III | 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 34 | |

| No. 60 Metric Set | | | |
|--|--------------|------------------------------------|----------------|
| 2 Broaches and 3 Bushings = 6 Keyway combinations. Collared bushings only. Wt. 1 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. duMONT |
| 2 3 | A / I | 6, 8, 10 | 44497 Std |

| No. 70 Metric Set | | | |
|---|--------------|--------------------------------------|----------------|
| 4 Broaches and 13 Bushings = 26 Keyway combinations. Collared bushings only. Wt. 15 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. duMONT |
| 4 5 | B / II | 12, 14 | 44498 Std |
| | | 15, 16 | |
| 6 8 | C / III | 18, 19, 20, 22 24, 25, 26, 28, 30 | |

| No. 80 Metric Set | | | |
|--|--------------|------------------------------------|----------------|
| 3 Broaches and 12 Bushings = 36 Keyway combinations. Plain bushings only. Wt. 40 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. duMONT |
| 10 12 14 | D / IV | 32, 34, 35, 36 | 44499 Std |
| | | 38, 40, 42, 44 | |
| | | 45, 46, 48, 50 | |

| No. 90 Metric Set | | | |
|---|--------------|------------------------------------|----------------|
| 2 Broaches and 8 Bushings = 16 Keyway combinations. Plain bushings only. Wt. 61 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. duMONT |
| 16 18 | E / V | 52, 54, 55, 56 | 44500 Std |
| | | 58, 60, 62, 65 | |

| Precision Set 10 | | | |
|---|--------------|------------------------------------|-----------------------|
| 2 Broaches and 5 Bushings = 10 Keyway combinations. Collared bushings only. Wt. 1 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. Hassay Savage |
| 2 3 | A / I | 6, 7, 8, 9, 10 | *15410 |

| Metric Set 12 | | | |
|---|--------------|------------------------------------|-----------------------|
| 2 Broaches and 6 Bushings = 12 Keyway combinations. Plain bushings only. Wt. 70 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. Hassay Savage |
| 16 18 | E / V | 54, 56, 58, 60, 62, 64 | 15212 |

| Metric Set 18 | | | |
|--|-------------------|--------------------------------------|-----------------------|
| 4 Broaches and 9 Bushings = 18 Keyway combinations. Collared bushings only. Wt. 7 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. Hassay Savage |
| 4 5 6 8 | B / II C / III | 12, 14, 16, 18 20, 22, 24, 26, 28 | *15418 |

| Metric Set 24 | | | |
|---|--------------|------------------------------------|-----------------------|
| 3 Broaches and 8 Bushings = 24 Keyway combinations. Plain bushings only. Wt. 36 lbs | | | |
| Keyway Sizes (mm) | Broach Style | Bushing Diameters (bore sizes, mm) | EDP No. Hassay Savage |
| 10 12 14 | D / IV | 34, 36, 38, 40, 42, 44, 46, 48 | 15224 |

*Kit comes in a Dura Case


All standard items are available with TiAIN coating from stock or short delivery. Please contact Pilot Precision Products for details.

duMONT Minute Man® / Hassay Savage

A/I - Imperial - Keyway

1/16 thru 1/8 inch sizes

Applications: **Short Run Production** | **General Maintenance**

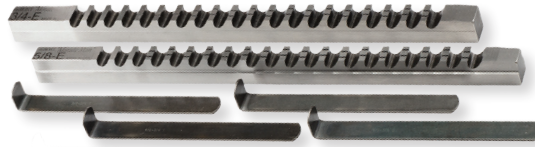

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|---------------|-------------------|----------------|---------------|-------|--|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 1/16-A | .0625 – .0635 | 1/8 x 5 | 0 | 13/64 | 1-1/8 | 390 | 22201 | 22301 | 22801 | 10104 |
| 3/32-A | .0938 – .0948 | 1/8 x 5 | 0 | 13/64 | 1-1/8 | 780 | 22202 | 22302 | 22802 | 10106 |
| 1/8-A | .1252 – .1262 | 1/8 x 5 | 1 | 13/64 | 1-1/8 | 650 | 22203 | 22303 | 22803 | 10108 |

A / I Bushings for A / I Broaches (collared only)

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 1/4 | 1-1/8 | 33301 | 20116 |
| 5/16 | | 33302 | 20120 |
| 3/8 | | 33303 | 20124 |
| 7/16 | | 33304 | 20128 |
| 1/2 | | 33305 | 20132 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 1/8-A | 1 | .031 | 22250 |

B/II - Imperial - Keyway

3/32 thru 3/16 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|---------------|-------------------|----------------|---------------|---------|--|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 3/32-B | .0938 – .0948 | 3/16 x 6-3/4 | 0 | 19/64 | 1-11/16 | 930 | 22204 | 22304 | 22804 | 10206 |
| 1/8-B | .1252 – .1262 | 3/16 x 6-3/4 | 1 | 19/64 | 1-11/16 | 720 | 22205 | 22305 | 22805 | 10208 |
| 5/32-B | .1564 – .1574 | 3/16 x 6-3/4 | 1 | 19/64 | 1-11/16 | 1,320 | 22206 | 22306 | 22806 | 10210 |
| 3/16-B | .1877 – .1887 | 3/16 x 6-3/4 | 1 | 19/64 | 1-11/16 | 1,860 | 22207 | 22307 | 22807 | 10212 |

B / II Bushings for B / II Broaches (collared only)

| Diameter (inch) | Length | EDP No. | |
|-----------------|---------|---------|---------------|
| | | duMONT | Hassay Savage |
| 1/2 | 1-11/16 | 33313 | 20232 |
| 9/16 | | 33314 | 20236 |
| 5/8 | | 33315 | 20240 |
| 11/16 | | 33316 | 20244 |
| 3/4 | | 33317 | 20248 |
| 13/16 | | 33318 | 20252 |
| 7/8 | | 33319 | 20256 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 1/8-B | 1 | .031 | 22252 |
| 5/32-B | 1 | .042 | 22253 |
| 3/16-B | 1 | .050 | 22254 |

SPECIAL ORDERS: We are fully equipped to manufacture Special Bushings not listed. Please contact Pilot Precision Products for details.

duMONT Minute Man® / Hassay Savage

C/III - Imperial - Keyway

3/16 thru 3/8 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|---------------|-------------------|----------------|---------------|-------|--|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 3/16-C | .1877 - .1887 | 3/8 x 11-3/4 | 1 | 25/64 | 2-1/2 | 1,540 | 22208 | 22308 | 22808 | 10312 |
| 1/4-C | .2502 - .2512 | 3/8 x 11-3/4 | 1 | 25/64 | 2-1/2 | 2,520 | 22209 | 22309 | 22809 | 10316 |
| 5/16-C | .3127 - .3137 | 3/8 x 11-3/4 | 2 | 25/64 | 2-1/2 | 3,960 | 22210 | 22310 | 22810 | 10320 |
| 3/8-C | .3755 - .3765 | 3/8 x 11-3/4 | 2 | 25/64 | 2-1/2 | 4,340 | 22211 | 22311 | 22811 | 10324 |

C / III Bushings for C / III Broaches *(collared only)*

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 3/4 | 2-1/2 | 33334 | 20348 |
| 13/16 | | 33335 | 20352 |
| 7/8 | | 33336 | 20356 |
| 15/16 | | 33337 | 20360 |
| 1 | | 33338 | 20364 |
| 1-1/16 | | 33339 | 20368 |
| 1-1/8 | | 33340 | 20372 |
| 1-3/16 | | 33341 | 20376 |
| 1-1/4 | | 33342 | 20380 |
| 1-5/16 | | 33343 | 20384 |
| 1-3/8 | | 33344 | 20388 |
| 1-7/16 | | 33345 | 20392 |
| 1-1/2 | | 33346 | 20396 |
| 1-9/16 | | 33347 | 20400 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 3/16-C | 1 | .050 | 22255 |
| 1/4-C | 1 | .0625 | 22256 |
| 5/16-C | 2 | .055 | 22257 |
| 3/8-C | 2 | .0625 | 22258 |

D/IV - Imperial - Keyway

5/16 thru 9/16 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|---------------|-------------------|----------------|---------------|------|--|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 5/16-D | .3127 - .3137 | 9/16 x 13-7/8 | 2 | 1 | 6 | 8,000 | 22212 | 22312 | 22812 | 10420 |
| 3/8-D | .3755 - .3765 | 9/16 x 13-7/8 | 2 | 1 | 6 | 7,000 | 22213 | 22313 | 22813 | 10424 |
| 7/16-D | .4380 - .4390 | 9/16 x 13-7/8 | 3 | 1 | 6 | 9,400 | 22214 | 22314 | 22814 | 10428 |
| 1/2-D | .5006 - .5016 | 9/16 x 13-7/8 | 3 | 1 | 6 | 9,800 | 22215 | 22315 | 22815 | 10432 |
| 9/16-D | .5631 - .5641 | 9/16 x 13-7/8 | 4 | 1 | 6 | 8,900 | 10142 | 10342 | 10842 | 10436 |

D / IV Bushings for D / IV Broaches *(plain only)*

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 1-7/16 | 4 | 33348 | 21492 |
| 1-1/2 | | 33349 | 21496 |
| 1-9/16 | | 33350 | 21500 |
| 1-5/8 | | 33351 | 21504 |
| 1-11/16 | | 33352 | 21508 |
| 1-3/4 | | 33353 | 21512 |

D / IV Bushings for D / IV Broaches *(plain only)*

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 1-13/16 | 5 | 33354 | 21516 |
| 1-7/8 | | 33355 | 21520 |
| 1-15/16 | | 33356 | 21524 |
| 2 | | 33357 | 21528 |
| 2-1/16 | | 33358 | 21532 |
| 2-1/8 | | 33359 | 21536 |
| 2-3/16 | | 33360 | 21540 |
| 2-1/4 | | 33361 | 21544 |
| 2-5/16 | | 33362 | 21548 |

D / IV Bushings for D / IV Broaches *(plain only)*

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 2-3/8 | 6 | 33363 | 21552 |
| 2-7/16 | | 33364 | 21556 |
| 2-1/2 | | 33365 | 21560 |
| 2-9/16 | | 33366 | 21564 |
| 2-5/8 | | 33367 | 21568 |
| 2-11/16 | | 33368 | 21572 |
| 2-3/4 | | 33369 | 21576 |
| 2-13/16 | | 33370 | 21580 |
| 2-7/8 | | 33371 | 21584 |
| 2-15/16 | | 33372 | 21588 |
| 3 | | 33373 | 21592 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 5/16-D | 2 | .056 | 22259 |
| 3/8-D | 2 | .0625 | 22260 |
| 7/16-D | 3 | .056 | 22261 |
| 1/2-D | 3 | .0625 | 22262 |
| 9/16-D | 4 | .056 | 22269 |

duMONT Minute Man® / Hassay Savage

E/V - Imperial - Keyway

5/8 thru 3/4 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|---------------|-------------------|----------------|---------------|------|---------------------------------------|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 5/8-E | .6260 – .6270 | 3/4 x 15-1/2 | 4 | 1 | 6 | 9,600 | 22216 | 22316 | 22816 | 10540 |
| 3/4-E | .7515 – .7525 | 3/4 x 15-1/2 | 5 | 1 | 6 | 11,900 | 22217 | 22317 | 22817 | 10548 |

E / V Bushings for E / V Broaches (plain only)

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 2-5/16 | 6 | 33374 | 21688 |
| 2-3/8 | | 33375 | 21692 |
| 2-7/16 | | 33376 | 21696 |
| 2-1/2 | | 33377 | 21700 |
| 2-9/16 | | 33378 | 21704 |
| 2-5/8 | | 33379 | 21708 |
| 2-11/16 | | 33380 | 21712 |
| 2-3/4 | | 33381 | 21716 |
| 2-13/16 | | 33382 | 21720 |
| 2-7/8 | | 33383 | 21724 |
| 2-15/16 | | 33384 | 21728 |

E / V Bushings for E / V Broaches (plain only)

| Diameter (inch) | Length | EDP No. | |
|-----------------|--------|---------|---------------|
| | | duMONT | Hassay Savage |
| 3 | 6 | 33385 | 21732 |
| 3-1/16 | | 33386 | - |
| 3-1/8 | | 33387 | - |
| 3-3/16 | | 33388 | - |
| 3-1/4 | | 33389 | - |
| 3-5/16 | | 33390 | - |
| 3-3/8 | | 33391 | - |
| 3-7/16 | | 33392 | - |
| 3-1/2 | | 33393 | - |
| 3-9/16 | | 33394 | - |
| 3-5/8 | | 33395 | - |
| 3-11/16 | | 33396 | - |
| 3-3/4 | | 33397 | - |
| 3-13/16 | | 33398 | - |
| 3-7/8 | | 33399 | - |
| 3-15/16 | | 33400 | - |
| 4 | | 33401 | - |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 5/8-E | 4 | .0625 | 22263 |
| 3/4-E | 5 | .0625 | 22264 |

F/VI - Imperial - Keyway

7/8 thru 1 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|-----------------|-------------------|----------------|---------------|------|---------------------------------------|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 7/8-F | .8765 – .8775 | 1 x 19-3/4 | 6 | 1 | 6 | 9,800 | 22218 | 22318 | 22818 | 10656 |
| 1-F | 1.0015 – 1.0025 | 1 x 19-3/4 | 7 | 1 | 6 | 11,100 | 22219 | 22319 | 22819 | 10664 |

F / VI Bushings for F / VI Broaches (plain only)

| Diameter (inch) | Length | EDP No. |
|-----------------|--------|---------|
| | | duMONT |
| 3-1/16 | 6 | 33500 |
| 3-1/8 | | 33501 |
| 3-3/16 | | 33502 |
| 3-1/4 | | 33503 |
| 3-5/16 | | 33504 |
| 3-3/8 | | 33505 |
| 3-7/16 | | 33506 |
| 3-1/2 | | 33507 |
| 3-9/16 | | 33508 |
| 3-5/8 | | 33509 |

F / VI Bushings for F / VI Broaches (plain only)

| Diameter (inch) | Length | EDP No. |
|-----------------|--------|---------|
| | | duMONT |
| 3-11/16 | 6 | 33510 |
| 3-3/4 | | 33511 |
| 3-13/16 | | 33512 |
| 3-7/8 | | 33513 |
| 3-15/16 | | 33514 |
| 4 | | 33515 |
| 4-1/16 | | 33516 |
| 4-1/8 | | 33517 |
| 4-3/16 | | 33518 |
| 4-1/4 | | 33519 |

F / VI Bushings for F / VI Broaches (plain only)

| Diameter (inch) | Length | EDP No. |
|-----------------|--------|---------|
| | | duMONT |
| 4-5/16 | 6 | 33520 |
| 4-3/8 | | 33521 |
| 4-7/16 | | 33522 |
| 4-1/2 | | 33523 |
| 4-9/16 | | 33524 |
| 4-5/8 | | 33525 |
| 4-11/16 | | 33526 |
| 4-3/4 | | 33527 |
| 4-13/16 | | 33528 |
| 4-7/8 | | 33529 |
| 4-15/16 | | 33530 |
| 5 | | 33531 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 7/8-F | 6 | .0625 | 22265 |
| 1-F | 7 | .0625 | 22266 |


duMONT Minute Man® / Hassay Savage

A/I - Metric - Keyway

2 thru 3 mm sizes



Applications: **Short Run Production** | **General Maintenance**

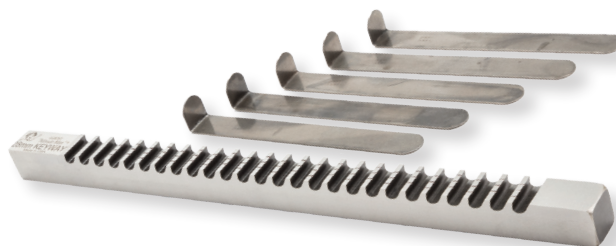

Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. | | | |
|------------------|-----------------------------|----------------------------|--------------------------|-------------|------------------------|-------|--|-------------|------------|--------------|---------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAlN | Hassay Savage |
| 2-A / I | 0.0782 – 0.0791 | 1/8 x 5 | 2 x 2 | 0 | 13/64 | 1-1/8 | 720 | 44401 | 44301 | 44801 | 11102 |
| 3-A / I | 0.1176 – 0.1185 | | 3 x 3 | 1 | | | | 44402 | 44302 | 44802 | 11103 |

A / I Bushings for A / I Broaches *(collared only)*

| Diameter (mm) | (Decimal Equiv.) | EDP No. | |
|---------------|------------------|---------|---------------|
| | | duMONT | Hassay Savage |
| 6 | .2362 | 44501 | 22106 |
| 7 | .2756 | - | 22107 |
| 8 | .3150 | 44431 | 22108 |
| 9 | .3543 | - | 22109 |
| 10 | .3937 | 44432 | 22110 |
| 12 | .4724 | 44502 | |
| 15 | .5905 | 44503 | |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|----------------|----------------|
| 3-A / I | 1 | 0.0310 | 44480 |

B1/II - Metric - Keyway

4 thru 5 mm sizes



Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. | | | |
|------------------|-----------------------------|----------------------------|--------------------------|-------------|------------------------|---------|--|-------------|------------|--------------|---------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAlN | Hassay Savage |
| 4-B1 / II | 0.1569 – 0.1579 | 1/4 x 6-3/4 | 4 x 4 | 1 | 19/64 | 1-11/16 | 1,140 | 44403 | 44303 | 44803 | 11204 |
| 5-B1 / II | 0.1963 – 0.1972 | | 5 x 5 | | | | | 44404 | 44304 | 44804 | 11205 |

B1 / II Bushings for B1 / II Broaches *(collared only)*

| Diameter (mm) | (Decimal Equiv.) | EDP No. | |
|---------------|------------------|---------|---------------|
| | | duMONT | Hassay Savage |
| 11 | .4331 | 44510 | 22211HS |
| 12 | .4724 | 44433 | 22212HS |
| 13 | .5118 | 44511 | 22213HS |
| 14 | .5512 | 44434 | 22214HS |
| 15 | .5905 | 44504 | 22215HS |
| 16 | .6299 | 44435 | 22216HS |
| 17 | .6693 | 44505 | 22217HS |
| 18 | .7087 | 44436 | 22218HS |
| 19 | .7480 | 44506 | 22219HS |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|----------------|----------------|
| 4-B1 / II | 1 | 0.0380 | 44481 |
| 5-B1 / II | | 0.0500 | 44482 |



duMONT Minute Man® / Hassay Savage

C/III - Metric - Keyway

5 thru 8 mm sizes



Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. | | | |
|------------------|-----------------------------|----------------------------|--------------------------|-------------|------------------------|-------|--|-------------|------------|--------------|---------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 5-C / III | 0.1963 - 0.1972 | 3/8 x 11-3/4 | 5 x 5 | 1 | 25/64 | 2-1/2 | 1,470 | 44405 | 44305 | 44805 | 11305 |
| 6-C / III | 0.2356 - 0.2366 | | 6 x 6 | 1 | | | 2,100 | 44406 | 44306 | 44806 | 11306 |
| 7-C / III | 0.2749 - 0.2763 | | 7 x 6 | 1 | | | 2,900 | 10232 | 10332 | 10832 | 11307 |
| 8-C / III | 0.3143 - 0.3155 | | 8 x 7 | 2 | | | 3,680 | 44407 | 44307 | 44807 | 11308HS |

C / III Bushings for C / III Broaches (collared only)

| Diameter (mm) | (Decimal Equiv.) | EDP No. | |
|---------------|------------------|---------|---------------|
| | | duMONT | Hassay Savage |
| 17 | .6693 | 44512 | 22317HS |
| 18 | .7087 | 44437 | 22318HS |
| 19 | .7480 | 44438 | 22319HS |
| 20 | .7874 | 44439 | 22320HS |
| 22 | .8661 | 44440 | 22322HS |
| 24 | .9449 | 44441 | 22324HS |
| 25 | .9842 | 44442 | 22325HS |
| 26 | 1.0236 | 44443 | 22326HS |
| 27 | 1.0630 | - | 22327HS |
| 28 | 1.1024 | 44444 | 22328HS |
| 30 | 1.1811 | 44445 | 22330HS |
| 32 | 1.2598 | 44446 | 22332HS |
| 34 | 1.3386 | 44447 | 22334HS |
| 35 | 1.3779 | 44507 | 22335HS |
| 36 | 1.4173 | 44448 | 22336HS |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|----------------|----------------|
| 5-C / III | 1 | 0.0470 | 44483 |
| 6-C / III | 1 | 0.0625 | 44484 |
| 7-C / III | 1 | 0.0625 | 44577 |
| 8-C / III | 2 | 0.0500 | 44485 |

D/IV - Metric - Keyway

10 thru 14 mm sizes



Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. | | | |
|------------------|-----------------------------|----------------------------|--------------------------|-------------|------------------------|------|--|-------------|------------|--------------|---------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 10-D / IV | 0.3930 - 0.3942 | 9/16 x 13-7/8 | 10 x 8 | 2 | 1 | 6 | 6,500 | 44408 | 44308 | 44808 | 11410 |
| 12-D / IV | 0.4716 - 0.4730 | | 12 x 8 | | | | 8,400 | 44409 | 44309 | 44809 | 11412 |
| 14-D / IV | 0.5503 - 0.5517 | | 14 x 9 | | | | 11,100 | 44410 | 44310 | 44810 | 11414 |

D / IV Bushings for D / IV Broaches (plain only)

| Diameter (mm) | (Decimal Equiv.) | EDP | |
|---------------|------------------|--------|---------------|
| | | duMONT | Hassay Savage |
| 32 | 1.2598 | 44449 | 22432 |
| 34 | 1.3386 | 44450 | 22434 |
| 35 | 1.3779 | 44451 | 22435 |
| 36 | 1.4173 | 44452 | 22436 |
| 38 | 1.4961 | 44453 | 22438 |
| 40 | 1.5748 | 44454 | 22440 |
| 42 | 1.6535 | 44455 | 22442 |
| 44 | 1.7323 | 44456 | 22444 |

D / IV Bushings for D / IV Broaches (plain only)

| Diameter (mm) | (Decimal Equiv.) | EDP | |
|---------------|------------------|--------|---------------|
| | | duMONT | Hassay Savage |
| 45 | 1.7716 | 44457 | 22445 |
| 46 | 1.8110 | 44458 | 22446 |
| 48 | 1.8898 | 44459 | 22448 |
| 50 | 1.9685 | 44460 | 22450 |
| 52 | 2.0472 | 44461 | 22452 |
| 54 | 2.1260 | 44462 | 22454 |
| 55 | 2.1653 | - | 22455 |
| 56 | 2.2047 | 44463 | 22456 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|----------------|----------------|
| 10-D / IV | 2 | 0.0560 | 44486 |
| 12-D / IV | | 0.0560 | 44487 |
| 14-D / IV | | 0.0625 | 44488 |

duMONT Minute Man® / Hassay Savage

E/V - Metric - Keyway

16 thru 18 mm sizes



Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required. for Max. L/C (lbs.)* | EDP No. | | | |
|------------------|--------------------------------|-------------------------------|--------------------------------|----------------|------------------------|------|--|-------------|------------|--------------|------------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 16-E / V | 0.6290 – 0.6304 | 3/4 x 15-1/2 | 16 x 10 | 3 | 1 | 6 | 9,400 | 44411 | 44311 | 44811 | 11516 |
| 18-E / V | 0.7078 – 0.7092 | | 18 x 11 | | | | | 44412 | 44312 | 44812 | 11518 |

E / V Bushings for
E / V Broaches *(plain only)*

| Diameter (mm) | (Decimal Equiv.) | EDP No. | |
|------------------|------------------|---------|------------------|
| | | duMONT | Hassay Savage |
| 52 | 2.0472 | 44464 | 22552 |
| 54 | 2.1260 | 44465 | 22554 |
| 55 | 2.1653 | 44466 | 22555 |
| 56 | 2.2047 | 44467 | 22556 |
| 58 | 2.2835 | 44468 | 22558 |
| 60 | 2.3622 | 44469 | 22560 |
| 62 | 2.4409 | 44470 | 22562 |
| 63 | 2.4803 | 44471 | - |
| 64 | 2.5197 | 44472 | 22564 |
| 65 | 2.5590 | 44473 | 22565 |
| 66 | 2.5984 | 44474 | 22566 |
| 68 | 2.6772 | 44475 | 22568 |
| 70 | 2.7559 | 44476 | 22570 |
| 72 | 2.8346 | 44477 | 22572 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|---------------------|---------|-------------------|-------------------|
| 16-E / V | 3 | 0.0560 | 44489 |
| 18-E / V | | 0.0560 | 44490 |

F/VI - Metric - Keyway

20 thru 25 mm sizes



Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required. for Max. L/C (lbs.)* | EDP No. | | | | |
|------------------|--------------------------------|-------------------------------|--------------------------------|----------------|------------------------|------|--|-------------|------------|--------------|------------------|-------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAIN | Hassay Savage | |
| 20-F / VI | 0.7864 – 0.7880 | 1 x 19-3/4 | 20 x 12 | 3 | 1 | 6 | 8,800 | 44413 | 44313 | 44813 | 11620 | |
| 22-F / VI | 0.8651 – 0.8667 | | 22 x 14 | 4 | | | | 9,400 | 44414 | 44314 | 44814 | 11622 |
| 24-F / VI | 0.9439 – 0.9455 | | 24 x 14 | 4 | | | | 10,600 | 44415 | 44315 | 44815 | 11624 |
| 25-F / VI | 0.9832 – 0.9848 | | 25 x 14 | 4 | | | | 12,300 | 44494 | 44394 | 44894 | 11625 |

F / VI Bushings for
F / VI Broaches *(plain only)*

| Diameter (mm) | (Decimal Equiv.) | EDP No. duMONT |
|------------------|------------------|-------------------|
| 70 | 2.7559 | 44539 |
| 75 | 2.9527 | 44540 |
| 80 | 3.1496 | 44541 |
| 85 | 3.3464 | 44542 |
| 90 | 3.5433 | 44543 |
| 95 | 3.7401 | 44544 |
| 100 | 3.9370 | 44545 |
| 105 | 4.1338 | 44546 |
| 110 | 4.3307 | 44547 |
| 115 | 4.5275 | 44548 |
| 120 | 4.7244 | 44549 |

Extra Shims

Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|---------------------|---------|-------------------|-------------------|
| 20-F | 3 | 0.0625 | 44491 |
| 22-F | 4 | 0.0560 | 44492 |
| 24-F | 5 | 0.0625 | 44493 |
| 25-F | 4 | 0.0560 | 44496 |



duMONT Minute Man® / Hassay Savage

Additional Sizes - Imperial - Keyway

1-1/8 thru 2 inch sizes

Stock Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (inch) | Tolerances | Broach Dimensions | Shims Required | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | | | |
|--------------------|-----------------|-------------------|----------------|---------------|------|--|------------|------------|--------------|---------------|
| | | | | Min. | Max. | | duMONT Std | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 1-1/8 | 1.1265 – 1.1275 | 1-1/8 x 20-1/4 | 8 | 1 | 6 | 14,750 | 10171 | - | - | 10666HS |
| 1-1/4 | 1.2520 – 1.2530 | 1-1/4 x 20-1/4 | 9 | 1-1/2 | 8 | 22,100 | 10172 | - | - | 10668HS |
| 1-3/8 | 1.3770 – 1.3780 | 1-3/8 x 20-1/4 | ** | 1-1/2 | 8 | 23,500 | 10173 | - | - | 10670HS |
| 1-1/2 | 1.5020 – 1.5030 | 1-1/2 x 20-1/4 | ** | 1-1/2 | 8 | 26,500 | 10174 | - | - | 10672HS |
| 1-3/4 | 1.7520 – 1.7530 | 1-3/4 x 20-1/4 | ** | 1-1/2 | 8 | 31,400 | 10175 | - | - | - |
| | 2.003 – 2.004 | 1-3/4 x 20-1/16 | ** | 1-1/2 | 8 | 35,900 | 10176 | - | - | - |

*Based on mild steel **Shims are not supplied with these broaches, sold as Progressive Shims only, see below

■ 1-1/8" to 2" broaches need special order bushings. Please provide bore diameter to quote.

Extra Shims

Extra Shims are provided in necessary Shim Sets only. For Broaches larger than 1-1/4" progressive Shims are available as special items. Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|----------------|---------|
| 1-1/8 | 8 | .0625 | 22267 |
| 1-1/4 | 9 | .0625 | 22268 |

Progressive Shims

| Broach Size (inch) | # / Set | Shim Thickness | EDP No. |
|--------------------|---------|------------------------------|---------|
| 1-3/8 | 4 | .062, .125, .250, .375 | 22270 |
| 1-1/2 | 4 | .062, .125, .250, .375 | 22271 |
| 1-3/4 | 4 | .062, .125, .250, .375 | 22272 |
| 2 | 5 | .062, .125, .250, .375, .500 | 22273 |

All standard items are available with TiAIN coating from stock or short delivery. Please contact Pilot Precision Products for details.

Additional Sizes - Metric - Keyway

28 thru 45mm sizes

Stock Keyway Broaches / Optional Metric Keyway Broaches

Broaches are supplied with necessary Shims unless otherwise noted. For extra or replacement Shims see the table below.

| Broach Size (mm) | Tolerances (Decimal Equiv.) | Broach Dimensions (inches) | Standard Millimeter Keys | Shims Req'd | Length of Cut (inches) | | Pressure Required. for Max. L/C (lbs.)* | EDP No | | | |
|------------------|-----------------------------|----------------------------|--------------------------|-------------|------------------------|------|---|-------------|------------|--------------|---------------|
| | | | | | Min. | Max. | | duMONT Std. | duMONT TiN | duMONT TiAIN | Hassay Savage |
| 28 | 1.1025 – 1.1035 | 1-1/8 x 20-1/4 | 28 x 16 | 5 | 1 | 6 | 12,000 | 10233 | - | - | 11628 |
| 32 | 1.2600 – 1.2610 | 1-1/4 x 20-1/4 | 32 x 18 | 5 | 1-1/2 | 8 | 20,600 | 10234 | - | - | 11632 |
| 36 | 1.4175 – 1.4185 | 1-7/16 x 20-1/4 | 36 x 20 | ** | 1-1/2 | 8 | 24,200 | 10235 | - | - | 11636 |
| 40 | 1.5753 – 1.5760 | 1-9/16 x 20-1/4 | 40 x 22 | ** | 1-1/2 | 8 | 22,500 | 10236 | - | - | - |
| 45 | 1.7718 – 1.7728 | 1-3/4 x 20-1/4 | 45 x 25 | ** | 1-1/2 | 8 | 27,200 | 10237 | - | - | - |

*Based on mild steel **Shims are not supplied with these broaches, sold as Progressive Shims only, see below

Extra Shims

Extra Shims are provided in necessary Shim Sets only. Shims are available as special items for Broaches larger than 32mm progressive. Please specify EDP No. when ordering extra or replacement Shims. Shims correspond to Broach size, not to Bushing type.

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|----------------|----------------|
| 28 | 5 | 0.0560 | 44478 |
| 32 | | 0.0625 | 44479 |

■ 1-1/8" to 2" & 28 mm to 45 mm broaches need special order bushings. Please provide bore diameter to quote.



Progressive Shims

| Broach Size (mm) | # / Set | Shim Thickness | EDP No. duMONT |
|------------------|---------|-------------------------|----------------|
| 36 | 3 | .062, .125, .250 | 44578 |
| 40 | 3 | .062, .125, .250 | 44579 |
| 45 | 4 | .062 (2pcs), .125, .250 | 44580 |

SPECIAL ORDERS: We are fully equipped to manufacture Special Bushings not listed above. Please contact Pilot Precision Products for details.

duMONT Minute Man® / Hassay Savage

One-Pass Keyway Broaches

1/8 thru 3/8 inch sizes

3mm thru 14mm

Applications: **High Speed Operation | Accurate Small Run Production**

One-Pass Keyway Broaches are designed for smaller production runs of identical keyways in varying bores. Used with the appropriate Bushing size (American Standard or Metric) and Style (see pages 10 and 12) to cut to full width and depth in one-pass, no shimming required. Reminder – Broach and Bushing Style must match – “A / I” Broaches with “A / I” Bushings, “B / II” Broaches with “B / II” Bushings, etc. A special chamfering feature that will deburr the keyway while it is being broached is also available.

TiN or TiAlN coatings available.



Stock One-Pass Broaches – Inch

| Broach Size (inch) | Broach Dimensions | Tolerances (Decimal Equiv.) | Tooth Pitch | Length of Cut* (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. duMONT |
|--------------------|-------------------|-----------------------------|-------------|-------------------------|---------|--|----------------|
| | | | | Min. | Max. | | |
| 1/8-B / II | 3/16 x 10-3/4 | .1252 – .1262 | 1/4 | 19/64 | 1-11/16 | 800 | 55507 |
| 5/32-B / II | 3/16 x 10-3/4 | .1564 – .1574 | | | | 1,450 | 55508 |
| 3/16-B / II | 3/16 x 10-3/4 | .1877 – .1887 | | | | 2,050 | 55509 |
| 1/8-C / III | 3/8 x 14-1/8 | .1252 – .1262 | 9/32 | 19/64 | 2 | 900 | 55501 |
| 5/32-C / III | 3/8 x 14-1/8 | .1564 – .1574 | | | | 1,360 | 55502 |
| 3/16-C / III | 3/8 x 17 | .1877 – .1887 | | | | 1,570 | 55503 |
| 1/4-C / III | 3/8 x 17 | .2502 – .2512 | | | | 2,560 | 55504 |
| 5/16-C / III | 3/8 x 18-1/2 | .3127 – .3137 | | | | 3,900 | 55505 |
| 3/8-C / III | 3/8 x 18-1/2 | .3755 – .3765 | | | | 5,300 | 55506 |

Stock One-Pass Metric Keyway Broaches

| Broach Size (mm) | Broach Dimensions | Tolerances (Decimal Equiv.) | Tooth Pitch | Length of Cut* (inches) | | Pressure Required for Max. L/C (lbs.)* | EDP No. | |
|------------------|-------------------|-----------------------------|-------------|-------------------------|-------|--|---------|---------------|
| | | | | Min. | Max. | | duMONT | Hassay Savage |
| 3-A / I | 1/8 x 7-3/4 | 0.1176 – 0.1185 | 3/16 | 13/64 | 1 | 675 | 55510 | 11103-OP** |
| 4-B1 / II | 1/4 x 10-3/4 | 0.1569 – 0.1579 | 1/4 | 3/8 | 1-5/8 | 1,550 | 55511 | 11204-COP*** |
| 5-B1 / II | | 0.1963 – 0.1972 | | | | 2,430 | 55512 | 11205-COP*** |
| 6-C / III | 3/8 x 17 | 0.2356 – 0.2366 | 9/32 | 3/8 | 1-3/4 | 2,240 | 55513 | 11306-COP*** |
| 8-C / III | 3/8 x 18-1/2 | 0.3143 – 0.3155 | 5/16 | | | 2 | 3,485 | 55514 |
| 10-D / IV | 9/16 x 24 | 0.3930 – 0.3942 | 3/8 | 25/64 | 2 | 3,410 | 55515 | - |
| 12-D / IV | | 0.4716 – 0.4730 | | | | 4,220 | 55516 | - |
| 14-D / IV | | 0.5503 – 0.5517 | | | | 5,670 | 55517 | - |

*Based on mild steel

OP** designates one-pass, no chamfer

COP*** designates chamfer one pass

Note: 4mm—12mm keyway broaches have deburring feature

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

SPECIAL ORDERS: We are fully equipped to manufacture Special One-Pass Broaches to your specifications. A special chamfering feature that will deburr the keyway while it is being broached is also available. TiN or TiAlN coatings are available. Please contact Pilot Precision Products for details.

Production Push-type Keyway Broaches


Applications: **High Speed Operation | Accurate Long Run Production**



Production Keyway Broaches

Production Keyway Broaches offer maximum speed and accuracy in production runs of identical bores, using either hydraulic or hand-operated presses. These Broaches are self-supporting—no Shims or Bushings are required.

Production Broach Construction

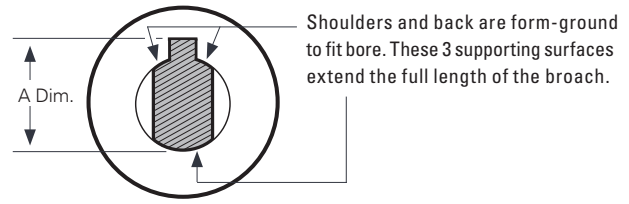

Stock Production Keyway Broaches

Production Keyway Broaches are designed for large production runs of identical keyways with identical bores. No Shims or Bushings required. A special chamfering feature that will deburr the keyway while it is being broached is also available.

TiN or TiAlN coatings available.

| Keyway Width | Body Diameter | A Dimension | Broach Length | Tooth Pitch | Length of Cut* | | Pressure Required. for Max. L/C (lbs.) | EDP No. duMONT |
|--------------|---------------|-------------|---------------|-------------|----------------|-------|--|----------------|
| | | | | | Min. | Max. | | |
| 1/16" | 3/16" | .224" | 5-5/8 | 3/16 | 13/64 | 1 | 390 | 55520 |
| | 1/4" | .287" | 6-3/16 | 3/16 | 13/64 | 1 | 390 | 55521 |
| 1/8" | 3/8" | .437" | 8-1/2 | 1/4 | 17/64 | 1-1/4 | 850 | 55522 |
| | 1/2" | .565" | 11-3/4 | 3/8 | 25/64 | 2-1/2 | 1,440 | 55523 |
| | 9/16" | .630" | 11-3/4 | 3/8 | 25/64 | 2-1/2 | 1,440 | 55524 |
| | 5/8" | .693" | 11-3/4 | 3/8 | 25/64 | 2-1/2 | 1,440 | 55525 |
| 3/16" | 5/8" | .716" | 14-3/4 | 3/8 | 25/64 | 2-1/2 | 2,170 | 55526 |
| | 3/4" | .844" | | | | | | 55528 |
| | 7/8" | .970" | | | | | | 55530 |
| 1/4" | 1" | 1.121" | 18 | 3/8 | 25/64 | 2-1/2 | 2,870 | 55532 |
| 4mm | 10mm | 11.9mm | 12 | 9/32 | 19/64 | 1-7/8 | 1,550 | 55533** |
| | | .468" | | | | | | |

*Based on mild steel

** Includes Chamfer

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

SPECIAL ORDERS: We are fully equipped to manufacture Special Production Style Broaches to your specifications. A special chamfering feature that will deburr the keyway while it is being broached is also available. Please contact Pilot Precision Products for details.

Square Push Broaches

1/8 thru 1 inch sizes

4mm thru 25mm sizes



Applications: **Drives, jigs, fixtures and other square broaching operations**




Square Push Broaches

Our Standard Square Broaches are designed to generate in one-pass a Standard Square hole in a previously cast or drilled round hole. Standard Square Broaches begin in an oversized pilot hole and generate the square hole while leaving small radii on the flats. Available from stock in the most

common American Standard / Metric sizes (1/8–1" & 4mm–25mm).

TiN or TiAlN coatings available.

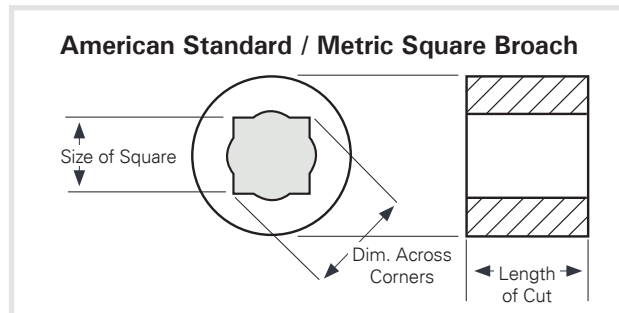

Stock Standard Square Broaches

| Square Size (inch) | Tolerances | Broach Length | Pilot Diameter | Drill Size | Dimension Across Corners | Tooth Pitch | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | |
|--------------------|----------------|---------------|----------------|------------|--------------------------|-------------|---------------|-------|--|---------|---------------|
| | | | | | | | Min. | Max. | | duMONT | Hassay Savage |
| 1/8 | .1255 – .1265 | 4-1/8 | .1285 | No. 30 | .1750 – .1770 | 1/8 | 3/16 | 1/2 | 700 | 66601 | 13008 |
| 5/32 | .1565 – .1575 | 5-1/8 | .1590 | No. 21 | .2180 – .2200 | 5/32 | 1/4 | 1/2 | 600 | 66602 | 13010 |
| 3/16 | .1880 – .1890 | 5-9/16 | .1935 | No. 10 | .2620 – .2640 | | 1/4 | 5/8 | 1,080 | 66603 | 13012 |
| 7/32 | .2190 – .2200 | 6-3/8 | .2280 | No. 1 | .3060 – .3080 | 3/16 | 1/4 | 3/4 | 1,410 | 66604 | 13014 |
| 1/4 | .2505 – .2515 | 6-1/2 | .2656 | 17/64 | .3510 – .3530 | | 3/4 | 1,740 | 66605 | 13016 | |
| 9/32 | .2815 – .2825 | 7-3/4 | .2969 | 19/64 | .3930 – .3950 | 7/32 | 5/16 | 1 | 2,130 | 66606 | 13018 |
| 5/16 | .3130 – .3140 | 7-7/8 | .3281 | 21/64 | .4370 – .4390 | | 3/8 | 1 | 2,100 | 66607 | 13020 |
| 11/32 | .3440 – .3450 | 9-3/8 | .3594 | 23/64 | .4830 – .4850 | 1/4 | 3/8 | 1-1/4 | 3,480 | 66608 | 13022 |
| 3/8 | .3755 – .3765 | 9-3/8 | .3906 | 25/64 | .5240 – .5260 | | 1-1/4 | 3,720 | 66609 | 13024 | |
| 13/32 | .4065 – .4075 | 10-5/8 | .4219 | 27/64 | .5690 – .5710 | 9/32 | 1/2 | 1-3/8 | 4,080 | 66610 | 13026 |
| 7/16 | .4380 – .4390 | 10-7/8 | .4531 | 29/64 | .6110 – .6130 | | 1-3/8 | 4,500 | 66611 | 13028 | |
| 15/32 | .4690 – .4700 | 12 | .5000 | 1/2 | .6570 – .6590 | 5/16 | 1/2 | 1-3/8 | 4,000 | 66612 | 13030 |
| 1/2 | .5005 – .5015 | 12 | .5312 | 17/32 | .6990 – .7010 | | 1-3/8 | 4,500 | 66613 | 13032 | |
| 9/16 | .5630 – .5640 | 14-3/4 | .5938 | 19/32 | .7870 – .7890 | 3/8 | 1/2 | 1-1/2 | 5,700 | 66614 | 13036 |
| 5/8 | .6260 – .6270 | 16-5/16 | .6562 | 21/32 | .8730 – .8750 | | 1-1/2 | 5,920 | 66615 | 13040 | |
| 11/16 | .6885 – .6895 | 17-3/4 | .7500 | 3/4 | .9630 – .9650 | 7/16 | 5/8 | 1-5/8 | 4,800 | 66616 | 13044 |
| 3/4 | .7510 – .7520 | 17-3/4 | .8125 | 13/16 | 1.0450 – 1.0470 | | 1-5/8 | 5,940 | 66617 | 13048 | |
| 7/8 | .8765 – .8775 | 22-3/4 | .9375 | 15/16 | 1.2270 – 1.2290 | 7/16 | 5/8 | 2 | 9,200 | 66618 | 13056 |
| 1 | 1.002 – 1.0030 | 24-1/8 | 1.0938 | 1-3/32 | 1.4030 – 1.4050 | | 2 | 9,200 | 66619 | 13064 | |

Stock Metric Standard Square Broaches

| Square Size (mm) | Tolerances (Dec. Equiv.) | Broach Length | Pilot Diameter | Drill Size | Dimension Across Corners | Tooth Pitch | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | |
|------------------|--------------------------|---------------|----------------|------------|--------------------------|-------------|---------------|-------|--|---------|---------------|
| | | | | | | | Min. | Max. | | duMONT | Hassay Savage |
| 4 | .1575 – .1580 | 5-1/8 | .1614 | 4.1 | .2205 – .2220 | 5/32 | 1/4 | 1/2 | 480 | 66630 | 17001 |
| 5 | .1968 – .1973 | 6-1/2 | .2047 | 5.2 | .2765 – .2780 | | 1/2 | 800 | 66631 | 17002 | |
| 6 | .2362 – .2370 | 6-11/16 | .2519 | 6.4 | .3300 – .3320 | 3/16 | 1/4 | 3/4 | 1,300 | 66632 | 17003 |
| 7 | .2756 – .2764 | 7-3/4 | .2913 | 7.4 | .3850 – .3870 | | 3/4 | 1,800 | 66633 | - | |
| 8 | .3150 – .3158 | 7-7/8 | .3307 | 8.4 | .4400 – .4420 | 7/32 | 3/8 | 1 | 2,300 | 66634 | 17004 |
| 9 | .3543 – .3551 | 9-3/8 | .3701 | 9.4 | .4970 – .4990 | | 1 | 3,500 | 66639 | - | |
| 10 | .3937 – .3945 | 10-1/4 | .4094 | 10.4 | .5530 – .5550 | 1/4 | 3/8 | 1-1/4 | 3,600 | 66635 | 17005 |
| 12 | .4724 – .4732 | 12 | .5039 | 12.8 | .6620 – .6640 | | 1-1/4 | 4,200 | 66636 | 17006 | |
| 14 | .5512 – .5520 | 14-3/4 | .5826 | 14.8 | .7730 – .7750 | 5/16 | 1/2 | 1-3/8 | 4,200 | 66636 | 17006 |
| 16 | .6302 – .6310 | 16-5/16 | .6614 | 16.8 | .8790 – .8810 | | 1-3/8 | 5,600 | 66637 | 17007 | |
| 18 | .7090 – .7097 | 17-7/8 | .7716 | 19.6 | .9930 – .9950 | 3/8 | 1/2 | 1-1/2 | 6,000 | 66638 | 17008 |
| 20 | .7874 – .7882 | 20-7/8 | .8504 | 21.6 | 1.1030 – 1.1050 | | 1-1/2 | 5,200 | 66640 | 17009 | |
| 22 | .8663 – .8671 | 22-3/4 | .9291 | 23.6 | 1.2130 – 1.2150 | 7/16 | 5/8 | 1-5/8 | 6,600 | 66641 | 17010 |
| 24 | .9453 – .9460 | 24 | 1.0079 | 25.6 | 1.3230 – 1.3250 | | 1-5/8 | 9,200 | 66642 | 17011 | |
| 25 | .9845 – .9852 | 24-1/8 | 1.0630 | 27.0 | 1.3790 – 1.3810 | 2 | 9,200 | 66643 | 17012 | | |
| | | | | | | | | | 9,200 | 66644 | 17013 |

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

SPECIAL ORDERS: We are fully equipped to manufacture Special Full Square Broaches and Special Metric Square Broaches not listed above to your specifications. Please contact Pilot Precision Products for details.



duMONT Minute Man® / Hassay Savage

Full Square Push Broaches

3/16 thru 1/2 inch

Applications: **Drives, jigs, fixtures, sizing and finishing**


Full Square Broaches

Our Full Square Broaches are designed to generate in one-pass a Full Square hole in a previously cast or drilled round hole. The Broach leaves no radii on the flats of the broached piece and the pilot diameter equals the finished full square size.

TiN or TiAlN coatings available.



Dimensions of Standard Full Square Broach Holes

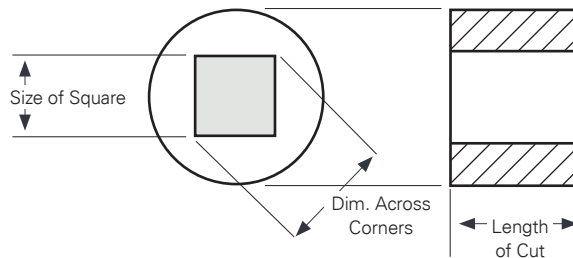

Stock Full Square Broaches

| Full Square Size (inch) | Tolerances (Dec. Equiv.) | Broach Length | Pilot Diameter | Drill Size | Dimension Across Corners | Tooth Pitch | Length of Cut | | Pressure Required for Max. L/C (lbs.) | EDP No. | |
|-------------------------|--------------------------|---------------|----------------|------------|--------------------------|-------------|---------------|------|---------------------------------------|---------|---------------|
| | | | | | | | Min. | Max. | | duMONT | Hassay Savage |
| 3/16 | .1880 – .1890 | 6 | 3/16 | 3/16 | .2630 – .2650 | 1/8 | 3/16 | 1/2 | 870 | 66403 | 14012 |
| 1/4 | .2505 – .2515 | 8-1/2 | 1/4 | 1/4 | .3510 – .3530 | 5/32 | 1/4 | 5/8 | 1,310 | 66405 | 14016 |
| 5/16 | .3130 – .3140 | 10-1/2 | 5/16 | 5/16 | .4390 – .4410 | 3/16 | 5/16 | 7/8 | 1,895 | 66407 | 14020 |
| 3/8 | .3755 – .3765 | 13-1/8 | 3/8 | 3/8 | .5260 – .5280 | 7/32 | 5/16 | 1 | 2,410 | 66409 | 14024 |
| 7/16 | .4385 – .4395 | 14-1/4 | 7/16 | 7/16 | .6140 – .6160 | 1/4 | 3/8 | 1 | 3,090 | 66411 | 14028 |
| 1/2 | .5005 – .5015 | 14-3/4 | 1/2 | 1/2 | .7010 – .7030 | 1/4 | 3/8 | 1 | 3,860 | 66413 | 14032 |

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

Round Push Broaches

1/4 thru 1 inch

Applications: **Drives, jigs, fixtures, sizing and finishing**

***Non-Stock Standards - Made to Order**

Round Broaches

duMONT Minute Man® and Hassay Savage Round Broaches are designed to generate in one-pass a precision round hole in a previously cast, drilled or reamed round hole. These Internal Hole Broaches are ideal for precise tolerances, sizing and finish for those applications demanding precision and finish. Broaches are finished with variable pitch teeth and available in American Standard sizes. A burnishing section can be furnished. Metric sizes available upon request.

TiN or TiAlN coatings available.



Stock Round Broaches

| Nominal Diameter (inch) | Tolerances | Broach Length | Pilot Diameter | Drill Size | Length of Cut | | Pressure Required for Max. L/C (lbs.) | EDP No. duMONT |
|-------------------------|-----------------|---------------|----------------|------------|---------------|-------|---------------------------------------|----------------|
| | | | | | Min. | Max. | | |
| 1/4 | .2505 – .2510 | 5-7/8 | .2344 | 15/64 | 5/16 | 3/4 | 840 | 77730 |
| 5/16 | .3130 – .3135 | | .2469 | 19/64 | | | 1,050 | 77731 |
| 3/8 | .3755 – .3760 | 6-7/8 | .3594 | 23/64 | 3/8 | 1 | 1,440 | 77732 |
| 7/16 | .4380 – .4385 | | .4219 | 27/64 | | | 1,680 | 77733 |
| 1/2 | .5005 – .5010 | 8 | .4844 | 31/64 | 1/2 | 1-1/4 | 2,240 | 77734 |
| 5/8 | .6255 – .6260 | 8-1/2 | .6094 | 39/64 | | | 2,500 | 77736 |
| 3/4 | .7505 – .7510 | 9-1/8 | .7344 | 47/64 | 5/8 | 1-1/2 | 3,720 | 77738 |
| 7/8 | .8755 – .8765 | | .8594 | 55/64 | | | 4,340 | 77740 |
| 1 | 1.0005 – 1.0015 | 10-1/4 | .9844 | 63/64 | 5/8 | 1-3/4 | 4,970 | 77742 |

Hexagon Push Broaches

1/8 thru 1 inch sizes

4mm thru 25mm sizes

Applications: Drives, jigs, fixtures and other hexagonal broaching operations


Hexagon Broaches

Our Hexagon Broaches are designed to generate in one-pass a Hexagon hole in a previously cast or drilled round hole. Available from stock in the most common American Standard / Metric sizes (1/8-1" & 4mm-25mm).

TiN or TiAlN coatings available.



American Standard / Metric Square Broach

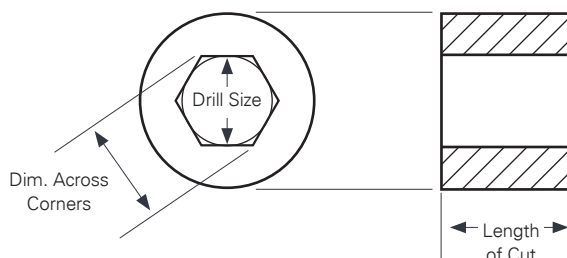

Stock Hexagon Broaches

| Hex Size (inch) | Tolerances | Broach Length | Pilot Diameter | Drill Size | Dimension Across Corners | Tooth Pitch | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | |
|-----------------|-----------------|---------------|----------------|------------|--------------------------|-------------|---------------|-------|--|---------|---------------|
| | | | | | | | Min. | Max. | | duMONT | Hassay Savage |
| 1/8 | .1255 - .1265 | 4-1/8 | 1/8 | 1/8 | .1445 - .1455 | 1/8 | 3/16 | 3/8 | 200 | 77701 | 12008 |
| 5/32 | .1565 - .1575 | 4-15/16 | 5/32 | 5/32 | .1800 - .1815 | 1/8 | 1/4 | 1/2 | 300 | 77702 | 12010 |
| 3/16 | .1880 - .1890 | 5-1/16 | 3/16 | 3/16 | .2160 - .2180 | 5/32 | 1/4 | 5/8 | 560 | 77703 | 12012 |
| 7/32 | .2190 - .2200 | 5-3/8 | 7/32 | 7/32 | .2500 - .2520 | 5/32 | 1/4 | 3/4 | 775 | 77704 | 12014 |
| 1/4 | .2505 - .2515 | 6 | 1/4 | 1/4 | .2870 - .2890 | 3/16 | 1/4 | 3/4 | 1,025 | 77705 | 12016 |
| 9/32 | .2815 - .2825 | 7-1/4 | 9/32 | 9/32 | .3230 - .3250 | 3/16 | 5/16 | 1 | 1,290 | 77706 | 12018 |
| 5/16 | .3130 - .3140 | 7-3/4 | 5/16 | 5/16 | .3590 - .3610 | 7/32 | 3/8 | 1 | 1,510 | 77707 | 12020 |
| 11/32 | .3440 - .3450 | 7-3/4 | 11/32 | 11/32 | .3950 - .3970 | 7/32 | 3/8 | 1-1/4 | 2,280 | 77708 | 12022 |
| 3/8 | .3755 - .3765 | 8-1/2 | 3/8 | 3/8 | .4310 - .4330 | 7/32 | 3/8 | 1-1/4 | 2,400 | 77709 | 12024 |
| 13/32 | .4065 - .4075 | 9-5/8 | 13/32 | 13/32 | .4670 - .4690 | 7/32 | 1/2 | 1-3/8 | 2,790 | 77710 | 12026 |
| 7/16 | .4380 - .4390 | 10-1/2 | 7/16 | 7/16 | .5040 - .5060 | 1/4 | 1/2 | 1-3/8 | 2,700 | 77711 | 12028 |
| 15/32 | .4690 - .4700 | 11-7/8 | 15/32 | 15/32 | .5390 - .5410 | 9/32 | 1/2 | 1-3/8 | 2,700 | 77712 | 12030 |
| 1/2 | .5005 - .5015 | 11-7/8 | 1/2 | 1/2 | .5750 - .5770 | 9/32 | 1/2 | 1-3/8 | 3,025 | 77713 | 12032 |
| 9/16 | .5630 - .5640 | 13-3/4 | 9/16 | 9/16 | .6480 - .6500 | 5/16 | 1/2 | 1-5/8 | 4,800 | 77714 | 12036 |
| 5/8 | .6260 - .6270 | 16-1/4 | 5/8 | 5/8 | .7200 - .7220 | 5/16 | 1/2 | 1-5/8 | 5,400 | 77715 | 12040 |
| 11/16 | .6885 - .6895 | 16-3/4 | 11/16 | 11/16 | .7920 - .7940 | 5/16 | 1/2 | 1-5/8 | 6,000 | 77716 | 12044 |
| 3/4 | .7510 - .7520 | 17-1/4 | 3/4 | 3/4 | .8650 - .8670 | 3/8 | 5/8 | 2 | 6,960 | 77717 | 12048 |
| 7/8 | .8765 - .8775 | 18-1/2 | 7/8 | 7/8 | 1.0080 - 1.0100 | 3/8 | 5/8 | 2 | 8,400 | 77718 | 12056 |
| 1 | 1.0020 - 1.0030 | 19-3/4 | 1 | 1 | 1.1520 - 1.1540 | 3/8 | 5/8 | 2 | 11,100 | 77719 | 12064 |

Stock Metric Hexagon Broaches

| Hexagon (mm) | Tolerances (Dec. Equiv.) | Broach Length | Pilot Diameter | Drill Size | Dimension Across Corners | Tooth Pitch | Length of Cut | | Pressure Required. for Max. L/C (lbs.) | EDP No. | |
|--------------|--------------------------|---------------|----------------|------------|--------------------------|-------------|---------------|-------|--|---------|---------------|
| | | | | | | | Min. | Max. | | duMONT | Hassay Savage |
| 4 | .1575 - .1580 | 4-15/16 | .1575 | 4.0 | .1810 - .1825 | 1/8 | 1/4 | 1/2 | 300 | 77750 | 12104 |
| 5 | .1968 - .1973 | 5-3/8 | .1968 | 5.0 | .2260 - .2275 | 5/32 | 1/4 | 3/4 | 775 | 77751 | 12105 |
| 6 | .2362 - .2370 | 6 | .2362 | 6.0 | .2710 - .2730 | 3/16 | 1/4 | 3/4 | 1,025 | 77752 | 12106 |
| 7 | .2756 - .2764 | 7-1/4 | .2756 | 7.0 | .3170 - .3190 | 7/32 | 1/4 | 1 | 1,290 | 77753 | 12107 |
| 8 | .3150 - .3158 | 7-3/4 | .3150 | 8.0 | .3620 - .3640 | 7/32 | 3/8 | 1 | 1,510 | 77754 | 12108 |
| 9 | .3545 - .3555 | 8-1/2 | .3543 | 9.0 | .4090 - .4110 | 1/4 | 3/8 | 1-1/4 | 2,300 | 77759 | - |
| 10 | .3937 - .3945 | 9-5/8 | .3937 | 10.0 | .4530 - .4550 | 9/32 | 1/2 | 1-3/8 | 2,790 | 77755 | 12110 |
| 12 | .4724 - .4732 | 11-7/8 | .4724 | 12.0 | .5430 - .5450 | 5/16 | 1/2 | 1-3/8 | 2,700 | 77756 | 12112 |
| 14 | .5512 - .5520 | 13-3/4 | .5512 | 14.0 | .6350 - .6370 | 3/8 | 1/2 | 1-5/8 | 4,800 | 77757 | 12114 |
| 16 | .6302 - .6310 | 16-1/4 | .6299 | 16.0 | .7250 - .7270 | 3/8 | 5/8 | 2 | 5,400 | 77758 | 12116 |
| 18 | .7092 - .7097 | 16-3/4 | .7087 | 18.0 | .8170 - .8190 | 3/8 | 5/8 | 2 | 6,400 | 77760 | 12118 |
| 20 | .7876 - .7886 | 17-5/8 | .7874 | 20.0 | .9050 - .9070 | 3/8 | 5/8 | 2 | 7,200 | 77761 | 12120 |
| 22 | .8664 - .8674 | 18-1/2 | .8661 | 22.0 | .9990 - 1.0010 | 3/8 | 5/8 | 2 | 8,200 | 77762 | 12122 |
| 24 | .9450 - .9460 | 19-1/2 | .9449 | 24.0 | 1.0890 - 1.0910 | 3/8 | 5/8 | 2 | 9,700 | 77763 | 12124 |
| 25 | .9845 - .9855 | 19-3/4 | .9842 | 25.0 | 1.1350 - 1.1370 | 3/8 | 5/8 | 2 | 11,000 | 77764 | 12125 |

duMONT Minute Man® / Hassay Savage



Pull-Type Keyway Broaches

1/16 thru 1 inch sizes



Applications: **For high volume production pull-type machines**
***Non-Stock Standards - Made to Order**

Industry Standard 500 and 600 Series

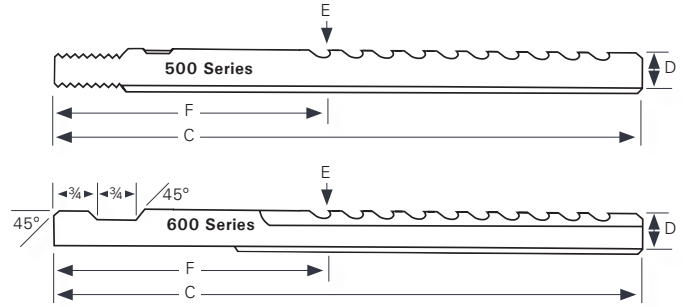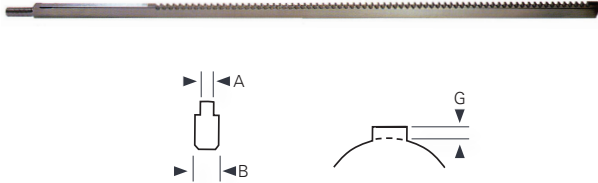

Industry Standard 500 and 600 Series

duMONT Minute Man® and Hassay Savage brands offer the most common American Standard (1/16–1”) Pull-Type Keyway Broaches for use in high volume production. Available either as Industry Standard 500 Series with threaded pull end or 600 Series with notched pull end.

| Nom. Dim. | A Decimal Dim.t | Min. Hole Size | Min Length Cut# | Max Length Cut* | B | C | D | E | F | G | No. of Passes | Thread Size | EDP No. | | | |
|-----------|--------------------|----------------|-----------------|-----------------|--------|----|-------|-------|----------|------|---------------|-------------|-------------------|-------------------|-------------------|-------------------|
| | | | | | | | | | | | | | duMONT 500 Series | duMONT 600 Series | Hassay 500 Series | Hassay 600 Series |
| 1/16 | .0635 | 3/8 | 3/8 | 1-1/4 | .1552 | 20 | .313 | .271 | 7-13/16 | .042 | 1 | 1/4 – 20 | 10501S | 10601S | - | 33601 |
| 3/32 | .0948 | 7/16 | 1/2 | 1-1/2 | .1865 | 24 | .367 | .309 | 8-1/4 | .058 | 1 | 5/16 – 18 | 10502S | 10602S | - | 33602 |
| 3/32 | .0948 | 9/16 | 5/8 | 2-1/2 | .2490 | 33 | .491 | .433 | 10 | .058 | 1 | 3/8 – 16 | 10503S | 10603S | - | 33603 |
| 1/8 | .1260 | 1/2 | 1/2 | 1-1/2 | .2490 | 30 | .438 | .364 | 9 | .074 | 1 | 3/8 – 16 | 10504S | 10604S | - | 33604 |
| 1/8 | .1260 | 11/16 | 5/8 | 2-1/2 | .3115 | 33 | .594 | .520 | 10 | .074 | 1 | 1/2 – 13 | 10505S | 10605S | - | 33605 |
| 5/32 | .1572 | 19/32 | 1/2 | 1-1/2 | .2490 | 30 | .525 | .436 | 9 | .089 | 1 | 3/8 – 16 | 10506S | 10606S | - | 33606 |
| 5/32 | .1572 | 23/32 | 5/8 | 2-1/2 | .3115 | 33 | .625 | .536 | 10 | .089 | 1 | 1/2 – 13 | 10507S | 10607S | - | 33607 |
| 3/16 | .1885 | 11/16 | 5/8 | 2-1/2 | .3740 | 36 | .581 | .476 | 10 | .105 | 1 | 1/2 – 13 | 10508S | 10608S | - | 33608 |
| 3/16 | .1885 | 7/8 | 11/16 | 3-1/2 | .3740 | 36 | .796 | .691 | 10-11/16 | .105 | 1 | 1/2 – 13 | 10509S | 10609S | - | 33609 |
| 7/32 | .2198 | 11/16 | 5/8 | 2-1/2 | .3740 | 33 | .557 | .437 | 10 | .120 | 1 | 1/2 – 13 | 10510S | 10610S | - | 33610 |
| 7/32 | .2198 | 15/16 | 11/16 | 3-1/2 | .3740 | 42 | .813 | .693 | 11-1/16 | .120 | 1 | 1/2 – 13 | 10511S | 10611S | - | 33611 |
| 1/4 | .2510 | 3/4 | 5/8 | 2-1/2 | .3740 | 36 | .612 | .476 | 10 | .136 | 1 | 1/2 – 13 | 10512S | 10612S | - | 33612 |
| 1/4 | .2510 | 1 | 11/16 | 4 | .4990 | 45 | .877 | .741 | 12 | .136 | 1 | 5/8 – 11 | 10513S | 10613S | - | 33613 |
| 1/4 | .2510 | 1-3/8 | 7/8 | 6 | .6240 | 51 | 1.250 | 1.114 | 13-3/4 | .136 | 1 | 3/4 – 10 | 10514S | 10614S | - | 33614 |
| 9/32 | .2828 | 7/8 | 11/16 | 4 | .4990 | 42 | .716 | .564 | 11-5/8 | .152 | 1 | 5/8 – 11 | 10515S | 10615S | - | 33615 |
| 9/32 | .2828 | 1-1/4 | 7/8 | 6 | .4990 | 51 | 1.093 | .941 | 13-1/2 | .152 | 1 | 5/8 – 11 | 10516S | 10616S | - | 33616 |
| 5/16 | .3140 | 1-1/16 | 11/16 | 4 | .4990 | 45 | .908 | .741 | 12 | .167 | 1 | 5/8 – 11 | 10517S | 10617S | - | 33617 |
| 5/16 | .3140 | 1-5/16 | 7/8 | 6 | .4990 | 51 | 1.158 | .991 | 13-3/4 | .167 | 1 | 5/8 – 11 | 10518S | 10618S | - | 33618 |
| 3/8 | .3765 | 1-9/16 | 11/16 | 4 | .4990 | 45 | .938 | .739 | 12 | .199 | 1 | 5/8 – 11 | 10519S | 10619S | - | 33619 |
| 3/8 | .3765 | 1-5/16 | 7/8 | 6 | .4990 | 54 | 1.189 | .990 | 13-1/2 | .199 | 1 | 5/8 – 11 | 10520S | 10620S | - | 33620 |
| 7/16 | .4390 | 1-9/16 | 11/16 | 4 | .6240 | 48 | 1.390 | 1.160 | 12 | .230 | 1 | 3/4 – 10 | 10521S | 10621S | - | 33621 |
| 7/16 | .4390 | 1-3/4 | 1 | 8 | .6240 | 48 | 1.611 | 1.496 | 15-5/8 | .230 | 2 | 3/4 – 10 | 10522S | 10622S | - | 33622 |
| 1/2 | .5015 | 1-1/2 | 11/16 | 4 | .6240 | 48 | 1.312 | 1.051 | 12 | .261 | 1 | 3/4 – 10 | 10523S | 10623S | - | 33623 |
| 1/2 | .5015 | 1-9/16 | 1 | 8 | .6240 | 48 | 1.377 | 1.246 | 16-1/2 | .261 | 2 | 3/4 – 10 | 10524S | 10624S | - | 33624 |
| 9/16 | .5645 | 1-11/16 | 11/16 | 4 | .6865 | 54 | 1.438 | 1.146 | 11-13/16 | .292 | 1 | 1 – 8 | 10525S | 10625S | - | 33625 |
| 9/16 | .5645 | 1-5/8 | 1 | 8 | .6865 | 51 | 1.391 | 1.245 | 16 | .292 | 2 | 1 – 8 | 10526S | 10626S | - | 33626 |
| 9/16 | .5645 | 1-15/16 | 1-1/8 | 12 | .8740 | 60 | 1.641 | 1.495 | 20 | .292 | 2 | 1 – 8 | 10527S | 10627S | - | 33627 |
| 5/8 | .6270 | 1-7/8 | 1-1/16 | 4 | .7490 | 60 | 1.625 | 1.301 | 12 | .324 | 1 | 1 – 8 | 10528S | 10628S | - | 33628 |
| 5/8 | .6270 | 1-15/16 | 1 | 8 | .8740 | 54 | 1.657 | 1.495 | 16-3/8 | .324 | 2 | 1 – 8 | 10529S | 10629S | - | 33629 |
| 5/8 | .6270 | 1-15/16 | 1-1/8 | 12 | .8740 | 60 | 1.657 | 1.495 | 20 | .324 | 2 | 1 – 8 | 10530S | 10630S | - | 33630 |
| 3/4 | .7520 | 1-15/16 | 11/16 | 4 | .8740 | 60 | 1.625 | 1.239 | 12 | .386 | 1 | 1 – 8 | 10531S | 10631S | - | 33631 |
| 3/4 | .7520 | 2-1/16 | 1 | 8 | .9990 | 60 | 1.688 | 1.495 | 16-1/4 | .386 | 2 | 1-1/4 – 7 | 10532S | 10632S | 33532 | 33632 |
| 3/4 | .7520 | 2-1/16 | 1-1/8 | 12 | .9990 | 60 | 1.688 | 1.560 | 20 | .386 | 3 | 1-1/4 – 7 | 10533S | 10633S | 33533 | 33633 |
| 7/8 | .8770 | 2-1/4 | 11/16 | 4 | 1.1240 | 63 | 1.875 | 1.426 | 12-3/8 | .449 | 1 | 1-1/4 – 7 | 10534S | 10634S | 33534 | 33634 |
| 7/8 | .8770 | 2-1/8 | 1 | 8 | 1.1240 | 63 | 1.719 | 1.494 | 15-3/4 | .449 | 2 | 1-1/4 – 7 | 10535S | 10635S | 33535 | 33635 |
| 7/8 | .8770 | 2-1/8 | 1-1/8 | 12 | 1.1240 | 63 | 1.719 | 1.569 | 20 | .449 | 3 | 1-1/4 – 7 | 10536S | 10636S | 33536 | 33636 |
| 1 | 1.0020 | 2-1/4 | 5/8 | 2-1/2 | 1.2490 | 63 | 1.750 | 1.239 | 10-1/2 | .511 | 1 | 1-1/2 – 6 | 10537S | 10637S | 33537 | 33637 |
| 1 | 1.0020 | 2-1/4 | 7/8 | 6 | 1.2490 | 63 | 1.750 | 1.494 | 14-1/4 | .511 | 2 | 1-1/2 – 6 | 10538S | 10638S | 33538 | 33638 |
| 1 | 1.0020 | 2-1/4 | 1-1/8 | 12 | 1.2490 | 63 | 1.750 | 1.580 | 20 | .511 | 3 | 1-1/2 – 6 | 10539S | 10639S | 33539 | 33639 |

† Tolerance - Based on +/- .0005 # Minimum length of part recommended to prevent part from dropping in between broach teeth *Based on mild steel

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

Note: All items can be made with deburring feature as specials.



duMONT Minute Man® / Hassay Savage

Pull-Type Keyway Broaches

2mm thru 25mm 

Applications: For high volume production pull-type machines

Metric 2–25mm Pull-type Keyway Broaches

duMONT Minute Man® and Hassay Savage brands offer the most common Metric (2–25mm) Pull-Type Keyway Broaches for use in high volume production. Available either as Industry Standard 500 Series with threaded pull end or 600 Series with notched pull end. See image on page 16.

| Nom. Dim. | A Decimal Dim.† | Min. Hole Size (mm) | Min Length Cut# | Max Length Cut* | B | C | D | E | F | G | No. of Passes | Thread Size | EDP No. | |
|-----------|-----------------------|---------------------------|-----------------------|-----------------------|-----------------|------------|----------------|----------------|-----------------|--------------|------------------|----------------|--------------------------|--------------------------|
| | | | | | | | | | | | | | duMONT 500M Series | duMONT 600M Series |
| 2 | .0792 | 9 .354 | 9.5 3/8 | 31.8 1-1/4 | 3.942 .1552 | 508 20 | 7.95 .313 | 6.60 .260 | 197 7-3/4 | 1.35 .053 | 1 | 1/4 – 20 | 10561S | 10661S |
| 3 | .1186 | 11 .433 | 12.7 1/2 | 38 1-1/2 | 4.737 .1865 | 610 24 | 9.32 .367 | 7.49 .295 | 197 7-3/4 | 1.83 .072 | 1 | 5/16 – 18 | 10562S | 10662S |
| 4 | .1581 | 13 .512 | 12.7 1/2 | 38 1-1/2 | 6.325 .2490 | 838 33 | 11.13 .438 | 8.81 .347 | 229 9 | 2.31 .091 | 1 | 3/8 – 16 | 10563S | 10663S |
| | .1581 | 13 .512 | 15.9 5/8 | 63.5 2-1/2 | 6.325 .2490 | 915 36 | 11.07 .436 | 8.76 .345 | 254 10 | 2.31 .091 | | | 10564S | 10664S |
| 5 | .1974 | 14 .551 | 14.3 9/16 | 44.5 1-3/4 | 7.91 .3115 | 915 36 | 11.07 .436 | 8.18 .322 | 248 9-3/4 | 2.89 .114 | 1 | 1/2 – 13 | 10565S | 10665S |
| | .1974 | 23 .906 | 15.9 5/8 | 76.2 3 | 9.5 .3740 | 1067 42 | 2.65 .813 | 17.75 .699 | 279 11 | 2.89 .114 | | | 10566S | 10666S |
| 6 | .2368 | 18 .709 | 15.9 5/8 | 63.5 2-1/2 | 9.5 .3740 | 915 36 | 15.54 .612 | 11.96 .471 | 254 10 | 3.58 .141 | 1 | 1/2 – 13 | 10567S | 10667S |
| | .2368 | 26 1.024 | 17.5 11/16 | 102 4 | 12.67 .4990 | 1143 45 | 22.28 .877 | 18.69 .736 | 305 12 | 3.58 .141 | | | 10568S | 10668S |
| 8 | .3157 | 27 1.063 | 17.5 11/16 | 102 4 | 12.67 .4990 | 1143 45 | 23.06 .908 | 18.77 .739 | 305 12 | 4.29 .169 | 1 | 5/8 – 11 | 10569S | 10669S |
| | .3157 | 33 1.299 | 22.2 7/8 | 152 6 | 12.67 .4990 | 1295 51 | 29.41 1.158 | 25.12 .989 | 353 13-7/8 | 4.29 .169 | | | 10570S | 10670S |
| 10 | .3944 | 27 1.063 | 17.5 11/16 | 102 4 | 12.67 .4990 | 1143 45 | 23.27 .916 | 18.77 .739 | 305 12 | 4.49 .177 | 1 | 5/8 – 11 | 10571S | 10671S |
| | .3944 | 36 1.417 | 22.2 7/8 | 152 6 | 15.85 .6240 | 1295 51 | 31.75 1.250 | 27.25 1.073 | 353 13-7/8 | 4.49 .177 | | | 10572S | 10672S |
| 12 | .4733 | 39 1.535 | 17.5 11/16 | 102 4 | 15.85 .6240 | 1219 48 | 34.06 1.341 | 29.46 1.160 | 302 11-7/8 | 4.60 .181 | 1 | 3/4 – 10 | 10573S | 10673S |
| | .4733 | 39 1.535 | 25.4 1 | 203 8 | 15.85 .6240 | 1524 60 | 34.06 1.341 | 29.46 1.160 | 406 16 | 4.60 .181 | | | 10574S | 10674S |
| 14 | .552 | 40 1.575 | 17.5 11/16 | 102 4 | 17.44 .6865 | 1372 54 | 34.39 1.354 | 29.11 1.146 | 295 11-5/8 | 5.28 .208 | 1 | 1 – 8 | 10575S | 10675S |
| | .552 | 44 1.732 | 25.4 1 | 203 8 | 19.02 .7490 | 1524 60 | 38.33 1.509 | 33.04 1.301 | 400 15-3/4 | 5.28 .208 | | | 10576S | 10676S |
| 16 | .6308 | 47 1.850 | 17.5 11/16 | 102 4 | 19.02 .7490 | 1524 60 | 41.28 1.625 | 35.46 1.396 | 305 12 | 5.82 .229 | 1 | 1 – 8 | 10577S | 10677S |
| | .6308 | 48 1.890 | 28.6 1-1/8 | 305 12 | 22.2 .8740 | 1524 60 | 41.28 1.625 | 38.35 1.510 | 508 20 | 5.82 .229 | | | 10578S | 10678S |
| 18 | .7095 | 48 1.890 | 17.5 11/16 | 102 4 | 22.2 .8740 | 1524 60 | 41.28 1.625 | 35.26 1.388 | 305 12 | 6.02 .237 | 1 | 1 – 8 | 10579S | 10679S |
| | .7095 | 51 2.008 | 28.6 1-1/8 | 305 12 | 25.37 .9990 | 1524 60 | 42.88 1.688 | 39.85 1.569 | 513 20-3/16 | 6.02 .237 | | | 10580S | 10680S |
| 20 | .7884 | 56 2.205 | 17.5 11/16 | 102 4 | 28.55 1.1240 | 1600 63 | 47.63 1.875 | 4.94 1.612 | 302 11-7/8 | 6.68 .263 | 1 | 1-1/4 – 7 | 10581S | 10681S |
| | .7884 | 53 2.087 | 28.6 1-1/8 | 305 12 | 28.55 1.1240 | 1600 63 | 43.66 1.719 | 4.31 1.587 | 503 19-13/16 | 6.68 .263 | | | 10582S | 10682S |
| 22 | .8672 | 57 2.244 | 17.5 11/16 | 102 4 | 28.55 1.1240 | 1600 63 | 47.63 1.875 | 4.39 1.590 | 302 11-7/8 | 7.24 .285 | 1 | 1-1/4 – 7 | 10583S | 10683S |
| | .8672 | 53 2.087 | 28.6 1-1/8 | 305 12 | 28.55 1.1240 | 1600 63 | 43.66 1.719 | 4.03 1.576 | 503 19-13/16 | 7.24 .285 | | | 10584S | 10684S |
| 25 | .9853 | 56 2.205 | 17.5 11/16 | 102 4 | 31.72 1.2490 | 1600 63 | 44.45 1.750 | 36.98 1.456 | 270 10-5/8 | 7.47 .294 | 1 | 1-1/2 – 6 | 10585S | 10685S |
| | .9853 | 56 2.205 | 28.6 1-1/8 | 305 12 | 31.72 1.2490 | 1600 63 | 44.45 1.750 | 4.72 1.603 | 508 20 | 7.47 .294 | | | 10586S | 10686S |

† Tolerance - Based on +/- .0005 # Minimum length of part recommended to prevent part from dropping in between broach teeth *Based on mild steel

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

Note: All items can be made with deburring feature as specials.

duMONT Minute Man® / Hassay Savage

Keyseating Broaches

1/16 thru 1-1/2 inch sizes

2mm thru 25mm



Applications: **Hansford Davis Keyseating Machine Models 4, 5, and 15**


Type AF – Inch

Keyseating Broaches feature superior tooth design and are ground to precision keyway tolerances. Sizes for cutting the most common keyway widths are available.

TiN or TiAlN coatings available.

| Broach Size (inch) | Overall Length | Tooth Height | Tooth Pitch | EDP No. | | |
|--------------------|----------------|--------------|-------------|---------|---------------|-------|
| | | | | duMONT | Hassay Savage | |
| 1/16* | 16 | 3/8 | 3/8 | 55550 | 10701 | |
| 3/32* | | | | 55551 | 10702 | |
| 1/8* | | 7/16 | | 55552 | 10703 | |
| 5/32* | | 1/2 | | 55553 | 10704 | |
| 3/16 | | 9/16 | | 55554 | 10705 | |
| 1/4 | | 3/4 | 55555 | 10707 | | |
| 5/16 | | 20 | 7/8 | 17/32 | 55557 | 10709 |
| 3/8 | | | | 55559 | 10711 | |
| 7/16 | | | 1 | - | 10713 | |
| 3/16 | | | 3/8 | 3/8 | - | 10706 |
| 1/4 | 3/4 | | 55556 | 10708 | | |
| 5/16 | 7/8 | | 17/32 | 55558 | 10710 | |
| 3/8 | | | 55560 | 10712 | | |
| 7/16 | 1 | | 11/32 | 55561 | 10714 | |
| 1/2 | | | 17/32 | 55562 | 10715 | |
| 9/16 | | | | 55563 | 10716 | |
| 5/8 | | 55564 | | 10717 | | |
| 3/4 | | 55565 | | 10718 | | |
| 7/8 | | 55566 | | 10719 | | |
| 1 | | 55567 | | 10720 | | |

*Reinforced body width 3/16" thick

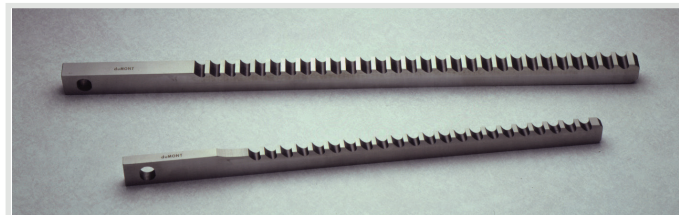

Type AF Metric Standard

| Broach Size (mm) | Overall Length | Tooth Height | Tooth Pitch | EDP No. | |
|------------------|----------------|--------------|-------------|---------|---------------|
| | | | | duMONT | Hassay Savage |
| 2* | 16 | 3/8 | 3/8 | 55570 | 11701 |
| 3* | | 7/16 | | 55571 | 11702 |
| 4* | | 1/2 | | 55572 | 11703 |
| 5 | | 9/16 | | 55573 | 11704 |
| 6 | | 3/4 | | 55574 | 11706 |
| 7 | | 7/8 | 17/32 | 55576 | - |
| 8 | | | | 55578 | 11708 |
| 9 | | | | 55580 | - |
| 10 | | | | - | 11710 |
| 5 | | | | 1/2 | 3/8 |
| 6 | 20 | 7/8 | 17/32 | 55575 | 11707 |
| 7 | | | | 55577 | - |
| 8 | | | | 55579 | 11709 |
| 9 | | | | 55581 | - |
| 10 | | | | 55582 | 11711 |
| 11 | | 1 | 17/32 | 55583 | - |
| 12 | | | | 55584 | 11712 |
| 13 | | | | 55585 | - |
| 14 | | | | 55586 | 11713 |
| 15 | | | | 55587 | - |
| 16 | 55588 | 11714 | | | |
| 17 | 55589 | - | | | |
| 18 | 55590 | 11715 | | | |
| 19 | 55591 | - | | | |
| 20 | 55592 | 11716 | | | |
| 22 | 55593 | 11717 | | | |
| 24 | 55594 | 11718 | | | |
| 25 | 55595 | 11719 | | | |

*Reinforced body width 3/16" thick

Type AFS – Inch

Staggered Tooth AFS Type Keyseating Broaches provide a stagger tooth design, promoting an efficient cut.

TiN or TiAlN coatings available.

| Broach Size (inch) | Overall Length | Tooth Height | EDP No. duMONT | |
|--------------------|----------------|--------------|----------------|-------|
| 3/8 | 20 | 1 | 55601 | |
| 7/16 | | | 55603 | |
| 1/2 | | | 55604 | |
| 9/16 | | | 55605 | |
| 5/8 | | | 55606 | |
| 3/4 | | | 55607 | |
| 7/8 | | | 55608 | |
| 1 | | | 55609 | |
| 1-1/8 | | | 1-1/8 | 55610 |
| 1-1/4 | | | 1-1/4 | 55611 |
| 1-1/2 | 1-1/2 | 55612 | | |

All standard items are available with TiN or TiAlN coating from stock or short delivery. Please contact Pilot Precision Products for details.

SPECIAL ORDERS: We are fully equipped to manufacture Special Keyseating Broaches not listed above. Please contact Pilot Precision Products for details.

duMONT Minute Man® / Hassay Savage

Arbor Presses and PressLube Broaching Oil

Hand Operated

Arbor Presses

duMONT Minute Man® Arbor Presses are easy to operate Manual Broaching Machines designed for Push Broaching with Keyways and Internal Hole Broaches. These Hand Operated Presses are available in 3- and 6-ton models and provide the pressure required to Push Broaches through the work piece. Both Arbor Presses provide these essential features:

- Ratchet operation with compound leverage for minimum operator effort.
- Pawl between lever and pinion permits positioning lever for most convenient reach and pull.
- Ram positioned by handwheel reduces travel, tests Broach alignment, supports the Broach and workpiece assembly.
- Round ram with rack teeth cut to center concentrates force along the center line to avoid cramping.



| | Dake 1 1/2 Arbor Press | Dake 1 1/2 B Arbor Press | Dake 2 1/2 Arbor Press |
|-----------------|------------------------|--------------------------|------------------------|
| EDP No. | 55004 | 55006 | 55008 |
| Stroke | 11-1/2 | 18-1/4 | 21-1/2 |
| Tonnage | 3 | 3 | 6 |
| Horsepower | Manual | Manual | Manual |
| Shipping Weight | 220 lbs. | 325 lbs. | 450 lbs. |

Broaching Oil That Keeps Your Tooling Sharp & Disposal Costs Down



Our PressLube™ Broaching Oil* is a proprietary formulation created to improve the performance of your broaching tools without the use of chlorine (Cl) and phosphorous (P). Our environmentally safe lubricant contains a special electrostatic precipitator (EP) additive that combines with active and inactive sulfurized lubricity agents to produce a high-performance broach cutting oil product.

| EDP # | Description |
|-------|--|
| 99960 | duMONT Broaching Oil 12 x 1 quart/case |
| 99961 | duMONT Broaching Oil 4 x 1 gallon/case |
| 99962 | duMONT Broaching Oil 5 gallon pail |
| 99963 | duMONT Broaching Oil 55 gallon drum |
| 99964 | duMONT Broaching Oil 275 gallon tote |

*California Proposition 65 - This product does not contain any substances known to the State of California to cause cancer and/or reproductive harm.

- Improves Part Quality, Surface Finish & Operational Efficiency
- Provides Excellent Rust Protection
- Extends Tool Life
- Minimizes Built-Up Edge
- Increases Rates of Turning
- Easy to Filter
- Environmentally Friendly
- Recyclable
- Reduces Disposal Costs




Custom Broaches

Push and Pull Types

Applications: **For high volume production pull-type machines**

Spline Broaches

Spline Broaches specifically designed and manufactured for your application, duMONT Minute Man® and Hassay Savage offer straight sided, Involute Spline, and Serration Broaches in both Push or Pull-type designs. Due to the complex nature of these tools a customer part print is required. Pull-type Broaches are available with a variety of pull ends—Threaded, Notched, Pin and Automatic, to name a few.

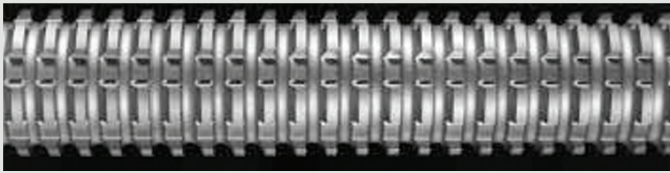



Keyway Broaches

duMONT Minute Man® and Hassay Savage manufacture Special Keyway Broaches in either Push or Pull-type in both American Standard and Metric Sizes. Special Application Multi-pass Push Keyway Broaches and One-Pass Keyway Broaches which require the appropriate guide Bushing can often be manufactured from an existing blank for quick delivery. One-Pass Push Keyway Broaches are also available in a self-guiding Production Style that require no guide Bushing. Both One-Pass Push-type styles as well as their Pull-type counterparts are available with a special chamfer feature that will deburr the keyway bore interface. Double-Keyway and Keyseating Broaches are also available. Pull-type Broaches are available with a variety of pull ends—Threaded, Notched, Pin, and Automatic, to name a few.



Firearms Custom Broaches

Our Breechface Broaches are easily assembled into a standard CNC holder. They are for use with the pistol brands: Glock, Smith & Wesson, H&K, Walther, CZ and Canik. Calibers include: 9mm, .40, .45, .380 and 10mm. Our Breechface broaches are internal to machine cycle and do not require subcontracting / offline operation. We also offer custom linear Push or Pull broaches made for all firearms broaching applications.



Custom Breechface Broaches for the Following Brands:

- Glock
- Smith & Wesson
- H&K
- Walther
- CZ
- Canik

Firearm Broaches we can support:

- Magwells
- Rifling
- Receiver
- Frame Broaches
- Slotters - Revolver
- Revolver Finishing

Custom Broaches and Re-Sharpener

Push and Pull Types

Applications: **Virtually any broaching operation** | **Short- and long-run production**

Surface Broaches

Surface Broaches are available as either individual Broaches or as inserts for broaching flat surfaces, irregular shapes, external forms, concave or convex surfaces, serrations, cam shapes, corner squaring and dovetails.



Internal Hole Broaches

Internal Hole Broaches in Push and Pull-type including Square, Hexagon, Round, Rectangular, Keyway, and irregularly shaped Broaches are all readily available. Broaches for Burnishing, Sizing and Combination or Cut and Finish applications are also manufactured as either Push or Pull-type. Pull-type Broaches are available with a variety of pull ends—Threaded, Notched, Pin and Automatic, to name a few.



Let Us Meet Your Custom Broach Requirements

Along with the extensive assortment of Stock Broaches listed in this catalog, we offer short delivery of Special Broaches custom-designed for your application or manufactured from your prints.

Our engineering staff has years of experience designing Special Broaches to replace time-consuming and costly machining operations. Whenever possible, we will meet your Special Broach requirements by using our extensive supply of hardened blank stock, thereby reducing both the cost and delivery time ordinarily associated with ordering Specials. With our extensive stock and expertise in designing and manufacturing specials, we are able to serve our customers as a single complete source for all of their broaching needs.

We are fully equipped to manufacture both Standard and Custom Broaches in either Push or Pull Styles, including all types of Keyway, Internal Hole, and Surface Broaches.

TiN or TiAlN coatings available.

Broach Re-Sharpener


Broaches, regardless of type, should never be used when dull. The use of a dull Broach may result in poor finish or cause drifting, damage to the teeth or breakage. Correct and timely re-sharpening will increase Broach life and quality of parts. The necessity to sharpen a Broach is dependent on numerous factors; material, tolerance, and required finish, etc. A number of conditions indicate the need for sharpening:

- Poor finish, tears, galling, etc. on the workpiece.
- Cutting edges showing signs of rollover and teeth dull to the touch.
- When using a Hydraulic Press, the pressure gauge showing an increase in pressure required to complete the cut.
- Nicks, gouges, etc. in the teeth from improper handling.
- Broach sticking in the workpiece, pick-up on tops of teeth.
- Holes gauging undersize.

duMONT Minute Man® and Hassay Savage offer expert Broach re-sharpening services, with the goal to restore the cutting edges of the Broach to its original condition. Broaches returned for this service are each individually examined and specific regrind instructions are generated for the reconditioning of the tool.

Standard Broaching Procedures

duMONT Minute Man® and Hassay Savage Broaches are designed for fast, accurate, and convenient broaching with arbor or hydraulic presses. A study of the Broaching Procedures presented in this section will familiarize the operator with proper broaching procedures and troubleshooting practices. Following proper broaching fundamentals, paying attention to technique and Broach maintenance will help prevent drifting, deflection and even breakage while providing greater efficiencies in the cutting of your parts. If you have a specific question or problem, contact our Engineering Department at 413-350-5200 or by email at info@pilotprecision.com.

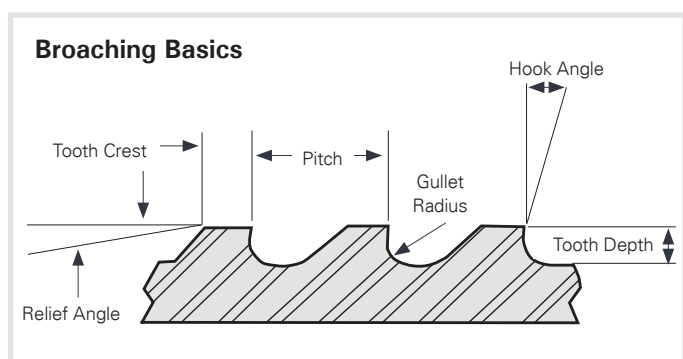

Warning Information

Cutting tools may shatter or break, therefore **eye protection should be worn wherever and whenever cutting tools are being used**. Government Regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of cutting tool use.

Workpiece Material

duMONT Minute Man® and Hassay Savage stock Broaches can be used on a variety of workpiece materials. It is not practical to Broach material having a Rockwell hardness higher than Rc35. When broaching **Iron** or **Steel**, use the standard Broach as supplied. **Brass** and **Free Machining Bronze** may require stoning of a slight land on the top of the teeth to prevent drifting (pulling into the work). Custom Broaches are designed and engineered to provide the correct tooth form, pitch and rake angles for the material specified.

Length of Cut

Our Broaches are designed to be used in operations where a minimum of two teeth are engaged at all times. Tooth engagement is required to maintain a smooth cutting action promoting a clean finish. The chip generated during the cutting process must be contained within the gullet of the tooth to avoid binding of the tool. This could cause potential damage to the Broach, the workpiece and injury to the operator. Appropriate

chip load allows for smooth cutting, and improved tool life. All individual stock Broaches have recommended Minimum and Maximum Length of Cut guidelines which should be followed. The required force necessary to achieve the Maximum Length of Cut is also provided with the individual Broach specifications. Workpieces may be stacked to establish the Minimum Length of Cut, or to improve the efficiencies of the operation as long as Maximum Length of Cut is not exceeded. Proper nesting and clamping of stacked parts is vital when this approach is taken. The Maximum Length of Cut with Push-type Keyway Broaches should not exceed the length of the Bushing being used.

Reminder: "A/I" Style Broaches are used with "A/I" Style Bushings, "B/II" Style Broaches with "B/II" Style Bushings, etc. Pilot Precision Products Push-type and Pull-type Broaches often can be designed to accommodate your specific length of cut requirements.

Set-Up and Alignment

Successful broaching begins with proper set-up, and alignment of the Broach, workpiece and ram. Attention to these details will provide a stable workpiece, and prevent drifting, deflection or even breakage caused by misalignment. The workpiece must be solidly fixed or nested perfectly square with the baseplate and ram face. Make sure all square and parallel surfaces on the face of the ram and baseplate remain true. It is essential to maintain a rigid set-up at all times and caution should be taken when stacking parts to maintain the integrity of the set-up. Never attempt to exceed the Broach's specified Maximum Length of Cut. At the beginning of a cut, be sure the Broach is centered under the ram. Proper alignment is important. After the Broach starts to cut, back off pressure on the ram to allow the Broach to center itself, if not in perfect alignment. If Broach moves out of alignment after starting cut, back off the pressure on the ram and align the broach itself. Repeat this procedure during successive cuts. This will assure a perfectly straight broached hole.

Suggestions for a drifting or "hogging" Push-type Keyway Broach:

1. Reverse workpiece or turn Broach so teeth face toward the back of the press.
2. Let the Bushing protrude above the workpiece to give more support to the back of the Broach, thereby helping to keep it aligned. If a collared Bushing is used, place it upside down under the workpiece.


Ram Adapter Use

Ram Adapters are used for broaching applications that require Round, Custom Shapes such as Rectangular as well as Square, and Hexagon Broaches 1/4" and 6mm or smaller. A Ram Adapter would also be recommended in situations where an extraordinary high degree of accuracy is required.

Engineering Section

How to Use Broaches

Applications: **Standard Push Broaching Procedures** | **Broach Re-Sharpening**

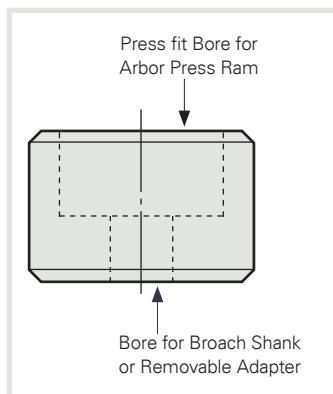

These Adapters are also referred to as rear guides and provide support and guidance for the Broach at the shank end, minimizing the possibility of deflection or breakage. When an Adapter is used as a rear guide for the Broach, the hole in the Ram Adapter must be in alignment with the pilot hole in the workpiece. It is important a Ram Adapter provides a tight, true fit to both the press ram and to the Broach shank. An adapter may also be used to allow the shanks of smaller Internal Hole Broaches to be gripped to avoid deflection and breakage.

Cutting Fluids and Lubrication

Broach lubrication is crucial to tool life and the quality of the finish produced. Lubrication enables chips to slide freely and curl in the tooth gullets minimizing frictional heat. This cuts down on Broach wear and prevents build up on the cutting edge of the teeth. Push-type Keyway Broaches, regardless of the material to be broached, require lubrication on the back side of the Broach in order to reduce friction. Proper lubrication will increase Broach life and produce a cleaner finish. Various materials require different lubricants.

Mild Steel – A good quality cutting oil is preferred but water-soluble coolant is ok. Apply on the teeth and back side of the broach.

Tough Steels such as Nickel Alloys – A good grade of a sulfur-based cutting oil.

Brass – Can be broached dry, but Oil is preferred.

Bronze – Works best with oil.

Cast Iron – Is almost always broached dry.

Aluminum – A good quality cutting oil is preferred but water-soluble coolant is OK. Apply on the teeth and back side of the broach.

Coatings Available

duMONT Minute Man® and Hassay Savage Broaches are available with TiN, and TiAlN coatings. The coatings provide enhanced performance for specific applications, delivering greater value and tool life on your more challenging materials.

TiN – provides increased lubricity and wear resistance when broaching abrasive materials such as fiberglass and some aluminum alloys.

TiAlN – offers significant increase in surface hardness (Rc low 90s). Applications would include broaching in most stainless steels, alloy steels and harder materials.

Broaching with Keyway Sets or Individual Broaches



Use of Individual Push-type Keyway Broaches or Keyway Broaches from a Broach Set requires the use of a Bushing and Shim(s). The Bushing size and style are determined by the bore diameter of the workpiece as well as the Style of Broach to be used. "A / I" Style Broaches are used with "A / I" Style Bushings, "B / II" style Broaches with "B / II" Style Bushings, etc. The smallest Broaches cut in one pass and require no Shim. Multiple pass Keyway Broaches

are furnished with all necessary Shim(s) unless otherwise noted. A Shim is required to compensate for the thickness removed following a Keyway Broach's cutting pass. The addition of a Shim to the bottom of the bushing's slot serves to move the Broach forward toward its standard finished cutting depth. Subsequent passes require the stacking of Shims.

1. Select the right Broach for the bore (sizes are plainly marked).
2. Insert Broach (which is also plainly marked for size) and check alignment.
3. Place this assembly in the press.
4. Lubricate.
5. Apply pressure to the Broach—back off pressure on Ram to allow the Broach to center itself if not in perfect alignment—reapply pressure to push Broach through the work.
6. Clean Broach using a stiff brush to remove chips from cutting section.
7. Insert shim and repeat steps 3 through 6 as required to obtain exact keyway depth.

*Find our Oil on Page 25



Engineering Section

How to Use Broaches

Applications: **Broaching with Keyway Sets and Production Keyway Broaches**

Broaching with One-Pass Keyway Broaches



Broaching with One-Pass Keyway Broaches requires the use of a Bushing. The Bushing size and Style are determined by the bore diameter of the workpiece as well as the Style of Broach to be used. "A/I" Style Broaches are used with "A/I" Style Bushings, "B/II" Style Broaches with "B/II" Style Bushings, etc. No Shims are required. The Broach cuts to full width and depth in one pass.

1. Select the right Bushing for the bore (sizes are plainly marked) and insert in the bore of work.
2. Insert Broach (which is also plainly marked for size) for the desired width of keyway into the Bushing slot and check alignment.
3. Place this assembly in the press.
4. Lubricate.
5. Apply pressure to the Broach—back off pressure on Ram to allow the Broach to center itself, if not in perfect alignment—reapply pressure to push Broach through the work.
6. Clean Broach using a stiff brush to remove chips from cutting section.
7. Repeat steps 2 thru 6 for subsequent parts.

Broaching with Production Keyway Broaches

Broaching with Production Style Keyway Broaches requires no Shims or Bushings. The back and shoulders of the Broach are ground to fit the diameter of the bore, supporting and guiding itself while cutting the keyway in one pass.

1. Select desired Broach and insert pilot into bore of part.
2. Lubricate.
3. Apply pressure to the Broach—back off pressure on Ram to allow the Broach to center itself, if not in perfect alignment.
4. Clean Broach using a stiff brush to remove chips from cutting section.
5. Repeat steps 2 through 4 for subsequent passes.

Broaching with Internal Hole Broaches



Broaching with Internal Hole Broaches requires no Shims or Bushings. Round, Square, Hexagon and many Custom Shapes are designed to finish in one pass, in cast or drilled bores requiring a thru hole finish. The starting hole must be drilled square with the face of the work. Square and Hexagon Broaches, 1/4" and 6mm or smaller, should be gripped by the shank in an adapter to prevent deflection and breakage.

1. Pilot Holes: Properly drilled pilot holes are essential for a true and clean cut. Never use a dull or poorly sharpened drill to make pilot holes.
2. Select desired Broach. Confirm the bore of workpiece is equal to pilot diameter of broach. (The use of a ram adapter is advised with all Round Broaches and for Square and Hexagon Broaches 1/4" and 6mm or smaller).
3. Insert pilot into bore of part.
4. Ram Speed: Always use proper ram speed to prevent chatter marks and edge wear. (See Metals Handbook – Vol. 3 "Machining".)
5. Lubricate.
6. Apply pressure to the Broach—back off pressure on Ram to allow the Broach to center itself, if not in perfect alignment—reapply pressure to push Broach through the work.
7. Clean Broach using a stiff brush to remove chips from cutting section.
8. Repeat steps 3 through 7 for subsequent parts.

Troubleshooting

We aim to make your broaching experience efficient, effective and trouble-free. Most broaching failures (poor finish, drifting, deflection, breakage, chatter marks or edge wear) can be attributed to deficiencies in alignment, lubrication, Broach sharpness, tooth configuration or design, material hardness and incorrect broaching speed or pressure as detailed in this section. If you have specific questions or problems not covered on these pages, contact our Engineering Department.

To the Distributor

duMONT Minute Man® and Hassay Savage broaches offer your customers the benefits of advanced design and the latest market technology in manufacturing. Our strict quality controls and skilled group of toolmakers ensure that Pilot Precision Products broaches cut more precisely, last longer and wear better to make money for you and your customers.

duMONT Minute Man® and Hassay Savage offer:

- Unsurpassed high-quality products made by experienced toolmakers
- Consistent product mix
- Excellent profit structure
- Timely service
- Pride in what we do
- Experienced craftsmanship



(Industrial Supply Association) we are organized by the ISA standard numbering system. Pilot Precision Products Code - 615948 (Uniform Code Council).

Warranty

Pilot Precision Products, warrants to original equipment manufacturers, distributors and industrial and commercial users of its products that each new product manufactured or supplied by Pilot Precision Products, shall be free from defects in material and workmanship. Pilot Precision Products, obligation under this warranty is limited to furnishing without additional charge a replacement or, at its option, repairing or issuing credit for any product which shall within one year from the date of sale be returned freight prepaid to the plant designated by Pilot Precision Products, representative and which upon inspection is determined by Pilot Precision Products, to be defective in materials or workmanship. Complete information as to operating conditions, machine setup, and application of cutting fluid should accompany any product returned for inspection. The provisions of this warranty shall not apply to any Pilot Precision Products Tools, product which has been subjected to misuse, improper operating conditions, machine setup or application of cutting fluid or

which has been repaired or altered if such repair or alteration in the judgment of Pilot Precision Products, would adversely affect performance of the product. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Pilot Precision Products, shall have no liability or responsibility on any claim of any kind, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein. IN NO EVENT SHALL Pilot Precision Products, BE LIABLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Pilot Precision Products, makes no other warranty, expressed or implied, except as set forth above; and Pilot Precision Products, neither assumes nor authorizes any other person or entity to assume for it any other obligation or liability in connection with any of its products.

Warning: *Cutting tools may shatter or break, therefore eye protection should be worn wherever and whenever cutting tools are being used. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of cutting tool use.*

duMONT CNC

Indexable Broaching System

PILLOT

Table of Contents

| | |
|--|--------------|
| duMONT CNC Broaching Kits | 34-35 |
| Stock Tool Holders for Keyway and Slotting Inserts (Inch) | 36 |
| Stock Tool Holders for Keyway and Slotting Inserts (Metric) | 37 |
| Broaching and Slotting Inserts (Inch) | 38 |
| Broaching and Slotting Inserts (Metric) | 39 |
| MAX HP Inserts | 40 |
| Tools for Splined Profiles | 41 |
| Tools and Inserts for Square | 42 |
| Tools and Inserts for Hexagon | 43 |
| Stock Eccentric Bushings | 44 |
| Stock Square Adaptors | 44 |
| Stock Centering Plates | 45 |
| Stock Sharpening Stems | 45 |
| Insert Mounting Screws and Torx Drivers | 46 |
| Stock Swivel Ball-Bearing Point Set Screws | 46 |
| System Components | 47 |
| Charging Handle for CNC Broaching Kit | 48 |
| AR Firearm CNC Broaching Kits | 49 |
| 1911 CNC Broaching Kit | 50 |
| <u>NEW</u> - Insertable Options for Breechfacing | 51 |
| Motorized Slotter | 52 |
| duMONT CNC Slotter DIY Kit | 53 |
| MH Slotting Series Insert Holder | 54 |
| MH Square Series Insert Holder | 55 |
| MH Hexagon Series Insert Holder | 56 |
| MH-Spline Series Insert Holder | 57 |
| MH-M Series Tool Holder Adaptor for the MINITOOL | 58 |
| MINITOOL | 58 |
| Index Broaching | 59 |
| Engineering | 60-61 |

duMONT CNC Indexable Broaching System

duMONT CNC Broaching Kits

Indexable Broaching Systems Combine Flexibility & Rigidity to Deliver Superior Performance

With generations of experience delivering American-crafted precision broaching tools, our passion for developing new technologies that solve problems gives our Indexable Broaching Systems the ability to improve productivity, quality and consistency in ways that stand the test of time.

Our CNC Broaching Kits are designed to conveniently give you a wide range of capabilities for your applications at a better value than buying individually.



| 632 Kit - 6 Piece Kit, 32mm Shank | |
|-----------------------------------|---|
| EDP # | Description |
| KIT-BC-632 | CNC Broach Concierge Kit with 6 Standard 32mm shank dia. Tools #5, 6, 8, 10, 12, 14/16 tool holders with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers |
| Includes | |
| 99036 | UT-5-32 32mm DIAMETER TOOL HOLDER |
| 99038 | UT-6-32 32mm DIAMETER TOOL HOLDER |
| 99040 | UT-8-32 32mm DIAMETER TOOL HOLDER |
| 99042 | UT-10-32 32mm DIAMETER TOOL HOLDER |
| 99044 | UT-12-32 32mm DIAMETER TOOL HOLDER |
| 99046 | UT-14/16-32 32mm DIAMETER TOOL HOLDER |
| 99207 | IN-3/16-H7 KEYWAY INSERT |
| 99209 | IN-1/4-H7 KEYWAY INSERT |
| 99212 | IN-5/16-H7 KEYWAY INSERT |
| 99213 | IN-3/8-H7 KEYWAY INSERT |
| 99215 | IN-1/2-H7 KEYWAY INSERT |
| 99216 | IN-5/8-H7 KEYWAY INSERT |
| 99561 | T8 TORX DRIVER |
| 99562 | T15 TORX DRIVER |
| 99563 | T20 TORX DRIVER |

| 632L Kit - 6 Piece Kit, 32mm Shank - Long | |
|---|---|
| EDP # | Description |
| KIT-BC-632L | CNC Broach Concierge Kit with 6 Long 32mm shank dia. Tools #5, 6, 8, 10, 12, 14/16 tool holders with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers |
| Includes | |
| 99037 | UT-5-32-L 32mm DIAMETER TOOL HOLDER |
| 99039 | UT-6-32-L 32mm DIAMETER TOOL HOLDER |
| 99041 | UT-8-32-L 32mm DIAMETER TOOL HOLDER |
| 99043 | UT-10-32-L 32mm DIAMETER TOOL HOLDER |
| 99045 | UT-12-32-L 32mm DIAMETER TOOL HOLDER |
| 99047 | UT-14/16-32-L 32mm DIAMETER TOOL HOLDER |
| 99207 | IN-3/16-H7 KEYWAY INSERT |
| 99209 | IN-1/4-H7 KEYWAY INSERT |
| 99212 | IN-5/16-H7 KEYWAY INSERT |
| 99213 | IN-3/8-H7 KEYWAY INSERT |
| 99215 | IN-1/2-H7 KEYWAY INSERT |
| 99216 | IN-5/8-H7 KEYWAY INSERT |
| 99561 | T8 TORX DRIVER |
| 99562 | T15 TORX DRIVER |
| 99563 | T20 TORX DRIVER |



duMONT CNC Indexable Broaching System

duMONT CNC Broaching Kits

| 725 Kit - 7 Piece Kit, 25mm Shank | |
|-----------------------------------|--|
| EDP # | Description |
| KIT-BC-725 | CNC Broach Concierge Kit with 7 Standard 25mm Shank Tool #2, 3, 4, 5, 6, 8, 10 tool holder with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers |
| Includes | |
| 99000 | UT-2-25 25mm DIAMETER TOOL HOLDER |
| 99002 | UT-3-25 25mm DIAMETER TOOL HOLDER |
| 99004 | UT-4-25 25mm DIAMETER TOOL HOLDER |
| 99006 | UT-5-25 25mm DIAMETER TOOL HOLDER |
| 99008 | UT-6-25 25mm DIAMETER TOOL HOLDER |
| 99010 | UT-8-25 25mm DIAMETER TOOL HOLDER |
| 99012 | UT-10-25 25mm DIAMETER TOOL HOLDER |
| 99202 | IN-3/32-H7 KEYWAY INSERT |
| 99203 | IN-1/8-H7 KEYWAY INSERT |
| 99206 | IN-5/32-H7 KEYWAY INSERT |
| 99207 | IN-3/16-H7 KEYWAY INSERT |
| 99209 | IN-1/4-H7 KEYWAY INSERT |
| 99212 | IN-5/16-H7 KEYWAY INSERT |
| 99213 | IN-3/8-H7 KEYWAY INSERT |
| 99561 | T8 TORX DRIVER |
| 99562 | T15 TORX DRIVER |
| 99563 | T20 TORX DRIVER |

| 725L Kit - 7 Piece Kit, 25mm Shank - Long | |
|---|--|
| EDP # | Description |
| KIT-BC-725L | CNC Broach Concierge Kit with 7 Long 25mm Shank Tool #2, 3, 4, 5, 6, 8, 10 tool holder with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers |
| Includes | |
| 99001 | UT-2-25-L 25mm DIAMETER TOOL HOLDER |
| 99003 | UT-3-25-L 25mm DIAMETER TOOL HOLDER |
| 99005 | UT-4-25-L 25mm DIAMETER TOOL HOLDER |
| 99007 | UT-5-25-L 25mm DIAMETER TOOL HOLDER |
| 99009 | UT-6-25-L 25mm DIAMETER TOOL HOLDER |
| 99011 | UT-8-25-L 25mm DIAMETER TOOL HOLDER |
| 99013 | UT-10-25-L 25mm DIAMETER TOOL HOLDER |
| 99202 | IN-3/32-H7 KEYWAY INSERT |
| 99203 | IN-1/8-H7 KEYWAY INSERT |
| 99206 | IN-5/32-H7 KEYWAY INSERT |
| 99207 | IN-3/16-H7 KEYWAY INSERT |
| 99209 | IN-1/4-H7 KEYWAY INSERT |
| 99212 | IN-5/16-H7 KEYWAY INSERT |
| 99213 | IN-3/8-H7 KEYWAY INSERT |
| 99561 | T8 TORX DRIVER |
| 99562 | T15 TORX DRIVER |
| 99563 | T20 TORX DRIVER |

| 6SQ25-32 Kits - 6 Piece Kit, 25mm or 32mm Shank - Square | | |
|--|---|---|
| EDP # | Description | |
| KIT-BC-6SQ25 or 32 | CNC Square Broach Concierge Kit with 6 tool holders in 25mm or 32mm Shank with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers | |
| Includes (25mm or 32mm): | | |
| 25mm | 32mm | |
| 99621 | 99622 | UT-SQ-8/10 SQUARE TOOL HOLDER SHANK |
| 99623 | 99624 | UT-SQ-10/13 SQUARE INSERT TOOL HOLDER SHANK |
| 99625 | 99626 | UT-SQ-13/16 SQUARE INSERT TOOL HOLDER SHANK |
| 99627 | 99628 | UT-SQ-16/19 SQUARE INSERT TOOL HOLDER SHANK |
| 99629 | 99630 | UT-SQ-19/27 SQUARE INSERT TOOL HOLDER SHANK |
| 99631 | 99632 | UT-SQ-27/37 SQUARE INSERT TOOL HOLDER SHANK |
| Inserts | | |
| 99601 | SQ-8/10 SQUARE INSERT | |
| 99602 | IN-SQ-10/13 SQUARE INSERT | |
| 99603 | IN-SQ-13/16 SQUARE INSERT | |
| 99604 | IN-SQ-16/19 SQUARE INSERT | |
| 99605 | IN-SQ-19/27 SQUARE INSERT | |
| 99606 | IN-SQ-27/37 SQUARE INSERT | |
| 99561 | T8 TORX DRIVER | |
| 99562 | T15 TORX DRIVER | |
| 99563 | T20 TORX DRIVER | |


| 6HX32 Kit - 6 Piece Kit, 32mm Shank - Hex | |
|---|--|
| EDP # | Description |
| KIT-BC-6HX32 | CNC Hex Broach Concierge Kit with 6 tool holders in 32mm Shank with 1 insert / each, in a metal rack & T8,T15,T20 Torx Drivers |
| Includes | |
| 99722 | UT-HEX-9/11-32 HEX TOOL HOLDER 32MM SHANK |
| 99724 | UT-HEX-11/17-32 HEX TOOL HOLDER 32MM SHANK |
| 99726 | UT-HEX-17/28-32 HEX TOOL HOLDER 32MM SHANK |
| 99728 | UT-HEX-28/37-32 HEX TOOL HOLDER 32MM SHANK |
| 99730 | UT-HEX-37/45-32 HEX TOOL HOLDER 32MM SHANK |
| 99731 | UT-HEX-45/70-32 HEX TOOL HOLDER 32MM SHANK |
| Inserts | |
| 99701 | IN-HEX-9/11 HEX INSERT |
| 99702 | IN-HEX-11/17 HEX INSERT |
| 99703 | IN-HEX-17/28 HEX INSERT |
| 99704 | IN-HEX-28/36 HEX INSERT |
| 99705 | IN-HEX-37/45 HEX INSERT |
| 99706 | IN-HEX-45/70 HEX INSERT |
| 99561 | T8 TORX DRIVER |
| 99562 | T15 TORX DRIVER |
| 99563 | T20 TORX DRIVER |
| 99563 | T20 TORX DRIVER |



duMONT CNC Indexable Broaching System

Stock Tool Holders for Keyway and Slotting Inserts (Inch)

The Tool Holders designed to work exclusively with duMONT Stock Keyway and Slotting Inserts are heat treated tool steel, hardened to 58/60 HRC at the Insert seat providing resistance to deformation and longer tool life. Most Tool Holders provide two 3.5mm holes for Thru Tool Coolant delivery promoting lubrication, cooling and chip flushing improving finish and tool performance. Available in 1 inch and 1.25 inch diameters in both Standard and Long Lengths designated by -S and -L respectively. Always confirm that the first digit in the Description of the Tool Holder Size matches the Tool Holder Size for the Insert to be used - i.e. Tool Holder Description 6-S for 1 inch shank diameter (EDP No. 99108) could be used with Inserts 1/4 inch (EDP No. 99209) or 6mm (EDP No. 99406). See the Engineering Section for additional process and Special Insert information and available applications — Keyways in Tapered Bore, Square, Hexagon and Involute Internal Gears.

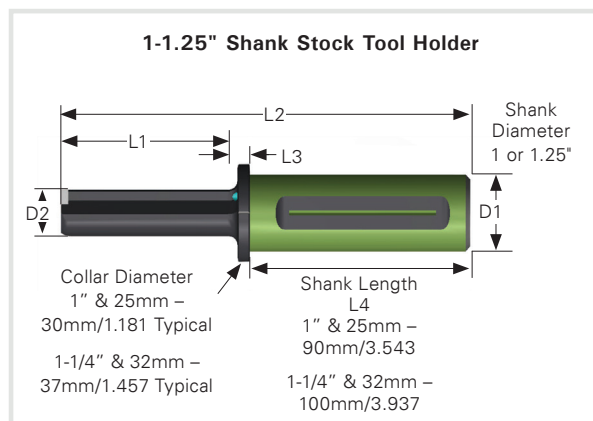

1 & 1.25 Inch Shank Stock Tool Holders for Keyway and Slotting Inserts

Description provides: Tool Holder Size — Length Designation Standard or Long.


See Pages 50-51 for Accessories.

NEW for 2022

| Tool Holder Accessories | | | | | | | | | | |
|-------------------------|--------------------------|------------------------------|--------------------------|-----------------------|-------------------------|----------------------------|-----------------|----------------|---------|-------------------|
| EDP - 1 in Shank D1 | "EDP - 1.25 in Shank D1" | Description Tool Holder Size | Minimum Bore Dia. (inch) | Stem Dia. (D2) (inch) | Stem Length (L1) (inch) | Overall Length (L2) (inch) | Centering Plate | Mounting Screw | Driver | Thru Tool Coolant |
| 99100 | 99130 | 2-S | .314 | .256 | .984 | 4.882 | CP-0 | MS-1 | T08 | Yes |
| 99101 | 99131 | 2-L | .314 | .256 | 1.378 | 5.276 | CP-0 | MS-1 | T08 | Yes |
| 99102 | 99132 | 3-S | .354 | .315 | 1.181 | 5.079 | CP-1 | MS-1 | T08 | Yes |
| 99103 | 99133 | 3-L | .354 | .315 | 1.575 | 5.472 | CP-1 | MS-1 | T08 | Yes |
| 99104 | 99134 | 4-S | .452 | .394 | 1.575 | 5.472 | CP-1 | MS-1 | T08 | Yes |
| 99105 | 99135 | 4-L | .452 | .394 | 2.205 | 6.102 | CP-1 | MS-1 | T08 | Yes |
| 99106 | 99136 | 5-S | .531 | .472 | 1.811 | 5.709 | CP-1 | MS-1 | T08 | Yes |
| 99107 | 99137 | 5-L | .531 | .472 | 2.598 | 6.496 | CP-1 | MS-1 | T08 | Yes |
| 99108 | 99138 | 6-S | .708 | .630 | 2.205 | 6.102 | CP-2 | MS-2 | T15 | Yes |
| 99109 | 99139 | 6-L | .708 | .630 | 3.189 | 7.087 | CP-2 | MS-2 | T15 | Yes |
| 99110 | 99140 | 8-S | .885 | .787 | 2.677 | 6.378 | CP-2 | MS-2 | T15 | Yes |
| 99111 | 99141 | 8-L | .885 | .787 | 3.937 | 7.825 | CP-2 | MS-2 | T15 | Yes |
| 99112 | 99142 | 10-S* | 1.102 | .984 | 3.386 | 7.284 | CP-3 | MS-3 | T20 | No |
| 99113 | 99143 | 10-L | 1.102 | .984 | 4.961 | 8.858 | CP-3 | MS-3 | T20 | No |
| 99114 | 99144 | 12-S* | 1.299 | 1.181 | 4.016 | 7.992 | CP-3 | MS-3 | T20 | No |
| 99115 | 99145 | 12-L | 1.299 | 1.181 | 6.339 | 10.236 | CP-3 | MS-3 | T20 | No |
| - | 99146 | 14/16-S | 1.574 | 1.378 | 4.961 | 9.094 | CP-4 | MS-3 | T20 | No |
| - | 99147 | 14/16-L | 1.574 | 1.378 | 7.087 | 11.220 | CP-4 | MS-3 | T20 | No |
| - | 99148 | 18/26-S* | 1.850 | 1.575 | 5.512 | 9.803 | CP-5 | MS-4 | 5mm-Hex | No |
| - | 99149 | 18/26-L* | 1.850 | 1.575 | 7.874 | 12.165 | CP-5 | MS-4 | 5mm-Hex | No |

*Collar Length .433 inch

Stock Tool Holders for Keyway and Slotting Inserts (mm)

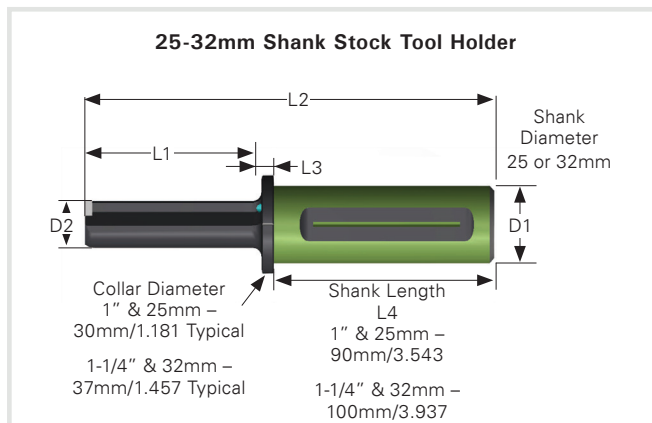

25 & 32mm Shank Stock Tool Holders for Keyway and Slotting Inserts

Description provides: Tool Holder Size — Length Designation Standard or Long.


See Pages 50-51 for Accessories.

| Tool Holder Accessories | | | | | | | | | | | |
|-------------------------|----------------------|------------------------------|------------------------|---------------------|-----------------------|--------------------------|-----------------|----------------|---------|-------------------|--|
| EDP - 25mm Shank D1" | EDP - 32mm Shank D1" | Description Tool Holder Size | Minimum Bore Dia. (mm) | Stem Dia. (D2) (mm) | Stem Length (L1) (mm) | Overall Length (L2) (mm) | Centering Plate | Mounting Screw | Driver | Thru Tool Coolant | |
| 99000 | 99030 | 2-S | 8 | 6.5 | 25 | 124 | CP-0 | MS-1 | T08 | Yes | |
| 99001 | 99031 | 2-L | 8 | 6.5 | 35 | 134 | CP-0 | MS-1 | T08 | Yes | |
| 99002 | 99032 | 3-S | 9 | 8 | 30 | 129 | CP-1 | MS-1 | T08 | Yes | |
| 99003 | 99033 | 3-L | 9 | 8 | 40 | 139 | CP-1 | MS-1 | T08 | Yes | |
| 99004 | 99034 | 4-S | 11.5 | 10 | 40 | 139 | CP-1 | MS-1 | T08 | Yes | |
| 99005 | 99035 | 4-L | 11.5 | 10 | 56 | 155 | CP-1 | MS-1 | T08 | Yes | |
| 99006 | 99036 | 5-S | 13.5 | 12 | 46 | 145 | CP-1 | MS-1 | T08 | Yes | |
| 99007 | 99037 | 5-L | 13.5 | 12 | 66 | 165 | CP-1 | MS-1 | T08 | Yes | |
| 99008 | 99038 | 6-S | 18 | 16 | 56 | 155 | CP-2 | MS-2 | T15 | Yes | |
| 99009 | 99039 | 6-L | 18 | 16 | 81 | 182 | CP-2 | MS-2 | T15 | Yes | |
| 99010 | 99040 | 8-S | 22.5 | 20 | 68 | 162 | CP-2 | MS-2 | T15 | Yes | |
| 99011 | 99041 | 8-L | 22.5 | 20 | 100 | 199 | CP-2 | MS-2 | T15 | Yes | |
| 99012 | 99042 | 10-S* | 28 | 25 | 86 | 185 | CP-3 | MS-3 | T20 | No | |
| 99013 | 99043 | 10-L | 28 | 25 | 126 | 225 | CP-3 | MS-3 | T20 | No | |
| 99014 | 99044 | 12-S* | 33 | 30 | 102 | 203 | CP-3 | MS-3 | T20 | No | |
| 99015 | 99045 | 12-L | 33 | 30 | 161 | 260 | CP-3 | MS-3 | T20 | No | |
| - | 99046 | 14/16-S | 40 | 35 | 126 | 231 | CP-4 | MS-3 | T20 | No | |
| - | 99047 | 14/16-L | 40 | 35 | 180 | 285 | CP-4 | MS-3 | T20 | No | |
| - | 99048 | 18/26-S* | 47 | 40 | 140 | 249 | CP-5 | MS-4 | 5mm-Hex | No | |
| - | 99049 | 18/26-L* | 47 | 40 | 200 | 309 | CP-5 | MS-4 | 5mm-Hex | No | |

*Collar Length 11mm

Tools for External Machining

The series of tools for external machining was developed for external surfaces (to execute splines and keyway seatings, among others). These tools are made with tool steel. In addition to the two types of tools for external machining available in the catalog, Pilot Precision Products is able to build special tools for external machining based on specific customer demands.

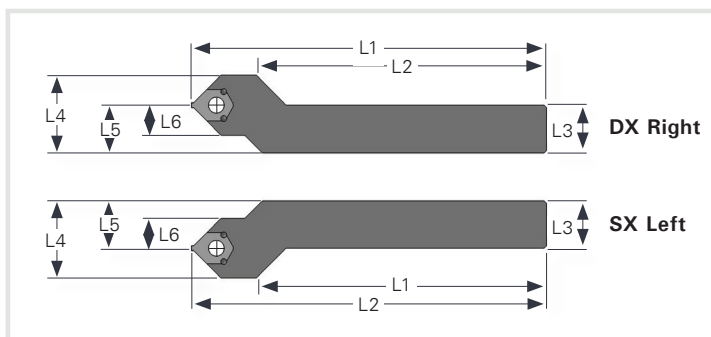


| Tools for External Machining (mm) | | | | | | | |
|-----------------------------------|-------------|---------|---------|---------|---------|---------|---------|
| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) |
| 99901 | 20-DX | 150.0 | 122.5 | 20x20 | 32.5 | 20 | 12.5 |
| 99902 | 20-SX | | | 20x20 | 32.5 | 20 | |
| 99903 | 25-DX | | | 25x25 | 37.5 | 25 | |
| 99904 | 25-SX | | | 25x25 | 37.5 | 25 | |

Use Insert L2 Pocket size 13mm or 0.5157" |

Ref: Toolholder Size 10 & 12

duMONT CNC Indexable Broaching System

Broaching and Slotting Inserts - Imperial

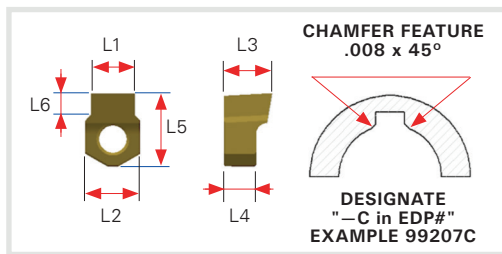

| Inserts (inch) - Tolerances | | | | | | | | | | | | | | | To order a different tolerance - EDP# + (TOLERANCE) = 99202P9 | |
|-----------------------------|-----------|----------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|-----------|-----------|-----------|-----------|---|--------------|
| EDP No. | L1 (Inch) | H-7 (Standard) | | P-9 | | D-10 | | C-11 | | L2 (Inch) | L3 (Inch) | L4 (Inch) | L5 (Inch) | L6 (Inch) | Tool Holder Size | Sharpen Stem |
| | | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | | | | | | | |
| 99202 | 3/32 | 0.09410 | 0.09370 | | | | | | | 0.1968 | 0.2362 | 0.1968 | 0.2559 | 0.0551 | 2 | SS-0 |
| 99202() | | | | 0.09360 | 0.09260 | 0.09610 | 0.09570 | 0.09850 | 0.09810 | | | | | 0.0551 | | |
| 99202C* | | 0.09410 | 0.09370 | | | | | | | | | | | 0.0520 | | |
| 99203 | 1/8 | 0.12550 | 0.12551 | | | | | | | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.0905 | 3 | SS-1 |
| 99203() | | | | 0.12460 | 0.12340 | 0.12810 | 0.12770 | 0.13070 | 0.13030 | | | | | 0.0905 | | |
| 99203C* | | 0.12550 | 0.12551 | | | | | | | | | | | 0.0740 | | |
| 99206 | 5/32 | 0.15670 | 0.15652 | | | | | | | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.1141 | 4 | SS-1 |
| 99206() | | | | 0.15590 | 0.15470 | 0.15930 | 0.15892 | 0.16200 | 0.16160 | | | | | 0.1141 | | |
| 99206C* | | 0.15670 | 0.15652 | | | | | | | | | | | 0.0790 | | |
| 99207 | 3/16 | 0.18800 | 0.18778 | | | | | | | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.1299 | 5 | SS-1 |
| 99207() | | | | 0.18710 | 0.18590 | 0.19060 | 0.19020 | 0.19320 | 0.19280 | | | | | 0.1299 | | |
| 99207C* | | 0.18800 | 0.18778 | | | | | | | | | | | 0.1050 | | |
| 99209 | 1/4 | 0.25080 | 0.25040 | | | | | | | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1587 | 6 | SS-2 |
| 99209() | | | | 0.24940 | 0.24800 | 0.25390 | 0.25350 | 0.25670 | 0.25630 | | | | | 0.1587 | | |
| 99209C* | | 0.25080 | 0.25040 | | | | | | | | | | | 0.1360 | | |
| 99210 | 9/32 | 0.28180 | 0.28160 | | | | | | | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1692 | 8 | SS-2 |
| 99210() | | | | 0.28060 | 0.27920 | 0.28510 | 0.28470 | 0.28790 | 0.28750 | | | | | 0.1692 | | |
| 99210C* | | 0.28180 | 0.28160 | | | | | | | | | | | 0.1520 | | |
| 99212 | 5/16 | 0.31310 | 0.31270 | | | | | | | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1875 | 8 | SS-2 |
| 99212() | | | | 0.31190 | 0.31050 | 0.31640 | 0.31600 | 0.31920 | 0.31880 | | | | | 0.1875 | | |
| 99212C* | | 0.31310 | 0.31270 | | | | | | | | | | | 0.1670 | | |
| 99213 | 3/8 | 0.37560 | 0.37520 | | | | | | | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.2500 | 10 | SS-3 |
| 99213() | | | | 0.37440 | 0.37300 | 0.37890 | 0.37850 | 0.38170 | 0.38130 | | | | | 0.2500 | | |
| 99213C* | | 0.37560 | 0.37520 | | | | | | | | | | | 0.1990 | | |
| 99214 | 7/16 | 0.43820 | 0.43780 | | | | | | | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.2500 | 12 | SS-4 |
| 99214() | | | | 0.43680 | 0.43510 | 0.44220 | 0.44180 | 0.44560 | 0.44520 | | | | | 0.2500 | | |
| 99214C* | | 0.43820 | 0.43780 | | | | | | | | | | | 0.2300 | | |
| 99215 | 1/2 | 0.50070 | 0.50030 | | | | | | | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.3000 | 12 | SS-4 |
| 99215() | | | | 0.49930 | 0.49760 | 0.50470 | 0.50430 | 0.50810 | 0.50760 | | | | | 0.3000 | | |
| 99215C* | | 0.50070 | 0.50030 | | | | | | | | | | | 0.2610 | | |
| 99242 | 9/16 | 0.56320 | 0.56280 | | | | | | | 0.7086 | 0.5511 | 0.3937 | 0.8661 | 0.2750 | 14/16 | SS-4 |
| 99242() | | | | 0.56180 | 0.56010 | 0.56720 | 0.56680 | 0.57060 | 0.57020 | | | | | 0.2750 | | |
| 99242C* | | 0.56320 | 0.56280 | | | | | | | | | | | 0.2670 | | |
| 99216 | 5/8 | 0.62570 | 0.62530 | | | | | | | 0.7086 | 0.5511 | 0.3937 | 0.8661 | 0.3120 | 14/16 | SS-4 |
| 99216() | | | | 0.62430 | 0.62240 | 0.62970 | 0.62930 | 0.63310 | 0.63270 | | | | | 0.3120 | | |
| 99216C* | | 0.62570 | 0.62530 | | | | | | | | | | | 0.3024 | | |
| 99217 | 3/4 | 0.75080 | 0.75040 | | | | | | | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.3930 | 18/26 | SS-5 |
| 99217() | | | | 0.74910 | 0.74710 | 0.75590 | 0.75550 | 0.75940 | 0.75900 | | | | | 0.3930 | | |
| 99217C* | | 0.75080 | 0.75040 | | | | | | | | | | | 0.3860 | | |
| 99218 | 7/8 | 0.87579 | 0.87559 | | | | | | | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.4330 | 18/26 | SS-5 |
| 99218() | | | | 0.8743 | 0.8738 | 0.88090 | 0.88050 | 0.88450 | 0.88410 | | | | | 0.4330 | | |
| 99218C* | | 0.87579 | 0.87559 | | | | | | | | | | | 0.4030 | | |
| 99219 | 1 | 1.00150 | 1.00250 | | | | | | | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.5410 | 18/26 | SS-5 |
| 99219() | | | | 0.9993 | 0.9988 | 1.00590 | 1.00550 | 1.00960 | 1.00910 | | | | | 0.5410 | | |
| 99219C* | | 1.00150 | 1.00250 | | | | | | | | | | | 0.4270 | | |


*Chamfer feature providing a 45° Chamfer at the intersection of the bore and the walls of the broached section when cut to full depth is available by specifying a "C" in the EDP No. for example --- 99408-C.

**It is necessary on larger cuts 12mm or ½ inch keyways and above to cut in two operations, a roughing pass with a smaller width insert (approximate ½ required width) and finishing pass at the desired width. This approach reduces the pressure required.



duMONT CNC Indexable Broaching System

Broaching and Slotting Inserts - Metric

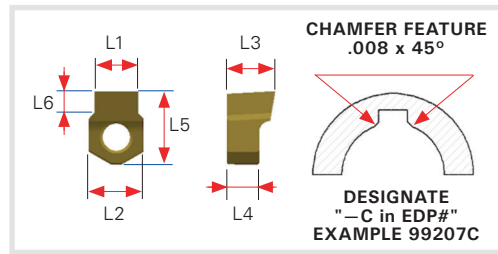

Inserts (mm) - Tolerances To order a different tolerance - EDP# + (TOLERANCE) = 99202P9

| EDP No. | L1 (mm) | H-7 (Standard) | | P-9 | | D-10 | | C-11 | | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | Tool Holder Size | Sharpen Stem |
|---------|---------|----------------|----------|-----------|----------|-----------|----------|-----------|----------|---------|---------|---------|---------|---------|------------------|--------------|
| | | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | L1 (High) | L1 (Low) | | | | | | | |
| 99401 | 2 | 0.07910 | 0.07810 | | | | | | | 5.00 | 6.50 | 5.00 | 6.00 | 1.30 | 2 | SS-0 |
| 99401() | | | | 0.07850 | 0.07750 | 0.08540 | 0.08110 | 0.08350 | 0.08300 | | | | | 1.30 | | |
| 99401C* | | 0.07910 | 0.07810 | | | | | | | | | | | 1.09 | | |
| 99402 | 3 | 0.11860 | 0.11830 | | | | | | | 6.08 | 6.50 | 5.00 | 7.50 | 2.00 | 3 | SS-1 |
| 99402() | | | | 0.11790 | 0.11690 | 0.12090 | 0.12047 | 0.12280 | 0.12244 | | | | | 2.00 | | |
| 99402C* | | 0.11860 | 0.11830 | | | | | | | | | | | 1.42 | | |
| 99403 | 4 | 0.15800 | 0.15767 | | | | | | | 6.08 | 7.00 | 5.00 | 8.00 | 2.60 | 4 | SS-1 |
| 99403() | | | | 0.15710 | 0.15590 | 0.16020 | 0.15984 | 0.16220 | 0.16180 | | | | | 2.60 | | |
| 99403C* | | 0.15800 | 0.15767 | | | | | | | | | | | 2.07 | | |
| 99404 | 5 | 0.19730 | 0.19705 | | | | | | | 6.08 | 7.00 | 5.00 | 8.00 | 3.00 | 5 | SS-1 |
| 99404() | | | | 0.19650 | 0.19530 | 0.19960 | 0.19920 | 0.20160 | 0.20118 | | | | | 3.00 | | |
| 99404C* | | 0.19730 | 0.19705 | | | | | | | | | | | 2.74 | | |
| 99406 | 6 | 0.23680 | 0.23650 | | | | | | | 10.08 | 9.00 | 6.00 | 13.50 | 4.00 | 6 | SS-2 |
| 99406() | | | | 0.23560 | 0.23420 | 0.23940 | 0.23897 | 0.24090 | 0.24055 | | | | | 4.00 | | |
| 99406C* | | 0.23680 | 0.23650 | | | | | | | | | | | 3.00 | | |
| 99407 | 8 | 0.31560 | 0.31527 | | | | | | | 10.08 | 9.00 | 6.00 | 13.50 | 4.50 | 8 | SS-2 |
| 99407() | | | | 0.31440 | 0.31300 | 0.31810 | 0.31770 | 0.32050 | 0.32010 | | | | | 4.50 | | |
| 99407C* | | 0.31560 | 0.31527 | | | | | | | | | | | 3.78 | | |
| 99408 | 10 | 0.39430 | 0.39410 | | | | | | | 13.10 | 14.00 | 10.00 | 18.50 | 6.00 | 10 | SS-3 |
| 99408() | | | | 0.39300 | 0.39130 | 0.39720 | 0.39680 | 0.40000 | 0.39960 | | | | | 6.00 | | |
| 99408C* | | 0.39430 | 0.39410 | | | | | | | | | | | 3.88 | | |
| 99409 | 12 | 0.47310 | 0.47280 | | | | | | | 13.10 | 14.00 | 10.00 | 18.50 | 6.50 | 12 | SS-3 |
| 99409() | | | | 0.47170 | 0.47000 | 0.47600 | 0.47560 | 0.47950 | 0.47910 | | | | | 6.50 | | |
| 99409C* | | 0.47310 | 0.47280 | | | | | | | | | | | 3.89 | | |
| 99410 | 14 | 0.55190 | 0.55157 | | | | | | | 18.00 | 14.00 | 10.00 | 22.00 | 7.00 | 14/16 | SS-4 |
| 99410() | | | | 0.55050 | 0.54880 | 0.55510 | 0.55472 | 0.55910 | 0.55860 | | | | | 7.00 | | |
| 99410C* | | 0.55190 | 0.55157 | | | | | | | | | | | 4.71 | | |
| 99411 | 16 | 0.63060 | 0.63030 | | | | | | | 18.00 | 14.00 | 10.00 | 22.00 | 8.00 | 14/16 | SS-4 |
| 99411() | | | | 0.62920 | 0.62750 | 0.63390 | 0.63346 | 0.63780 | 0.63740 | | | | | 8.00 | | |
| 99411C* | | 0.63060 | 0.63030 | | | | | | | | | | | 5.53 | | |
| 99412 | 18 | 0.70950 | 0.70905 | | | | | | | 26.00 | 18.00 | 10.00 | 30.00 | 9.00 | 18/26 | SS-5 |
| 99412() | | | | 0.70780 | 0.70580 | 0.71450 | 0.71413 | 0.71810 | 0.71770 | | | | | 9.00 | | |
| 99412C* | | 0.70950 | 0.70905 | | | | | | | | | | | 5.67 | | |
| 99413 | 20 | 0.78820 | 0.78780 | | | | | | | 26.00 | 18.00 | 10.00 | 30.00 | 10.00 | 18/26 | SS-5 |
| 99413() | | | | 0.78650 | 0.78450 | 0.79330 | 0.79287 | 0.79690 | 0.79645 | | | | | 10.00 | | |
| 99413C* | | 0.78820 | 0.78780 | | | | | | | | | | | 6.29 | | |
| 99414 | 22 | 0.86700 | 0.86650 | | | | | | | 26.00 | 18.00 | 10.00 | 30.00 | 11.00 | 18/26 | SS-5 |
| 99414() | | | | 0.86520 | 0.86320 | 0.87200 | 0.87160 | 0.87560 | 0.87519 | | | | | 11.00 | | |
| 99414C* | | 0.86700 | 0.86650 | | | | | | | | | | | 6.79 | | |
| 99494 | 25 | 0.98510 | 0.98464 | | | | | | | 26.00 | 18.00 | 10.00 | 30.00 | 12.00 | 18/26 | SS-5 |
| 99494() | | | | 0.98340 | 0.98140 | 0.99010 | 0.98970 | 0.99370 | 0.99330 | | | | | 12.00 | | |
| 99494C* | | 0.98510 | 0.98464 | | | | | | | | | | | 7.02 | | |

*Chamfer feature providing a 45° Chamfer at the intersection of the bore and the walls of the broached section when cut to full depth is available by specifying a "C" in the EDP No. for example --- 99402-C.



The Inserts designed to work exclusively with duMONT Tool Holders are a sintered steel alloy with a 13% cobalt content, heat treated to a 72 HRC hardness providing toughness and impact resistance. A TiN coating is applied to improve wear resistance and lubricity. All Inserts are designed to allow several re-sharpenings. Stock Insert specifications and mild steel application data are provided. A Chamfer Feature is available (see footnote*). See the Engineering Section for process and Special Insert information and available applications — Keyways in Tapered Bore, Square, Hexagon and Involute Internal Gears. We can add custom corner radius per your requirement, allow up to 2 weeks for modification and recoating.

**It is necessary on larger cuts 12mm or ½ inch keyways and above to cut in two operations, a roughing pass with a smaller width insert (approximate ½ required width) and finishing pass at the desired width. This approach reduces the pressure required.

duMONT CNC Indexable Broaching System

MAX HP Inserts

The MAX HP Inserts are optimal for use in stainless, super alloys, and hardened steel applications. Higher rake angle; TiAlN coated

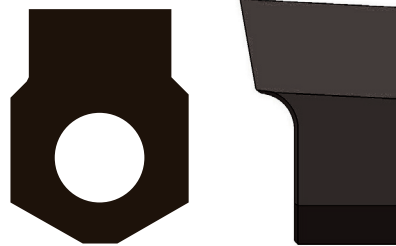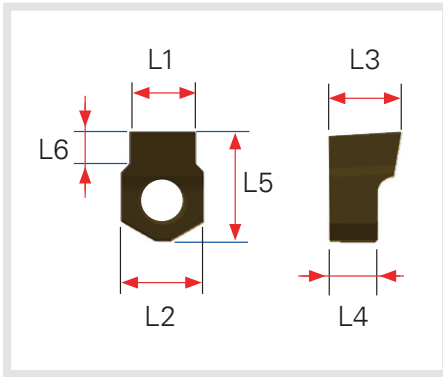

New for 2022
Designed for Hi-Temp, Stainless & Hardened Steel Alloys

Inserts (inch) - Tolerances

| EDP No. | L1 (Inch) | H-7 (Standard) | | L2 (Inch) | L3 (Inch) | L4 (Inch) | L5 (Inch) | L6 (Inch) | Tool Holder Size | Sharpen Stem |
|---------|-----------|----------------|----------|-----------|-----------|-----------|-----------|-----------|------------------|--------------|
| | | L1 (High) | L1 (Low) | | | | | | | |
| 99202-M | 3/32 | 0.09410 | 0.09370 | 0.1968 | 0.2362 | 0.1968 | 0.2559 | 0.0551 | 2 | SS-0 |
| 99203-M | 1/8 | 0.12550 | 0.12551 | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.0905 | 3 | SS-1 |
| 99206-M | 5/32 | 0.15670 | 0.15652 | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.1141 | 4 | SS-1 |
| 99207-M | 3/16 | 0.18800 | 0.18778 | 0.2362 | 0.2755 | 0.1968 | 0.3149 | 0.1299 | 5 | SS-1 |
| 99209-M | 1/4 | 0.25080 | 0.25040 | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1587 | 6 | SS-2 |
| 99210-M | 9/32 | 0.28180 | 0.28160 | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1692 | 8 | SS-2 |
| 99212-M | 5/16 | 0.31310 | 0.31270 | 0.3968 | 0.3543 | 0.2362 | 0.5314 | 0.1875 | 8 | SS-2 |
| 99213-M | 3/8 | 0.37560 | 0.37520 | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.2500 | 10 | SS-3 |
| 99214-M | 7/16 | 0.43820 | 0.43780 | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.2500 | 12 | SS-4 |
| 99215-M | 1/2 | 0.50070 | 0.50030 | 0.5157 | 0.5511 | 0.3937 | 0.7283 | 0.3000 | 12 | SS-4 |
| 99242-M | 9/16 | 0.56320 | 0.56280 | 0.7086 | 0.5511 | 0.3937 | 0.8661 | 0.2750 | 14/16 | SS-4 |
| 99216-M | 5/8 | 0.62570 | 0.62530 | 0.7086 | 0.5511 | 0.3937 | 0.8661 | 0.3120 | 14/16 | SS-4 |
| 99217-M | 3/4 | 0.75080 | 0.75040 | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.3930 | 18/26 | SS-5 |
| 99218-M | 7/8 | 0.87579 | 0.87559 | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.4330 | 18/26 | SS-5 |
| 99219-M | 1 | 1.00150 | 1.00250 | 1.0236 | 0.7086 | 0.3937 | 1.1811 | 0.5410 | 18/26 | SS-5 |

Inserts (mm) - Tolerances




| EDP No. | L1 (mm) | H-7 (Standard) | | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | Tool Holder Size | Sharpen Stem |
|---------|---------|----------------|----------|---------|---------|---------|---------|---------|------------------|--------------|
| | | L1 (High) | L1 (Low) | | | | | | | |
| 99401-M | 2 | 0.07910 | 0.07810 | 5.00 | 6.50 | 5.00 | 6.00 | 1.30 | 2 | SS-0 |
| 99402-M | 3 | 0.11860 | 0.11830 | 6.08 | 6.50 | 5.00 | 7.50 | 2.00 | 3 | SS-1 |
| 99403-M | 4 | 0.15800 | 0.15767 | 6.08 | 7.00 | 5.00 | 8.00 | 2.60 | 4 | SS-1 |
| 99404-M | 5 | 0.19730 | 0.19705 | 6.08 | 7.00 | 5.00 | 8.00 | 3.00 | 5 | SS-1 |
| 99406-M | 6 | 0.23680 | 0.23650 | 10.08 | 9.00 | 6.00 | 13.50 | 4.00 | 6 | SS-2 |
| 99407-M | 8 | 0.31560 | 0.31527 | 10.08 | 9.00 | 6.00 | 13.50 | 4.50 | 8 | SS-2 |
| 99408-M | 10 | 0.39430 | 0.39410 | 13.10 | 14.00 | 10.00 | 18.50 | 6.00 | 10 | SS-3 |
| 99409-M | 12 | 0.47310 | 0.47280 | 13.10 | 14.00 | 10.00 | 18.50 | 6.50 | 12 | SS-3 |
| 99410-M | 14 | 0.55190 | 0.55157 | 18.00 | 14.00 | 10.00 | 22.00 | 7.00 | 14/16 | SS-4 |
| 99411-M | 16 | 0.63060 | 0.63030 | 18.00 | 14.00 | 10.00 | 22.00 | 8.00 | 14/16 | SS-4 |
| 99412-M | 18 | 0.70950 | 0.70905 | 26.00 | 18.00 | 10.00 | 30.00 | 9.00 | 18/26 | SS-5 |
| 99413-M | 20 | 0.78820 | 0.78780 | 26.00 | 18.00 | 10.00 | 30.00 | 10.00 | 18/26 | SS-5 |
| 99414-M | 22 | 0.86700 | 0.86650 | 26.00 | 18.00 | 10.00 | 30.00 | 11.00 | 18/26 | SS-5 |
| 99494-M | 25 | 0.98510 | 0.98464 | 26.00 | 18.00 | 10.00 | 30.00 | 12.00 | 18/26 | SS-5 |

**It is necessary on larger cuts 12mm or ½ inch keyways and above to cut in two operations, a roughing pass with a smaller width insert (approximate ½ required width) and finishing pass at the desired width. This approach reduces the pressure required.



Tools for Splined Profiles

The SP tool line was designed to make splined internal profiles. The choice of tool is determined by the minimum entry hole of the workpiece to be machined. In fact, we recommend purchasing a tool with a diameter (D2) as close to the value of said hole as possible, as shown in the table. It is also possible to make special tools in various diameters and sizes based on specific customer needs.

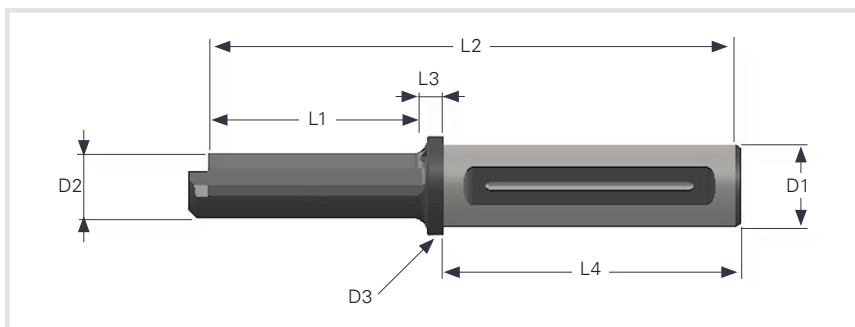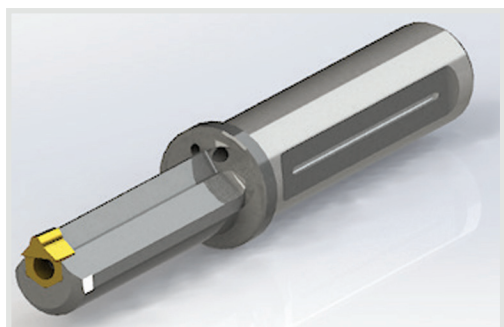

| Tools for Splined Profiles (mm) | | | | | | | | | | | | | |
|---------------------------------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | D1 (mm) | D2 (mm) | D3 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
| 99801 | 02-25 | 25.0 | 124.0 | 9.0 | 90.0 | 25.0 | 6.5 | 30.0 | CP-0 | T08 | MS-1 | 7.0 | 382 |
| 99802 | 02-32 | 25.0 | 134.0 | | 100.0 | 32.0 | 6.5 | 37.0 | CP-0 | T08 | MS-1 | 7.0 | 600 |
| 99803 | 03-25 | 30.0 | 129.0 | | 90.0 | 25.0 | 8.0 | 30.0 | CP-1 | T08 | MS-1 | 8.5 | 368 |
| 99804 | 03-32 | 30.0 | 139.0 | | 100.0 | 32.0 | 8.0 | 37.0 | CP-1 | T08 | MS-1 | 8.5 | 673 |
| 99805 | 04-25 | 40.0 | 139.0 | | 90.0 | 25.0 | 10.0 | 30.0 | CP-1 | T08 | MS-1 | 10.5 | 368 |
| 99806 | 04-32 | 40.0 | 149.0 | | 100.0 | 32.0 | 10.0 | 37.0 | CP-1 | T08 | MS-1 | 10.5 | 672 |
| 99807 | 05-25 | 46.0 | 145.0 | | 90.0 | 25.0 | 12.0 | 30.0 | CP-1 | T08 | MS-1 | 12.5 | 382 |
| 99808 | 05-32 | 46.0 | 155.0 | | 100.0 | 32.0 | 12.0 | 37.0 | CP-1 | T08 | MS-1 | 12.5 | 698 |
| 99809 | 06-25 | 56.0 | 155.0 | 11 | 90.0 | 25.0 | 16.0 | 30.0 | CP-2 | T15 | MS-2 | 16.5 | 428 |
| 99810 | 06-32 | 56.0 | 165.0 | | 100.0 | 32.0 | 16.0 | 37.0 | CP-2 | T15 | MS-2 | 16.5 | 725 |
| 99811 | 08-25 | 68.0 | 167.0 | | 90.0 | 25.0 | 20.0 | 30.0 | CP-2 | T15 | MS-2 | 21.0 | 488 |
| 99812 | 08-32 | 68.0 | 177.0 | | 100.0 | 32.0 | 20.0 | 37.0 | CP-2 | T15 | MS-2 | 21.0 | 820 |
| 99813 | 10-25 | 86.0 | 185.0 | 9.0 | 90.0 | 25.0 | 25.0 | 32.0 | CP-3 | T20 | MS-3 | 28.0 | 647 |
| 99814 | 10-32 | 86.0 | 195.0 | | 100.0 | 32.0 | 25.0 | 37.0 | CP-3 | T20 | MS-3 | 28.0 | 935 |
| 99815 | 12-25 | 102.0 | 203.0 | 9.0 | 90.0 | 25.0 | 30.0 | 35.0 | CP-3 | T20 | MS-3 | 33.0 | 824 |
| 99816 | 12-32 | 102.0 | 213.0 | | 100.0 | 32.0 | 30.0 | 37.0 | CP-3 | T20 | MS-3 | 33.0 | 1,157 |
| 99817 | 14/16-25 | 126.0 | 225.0 | | 90.0 | 25.0 | 35.0 | 37.0 | CP-4 | T20 | MS-3 | 38.0 | 1,211 |
| 99818 | 14/16-32 | 126.0 | 235.0 | | 100.0 | 32.0 | 35.0 | 37.0 | CP-4 | T20 | MS-3 | 38.0 | 1,490 |
| 99819 | 18/25-32 | 140.0 | 249.0 | | 100.0 | 32.0 | 40.0 | 45.0 | CP-5 | BRUG.5 | MS-4 | 42.0 | 1,903 |

Note: Inserts used on the tool line for splined profiles are all considered special: they are not in stock; rather, they are manufactured specifically for the customer based on the type of machining required. Please contact us for a quote.



duMONT CNC Indexable Broaching System

Tools and Inserts for Square


This series of duMONT tools was developed to execute internal squares. It offers the following advantages: absolute concentricity, the possibility of correcting the required measurement, machining speed and cost savings. Every insert size in this line is able to execute various square sizes, which makes using duMONT tools for squares very economical and convenient. To execute internal square holes, it is necessary to cut a pre-hole with a diameter based on the following formula:

$$\text{PRE-HOLE DIAMETER} = \text{SQUARE THICKNESS} \times 1.050$$

For example, for a square with a thickness of 10mm, the diameter of the pre-hole will be: 10mm x 1.050 = 10.50mm


To execute completely square holes, the customer will need to make a specific request and will be supplied with an ad hoc tool. In addition to this, in many other cases, in order to obtain a perfectly appropriate tool for the type of square hole that needs to be executed, it will be possible to produce a special tool that meets the customer's specifications.

Tools for Square

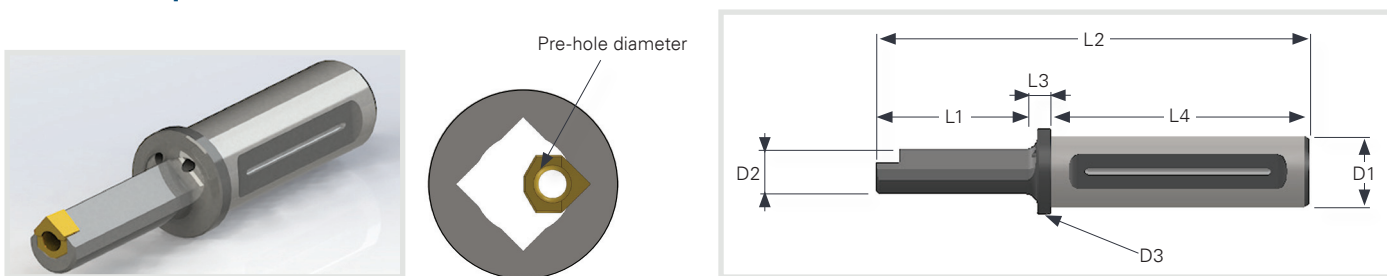

| Tools for Square (mm) | | | | | | | | | | | | | |
|-----------------------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | D1 (mm) | D2 (mm) | D3 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
| 99621 | 8/10-25 | 30.0 | 129.0 | 9.0 | 90.0 | 25.0 | 7.25 | 30.0 | CP-1 | T08 | MS-1 | 8.0 | 368 |
| 99622 | 8/10-32 | 30.0 | 139.0 | | 100.0 | 32.0 | 7.25 | 37.0 | CP-1 | T08 | MS-1 | 8.0 | 673 |
| 99623 | 10/13-25 | 40.0 | 139.0 | | 90.0 | 25.0 | 8.60 | 30.0 | CP-1 | T08 | MS-1 | 10.0 | 368 |
| 99624 | 10/13-32 | 40.0 | 149.0 | | 100.0 | 32.0 | 8.60 | 37.0 | CP-1 | T08 | MS-1 | 10.0 | 672 |
| 99625 | 13/16-25 | 50.0 | 149.0 | | 90.0 | 25.0 | 12.00 | 30.0 | CP-2 | T15 | MS-2 | 13.0 | 428 |
| 99626 | 13/16-32 | 50.0 | 159.0 | | 100.0 | 32.0 | 12.00 | 37.0 | CP-2 | T15 | MS-2 | 13.0 | 725 |
| 99627 | 16/19-25 | 52.0 | 151.0 | | 90.0 | 25.0 | 15.00 | 30.0 | CP-3 | T20 | MS-3 | 16.0 | 647 |
| 99628 | 16/19-32 | 52.0 | 161.0 | | 100.0 | 32.0 | 15.00 | 37.0 | CP-3 | T20 | MS-3 | 16.0 | 935 |
| 99629 | 19/27-25 | 86.0 | 185.0 | | 90.0 | 25.0 | 18.50 | 30.0 | CP-3 | T20 | MS-3 | 19.0 | 824 |
| 99630 | 19/27-32 | 86.0 | 195.0 | | 100.0 | 32.0 | 18.50 | 37.0 | CP-3 | T20 | MS-3 | 19.0 | 1,157 |
| 99631 | 27/37-25 | 100.0 | 199.0 | | 90.0 | 25.0 | 25.00 | 30.0 | CP-4 | T20 | MS-3 | 27.0 | 1,390 |
| 99632 | 27/37-32 | 100.0 | 209.0 | | 100.0 | 32.0 | 25.00 | 37.0 | CP-4 | T20 | MS-3 | 27.0 | 1,490 |
| 99633 | 37/50-32 | 140.0 | 249.0 | | 100.0 | 32.0 | 35.00 | 45.0 | CP-5 | BRUG-5 | MS-4 | 37.0 | 1,903 |

Inserts for Square

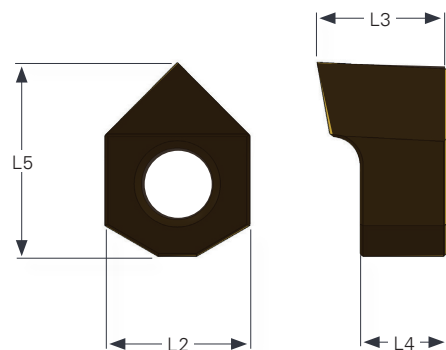

NEW for 2022

| Inserts for Square (mm) | | | | | | | | | | |
|-------------------------|----------------|--------------------|------------------------|---------|---------|---------|---------|------------------|--------------|--|
| TIN EDP No. | MAX HP Inserts | Working range (mm) | Working range (inches) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | Tool Holder Size | Sharpen Stem | |
| 99601 | 99601-M | 8mm/10mm | 0.314/0.393 | 6.00 | 7.00 | 5.00 | 7.00 | 8/10 | SS-1 | |
| 99602 | 99602-M | 10mm/13mm | 0.393/0.511 | 6.00 | 7.00 | 5.00 | 7.50 | 10/13 | SS-1 | |
| 99603 | 99603-M | 13mm/16mm | 0.511/0.629 | 10.00 | 8.00 | 6.00 | 12.00 | 13/16 | SS-2 | |
| 99604 | 99604-M | 16mm/19mm | 0.629/0.748 | 10.00 | 8.00 | 6.00 | 12.50 | 16/19 | SS-2 | |
| 99605 | 99605-M | 19mm/27mm | 0.748/1.062 | 13.00 | 13.00 | 10.00 | 17.00 | 19/27 | SS-3 | |
| 99606 | 99606-M | 27mm/37mm | 1.062/1.456 | 18.00 | 14.00 | 10.00 | 22.00 | 27/37 | SS-4 | |
| 99607 | 99607-M | 37mm/50mm | 1.456/1.968 | 26.00 | 18.00 | 10.00 | 30.00 | 37/50 | SS-5 | |

*Reference Radius Chart on pg. 61



duMONT CNC Indexable Broaching System

Tools and Inserts for Hexagon




The duMONT CNC Indexable Broaching System was developed to execute internal hexagons. It offers the following advantages: absolute concentricity, the possibility of correcting the required measurement, machining speed and cost savings. Every insert size in this line is able to execute various hexagonal sizes, which makes using duMONT tools for hexagons very economical and convenient. To execute internal hexagonal holes, it is necessary to cut a pre-hole with a diameter based on the following formula:

$$\text{PRE-HOLE DIAMETER} = \text{HEXAGON THICKNESS} \times 1.020$$

For example, for a hexagon with a thickness of 10mm, the diameter of the pre-hole will be: 10mm x 1.020 = 10.20mm


To achieve your desired hexagonal hole, contact our Engineering Department for a custom solution to meet your needs.

Tools for Hexagon

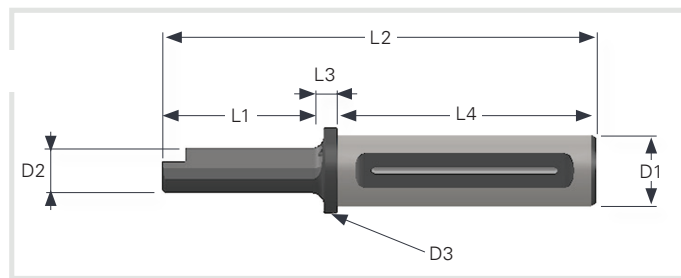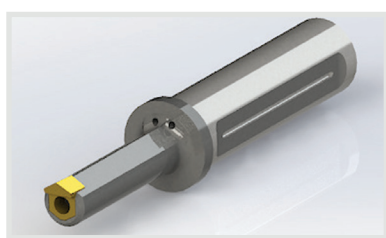

| Tools for Hexagon (mm) | | | | | | | | | | | | | |
|------------------------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | D1 (mm) | D2 (mm) | D3 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
| 99721 | 9/11-25 | 30.0 | 129.0 | 9.0 | 90.0 | 25.0 | 8.0 | 30.0 | CP-1 | T08 | MS-1 | 9.0 | 388 |
| 99722 | 9/11-32 | 30.0 | 139.0 | | 100.0 | 32.0 | 8.0 | 37.0 | CP-1 | T08 | MS-1 | 9.0 | 673 |
| 99723 | 11/17-25 | 40.0 | 139.0 | | 90.0 | 25.0 | 10.0 | 30.0 | CP-1 | T08 | MS-1 | 11.0 | 368 |
| 99724 | 11/17-32 | 40.0 | 149.0 | | 100.0 | 32.0 | 10.0 | 37.0 | CP-1 | T08 | MS-1 | 11.0 | 672 |
| 99725 | 17/28-25 | 56.0 | 155.0 | | 90.0 | 25.0 | 15.0 | 30.0 | CP-2 | T15 | MS-2 | 17.0 | 647 |
| 99726 | 17/28-32 | 56.0 | 165.0 | | 100.0 | 32.0 | 15.0 | 37.0 | CP-2 | T15 | MS-2 | 17.0 | 935 |
| 99727 | 28/37-25 | 86.0 | 185.0 | | 90.0 | 25.0 | 25.0 | 30.0 | CP-3 | T20 | MS-3 | 28.0 | 1,390 |
| 99728 | 28/37-32 | 86.0 | 195.0 | | 100.0 | 32.0 | 25.0 | 37.0 | CP-3 | T20 | MS-3 | 28.0 | 1,157 |
| 99729 | 37/45-25 | 126.0 | 225.0 | | 90.0 | 25.0 | 35.0 | 45.0 | CP-4 | T20 | MS-3 | 37.0 | 1,490 |
| 99730 | 37/45-32 | 126.0 | 235.0 | | 100.0 | 32.0 | 35.0 | 45.0 | CP-4 | T20 | MS-3 | 37.0 | 1,850 |
| 99731 | 45/70-32 | 140.0 | 249.0 | 100.0 | 32.0 | 40.0 | 45.0 | CP-5 | BRUG 5 | MS-4 | 45.0 | 1,950 | |

Inserts for Hexagon

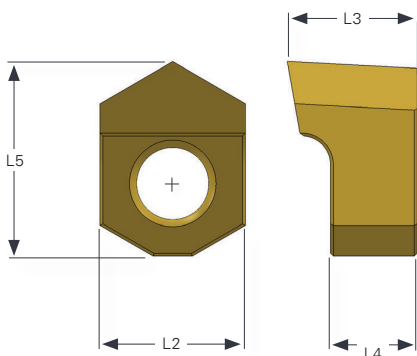

NEW for 2022


| Inserts for Hexagon (mm) | | | | | | | | | | |
|--------------------------|----------------|--------------------|------------------------|---------|---------|---------|---------|------------------|--------------|--|
| TIN EDP No. | MAX HP Inserts | Working range (mm) | Working range (inches) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | Tool Holder Size | Sharpen Stem | |
| 99701 | 99701-M | 9mm/11mm | 0.354/0.433 | 6.08 | 6.50 | 5.08 | 7.50 | 9/11 | SS-1 | |
| 99702 | 99702-M | 11mm/17mm | 0.433/0.669 | 6.08 | 7.00 | 5.00 | 8.00 | 11/17 | SS-1 | |
| 99703 | 99703-M | 17mm/28mm | 0.669/1.102 | 10.08 | 9.00 | 6.15 | 13.08 | 17/28 | SS-2 | |
| 99704 | 99704-M | 28mm/37mm | 1.102/1.456 | 13.08 | 14.00 | 10.00 | 18.50 | 28/37 | SS-3 | |
| 99705 | 99705-M | 37mm/45mm | 1.456/1.771 | 18.00 | 14.00 | 10.00 | 22.00 | 37/45 | SS-4 | |
| 99706 | 99706-M | 45mm/70mm | 1.771/2.755 | 26.00 | 18.00 | 10.00 | 30.00 | 45/70 | SS-5 | |

*Reference Radius Chart on pg. 61

duMONT CNC Indexable Broaching System

Stock Eccentric Bushings


The Eccentric Bushings are designed to allow the use of the Tool Holders in lathes that do not have a Y-axis. The Bushing, manufactured from tool steel, hardened and ground, enables symmetry corrections within a range of +Y 0.5mm (.020 inch) to -Y 0.5mm (.020 inch). The Eccentric Bushings can accommodate Tool Holders with either 25mm or 32mm shanks and are available in various diameters, allowing the Tooling System to be use in a wide variety of machines. Shorter VDI style Eccentric bushings are also available.

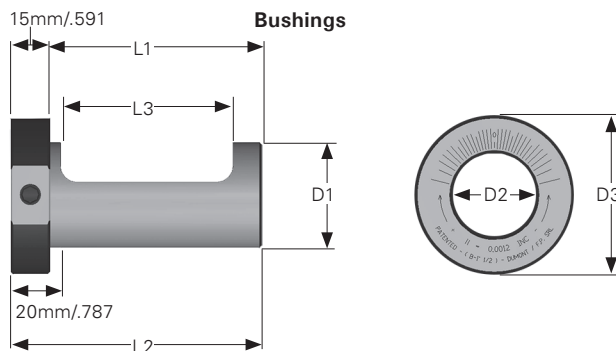

| Stock Eccentric Bushings for use with 25mm (.984 inch) and 32mm (1.260 inch) Tool Holders | | | | | | | | | | | | | |
|---|--------------|---------------------|--------|-------------------------|--------|-------------------|--------|---------------------|--------|----------------------|--------|----------------------|--------|
| EDP No. | Description | Shank Diameter (D1) | | Shank Internal Dia.(D2) | | Shank Length (L1) | | Overall Length (L2) | | Collar Diameter (D3) | | Undercut Length (L2) | |
| | | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) |
| 99060 | EB-1-1/4 | 31.8 | 1.250 | 25 | 0.984 | 70 | 2.756 | 85 | 3.346 | 55 | 2.165 | 58 | 2.283 |
| 99061 | EB-1-1/2 | 38.1 | 1.500 | 32 | 1.260 | 80 | 3.150 | 95 | 3.740 | 55 | 2.165 | 66 | 2.598 |
| 99062 | EB-2 | 50.8 | 2.000 | 32 | 1.260 | 100 | 3.937 | 115 | 4.528 | 65 | 2.559 | 75 | 2.953 |
| 99063 | EB-32 | 32 | 1.260 | 25 | 0.984 | 70 | 2.756 | 85 | 3.346 | 55 | 2.165 | 58 | 2.283 |
| 99064 | EB-40 | 40 | 1.575 | 32 | 1.260 | 80 | 3.150 | 95 | 3.740 | 55 | 2.165 | 66 | 2.598 |
| 99065 | EB-50 | 50 | 1.969 | 32 | 1.260 | 100 | 3.937 | 115 | 4.528 | 65 | 2.559 | 75 | 2.953 |
| 99066 | EB-60 | 60 | 2.362 | 32 | 1.260 | 100 | 3.937 | 115 | 4.528 | 80 | 3.150 | 75 | 2.953 |
| 99070 | EB-1-1/4-VDI | 31.8 | 1.250 | 25 | 0.984 | 50 | 1.969 | 65 | 2.559 | 55 | 2.165 | 38 | 1.496 |
| 99071 | EB-1-1/2-VDI | 38.1 | 1.500 | 32 | 1.260 | 65 | 2.559 | 80 | 3.150 | 55 | 2.165 | 51 | 2.008 |
| 99072 | EB-2-VDI | 50.8 | 2.000 | 32 | 1.260 | 80 | 3.150 | 95 | 3.740 | 65 | 2.559 | 55 | 2.168 |
| 99073 | EB-32-VDI | 32 | 1.260 | 25 | 0.984 | 50 | 1.969 | 65 | 2.559 | 55 | 2.165 | 38 | 1.496 |
| 99074 | EB-40-VDI | 40 | 1.575 | 32 | 1.260 | 65 | 2.559 | 80 | 3.150 | 55 | 2.165 | 51 | 2.008 |
| 99075 | EB-50-VDI | 50 | 1.969 | 32 | 1.260 | 80 | 3.150 | 95 | 3.740 | 65 | 2.559 | 55 | 2.165 |
| 99076 | EB-60-VDI | 60 | 2.362 | 32 | 1.260 | 80 | 3.150 | 95 | 3.740 | 80 | 3.150 | 55 | 2.165 |

Stock Square Adaptors

The Square Adaptors are available in two sizes for use with either 25mm or 32mm Tool Holders. The Adaptors provide a method for allowing the Tooling System to be used on traditional machines such as Slotting and Shaping machines. Manufactured from 39NiCrMo3 steel, heat treated and then blued, the Adaptor provides two holes 12 MA threaded for use with two flat head M12 x 8 screws to secure the Tool Holder in place. The Square Adaptor offers a locating slot on each of the four sides.

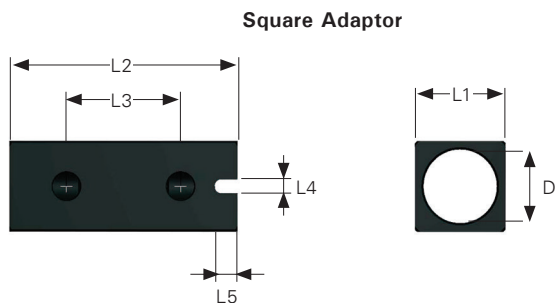


| Stock Square Adaptors | | | | | | | | | | | | | |
|-----------------------|-------------|---------------------|--------|---------------------|--------|---------------------|--------|-------------------------|--------|--------------------------|--------|--------------------------|--------|
| EDP No. | Description | Shank Diameter (D1) | | Width & Height (L1) | | Overall Length (L2) | | Locking Bolt Holes (L3) | | Locating Slot Width (L4) | | Locating Slot Depth (L5) | |
| | | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) | (mm) | (inch) |
| 99535 | SA-35 | 25 | .984 | 35 | 1.387 | 90 | 3.543 | 40 | 1.575 | 6 | .236 | 10 | 0.394 |
| 99540 | SA-40 | 32 | 1.260 | 40 | 1.575 | 100 | 3.937 | 50 | 1.969 | 6 | .236 | 10 | 0.394 |
| 99550 | SA-50 | 32 | 1.260 | 50 | 1.969 | 170 | 6.693 | 50 | 1.969 | 6 | .236 | 10 | 0.394 |



Stock Centering Plates

The Centering Plates are designed to fit specific Tool Holders and facilitate correct mounting and orientation of the Tool Holder. The Centering Plate sits in the Tool Holder, as does the Insert, and provides a surface to be referenced using a sensor or gauge.


The results are used to reference against the axis of the part to be processed. The chart below identifies the Tool Holders that can be used with a particular Centering Plate.

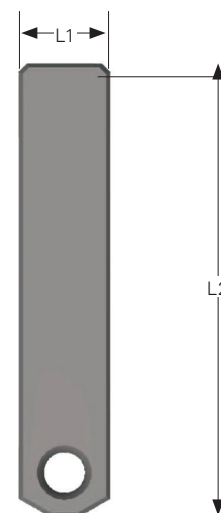

| Stock Centering Plates | | | | | | |
|------------------------|-------------|-----------------------------|-------------------|--------|-------------------|-------|
| EDP No. | Description | Used with tool holders size | Plate Height (L1) | | Plate Height (L2) | |
| | | | (mm) | (inch) | (mm) | inch |
| 99500 | CP-0 | 2 | 5 | 0.197 | 50 | 1.968 |
| 99501 | CP-1 | 3, 4 & 5 | 6 | 0.236 | 50 | 1.969 |
| 99502 | CP-2 | 6 & 8 | 10 | 0.394 | 50 | 1.969 |
| 99503 | CP-3 | 10 & 12 | 13 | 0.512 | 60 | 2.362 |
| 99504 | CP-4 | 14/16 | 18 | 0.709 | 70 | 2.756 |
| 99505 | CP-5 | 18/26 | 26 | 1.024 | 70 | 2.756 |

Stock Sharpening Stems

Insert life can be extended through re-sharpening of Inserts that show a decline in surface finish (a sign of wear). The Sharpening Stems, available in 5 sizes, are designed to accept specific Insert sizes. The Insert is removed from the Tool Holder and mounted on the Sharpening Stem. The Sharpening Stem holds the Insert securely in place as the cutting edge of the Insert is sharpened at its original angle using a suitable grinder and grinding wheel.

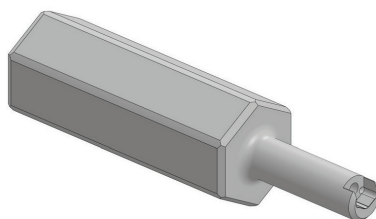

| Stock Sharpening Stems | | | | | |
|------------------------|-------------|-------------------------|-----------------------|----------------|--------|
| EDP No. | Description | Used with insert (inch) | Used with insert (mm) | Overall Length | |
| | | | | (mm) | (inch) |
| 99520 | SS-0 | 3/32 | 2 | 150 | 5.906 |
| 99521 | SS-1 | 1/8, 5/32 & 3/16 | 3, 4 & 5 | | |
| 99522 | SS-2 | 1/4, 9/32 & 5/16 | 6 & 8 | | |
| 99523 | SS-3 | 3/8 | 10 & 12 | | |
| 99524 | SS-4 | 7/16 – 5/8 | 14 & 16 | | |
| 99525 | SS-5 | 3/4-1 | 18 – 26 | | |

duMONT CNC Indexable Broaching System

Insert Mounting Screws and Torx Drivers

Inserts are mounted in the Tool Holder using a Torx Screw or 5mm Hex screw. The Screw size varies with the size of the Tool Holder. Replacement and extra Screws are available as are the appropriate size Torx Drivers. The charts on the right lists the individual Screw and Driver sizes and the Tool Holders they are used with.

| Stock Insert Mounting Screws and Torx Driver | | | | |
|--|-------------|---------|-------------|-----------------------------|
| EDP No. | Description | Style | Thread | Used with tool holders size |
| 99551 | MS-1 | Torx | M 2.5 x .45 | 2, 3, 4 & 5 |
| 99552 | MS-2 | Torx | M 4 x .70 | 6 & 8 |
| 99553 | MS-3 | Torx | M 6 x 1.00 | 10, 12 & 14/16 |
| 99554 | MS-4 | 5mm Hex | M 8 x 1.25 | 18/26 |

| Torx Drivers | | | |
|--------------|-------------|------------|-----------------------------|
| EDP No. | Description | Style | Used with tool holders size |
| 99561 | T-08 | Torx | 2, 3, 4 & 5 |
| 99562 | T-15 | Torx | 6 & 8 |
| 99563 | T-20 | Torx | 10, 12 & 14/16 |
| 99564 | 5mm | Hex Driver | 18/26 |

Stock Swivel Ball-Bearing Point Set Screws

Used in Lathe Without Y-axis

The Set Screws are used only in Lathe without Y-axis during Eccentric Bushing rotation to correct symmetry errors. Do not over-tighten Ball-Bearing Point Set Screw. It must allow the Tool Holder to move up and down as the Bushing is rotated. It is important to confirm the bolt requirements for the existing tooling to be used in the mounting of the Tooling System.

| Stock Swivel Ball-Bearing Point Set Screws | | | |
|--|-------------|-------------|--------|
| EDP No. | Description | Thread | Length |
| 99571 | BB-1 | M 6 x 1.00 | 15mm |
| 99572 | BB-2 | M 8 x 1.25 | 18mm |
| 99573 | BB-3 | M 10 x 1.5 | 23mm |
| 99574 | BB-4 | M 12 x 1.75 | 26mm |
| 99575 | BB-5 | M 14 x 2.00 | 30mm |
| 99576 | BB-6 | M 16 x 2.00 | 33mm |
| 99577 | BB-7 | UNC 5/16-18 | 37/64 |
| 99578 | BB-8 | UNC 3/8-16 | 5/8 |
| 99579 | BB-9 | UNC 1/2-13 | 3/4 |
| 99580 | BB-10 | UNC 5/8-11 | 36/64 |

duMONT CNC Indexable Broaching System

Accurate and Efficient

The duMONT CNC Indexable Broaching System offers a patented solution for effective and efficient broaching and shaping operations on CNC Lathes and Machining Centers as well as Slotting and shaping machines. The CNC Indexable Broaching system is designed to be flexible while delivering the rigidity and performance required. The CNC Indexable Broaching system allows the cutting of thru and blind hole keyways, keyways in a tapered bore and shaped or splined holes. Programming assistance is available, please refer to PilotPrecision.com or call 413-350-5200 for details.

System Components

Inserts – Stock Keyway and Slotting Inserts in Inch and Metric Sizes

The Insert designed to work exclusively with a duMONT Tool Holder is manufactured from a sintered steel alloy with a 13% cobalt content, heat treated to a 72 HRC hardness to provide toughness and impact resistance, and TiN coated to further enhance performance. Stock Inserts may be re-sharpened two to three times depending on the keyway width tolerance and requires recoating after re-sharpening. The Engineering Section discusses additional types of Special Inserts that may be designed and manufactured for specific applications.

Tool Holders – 25 & 32mm and 1 & 1-1/4 in Shank Tool Holders

The duMONT Tool Holder is designed to work exclusively with the Insert. The Holders are manufactured of heat treated tool steel hardened to 58/60 HRC at the Insert seat, providing resistance to deformation and longer tool life. The Tool Holders come in Standard and Long Lengths and can, in many cases, accommodate more than one insert size. The Stock Tool Holders are often used in conjunction with Special Form Inserts designed for specific applications.

Square Adaptors – Square Adaptors for use on Traditional Slotting, and Shaping Machines

The Square Adaptors provide a means of interfacing the Broaching System to a wide variety of conventional Slotting and Shaping Machines. The Square Adaptors are available in 1.378 (35mm) and 1.575 (40mm) size and accept the 25mm Tool Holder and 32mm Tool Holder respectively.

Centering Plates – Centering Plates for use in Tool Holders


The appropriate size Centering Plate is mounted in the Tool Holder to facilitate correct mounting and orientation of the Tool Holder with the machine. Through the use of a sensor or dial indicator, the centering of the Plate will be readily transferred to the Insert when mounted in the Tool Holder.

Sharpening Stems – Sharpening Stems for Stock Inserts

Hexagon shanked Sharpening Stems are available for mounting and supporting an Insert during re-sharpening. Inserts that show a decline in surface finish (a sign of wear), can have their life extended through a re-sharpening process. The Inserts are designed to allow two to three re-sharpenings, more if tolerances allow. Recoating of the Insert is required after sharpening.


Eccentric Bushings – Eccentric Bushings for 25mm and 32mm Tool Holders

The Eccentric Bushings are designed to facilitate the use of the Tooling System in Lathes that do not have a Y-axis adjustment. The Eccentric Bushing has a range of +/- .020 (0.5mm) and provides gradient lines each representing a displacement of .001 (0.03mm). This movement should be sufficient to adjust for any error that may occur on a CNC Lathe and insure proper alignment. The Bushings are also available in the shorter VDI style.

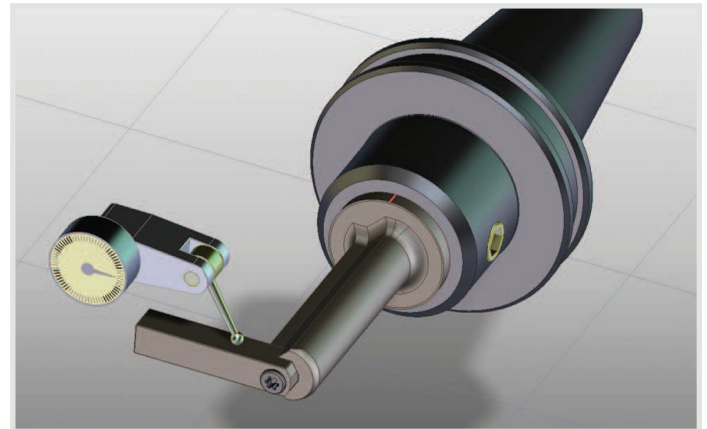

Mounting Screws – Insert Mounting Screws, Drivers and Set


Screw Inserts are mounted in the Tool Holder using a Torx Screw or a 5mm Hex Screw. The Screw size varies with the size of the Insert and Tool Holder. Replacement and extra Screws are available to avoid downtime, as are Torx Drivers as needed. Swivel Ball-Bearing Point Set Screws are used only in Lathes without Y-axis during Eccentric Bushing rotation to correct symmetry errors. Do not over-tighten the Ball-Bearing Point Set Screw – it must allow the Tool Holder to move up and down as the Bushing is rotated.

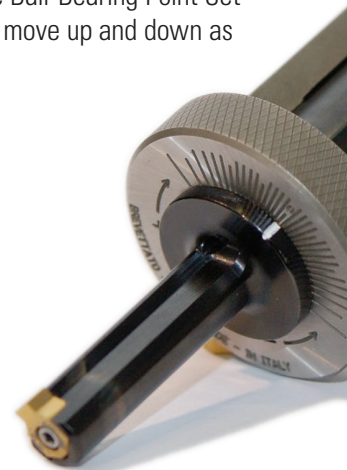

duMONT CNC Indexable Broaching System

Charging Handle for CNC Broaching Kit

Charging Handle Broach

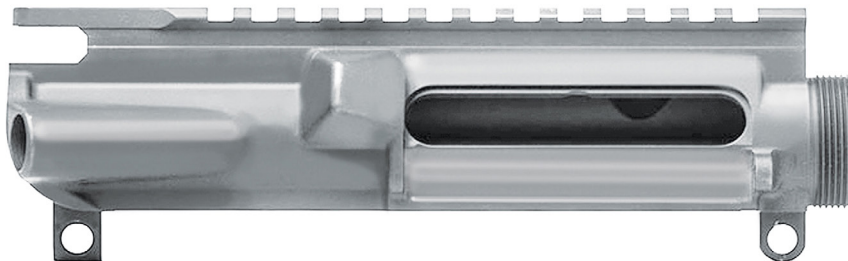

For improved functionality of charging handles, use our CNC Charging Handle Broaching Kit.

Key features and benefits include:

- Broach is internal to machine cycle
- No subcontractor/offline operation required
- Easy resharpening of insert (up to 3-5 times)
- Costs only 25% of traditional broaching

The Charging Handle CNC Broaching Kit is available for:

AR15 (.223/5.56 NATO)

AR10 (.308/.762)

AR22 (.22 LR)

AR9 (9mm)


Cutting Data includes:

300-500 IPM

.0035 CPP (cut per pass)



Estimated Cycle Time:
45 seconds

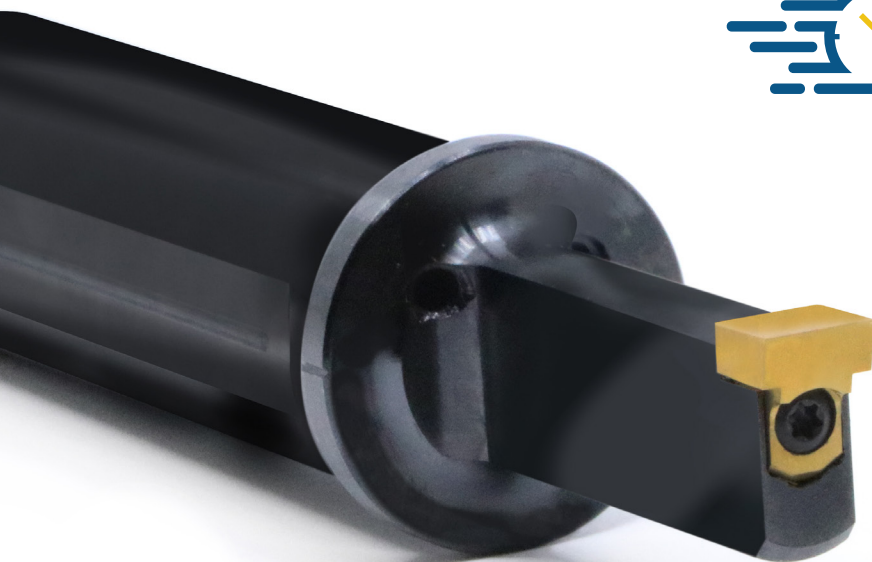

Charging Handle Kit

EDP 99914

(Comes with 4 inserts & mounting screws,
1 holder & torx driver)

Replacement Components

99925 AR Charging Handle Insert

99926 AR Charging Handle Holder

99562 T-15 Torx Driver

99552 MS-2 Mounting Screw

Inserts can be modified if needed.

AR Firearm CNC Broaching Kits

The **duMONT CNC AR15/M16 Magwell Kit** comes with 3 holders, 3 types of inserts, 2 drivers, and an alignment tool in a durable case. This kit allows all broaching of a magwell to be done within the CNC cycle. The need for a secondary broaching process in a special purpose broaching machine is eliminated!



**Save time: Approximate
1 minute 30 sec. total
broaching cycle time**

**Insert 1
Profile Insert**

**Insert 2
Long Straight Insert**

**Insert 3
Mag Catch Insert**

1-1/4" Shank Diameter Holders

CUTTING DATA

300-500 IPM with
.0035 stepover

ROUGHMILL
(with a $\phi 3/8"$ endmill)
then 51 passes

OR

ROUGHMILL
(with a $\phi 1/2"$ endmill)
then 69 passes

3 passes at final depth

Estimated Tool Life,
2,600 pieces TiN coated
EDP 99911 for AR10
EDP 99916 for AR15
Can be Resharpended
2-3 times

300-500 IPM with
.0035 stepover

ROUGHMILL
(with a $\phi 3/8"$ endmill)
then 45 passes

OR

ROUGHMILL
(with a $\phi 1/2"$ endmill)
then 63 passes

3 passes at final depth


Estimated Tool Life,
2,600 pieces TiN coated
EDP 99912 for AR10
EDP 99917 for AR15
Can be Resharpended
2-3 times

300-400 IPM with
.0025-.0055 stepover

ROUGHMILL
(with a $\phi 3/8"$ or $\phi 1/2"$ endmill)
then 15 passes

3 passes at final depth

Estimated Tool Life,
4,000 pieces TiN coated
EDP 99918 for AR10 & AR15
Can be Resharpended
2-3 times



A standard CNC broaching tool can be added if you would like to make the magazine reliefs square corners.



AR15/M16 and AR10 FIREARMS KIT

99910 AR10 Magwell Kit

99915 AR15 Magwell Kit

| Kit Components | |
|----------------|---|
| EDP No. | Description |
| 99910 | AR10 Mag Well Kit |
| 99911 | AR10 INSERT 1 (PROFILE) |
| 99912 | AR10 INSERT 2 |
| 99915 | AR15 MAGWELL KIT |
| 99916 | AR15 INSERT 1 (PROFILE) |
| 99917 | AR15 INSERT 2 (STRAIGHT) |
| 99918 | AR15 & AR10 INSERT 3 (MAG CATCH) |
| 99921 | AR15 & AR10 HOLDER 1 (TAKES INSERT 1 & 2) |
| 99922 | AR15 & AR10 HOLDER 2 (MAG CATCH) |

duMONT CNC Indexable Broaching System

1911 CNC Broaching Kit

Insertable tool vs. solid tool or round tool

1911 Broaching Kit

| EDP Nos. | |
|----------|--------------------|
| 99927 | 1911 Broaching Kit |


Complete Pistol Kits

The 1911 CNC Broaching Kit is available for:

| | |
|----------|--------|
| .45 ACP | .22 LR |
| 40 S&W | 10mm |
| .380 ACP | 9mm |

Components: 1 of each / kit

| EDP Nos. | |
|----------|--------------------------|
| 99928 | 1911 Magwell Insert |
| 99929 | 1911 Magwell Holder |
| 99930 | 1911 Trigger Slot Insert |
| 99931 | 1911 Trigger Slot Holder |
| 99932 | 1911 Trigger Bow Insert |
| 99933 | 1911 Trigger BowHolder |
| 99561 | T-08 Torx Driver |
| 99562 | T-15 Torx Driver |

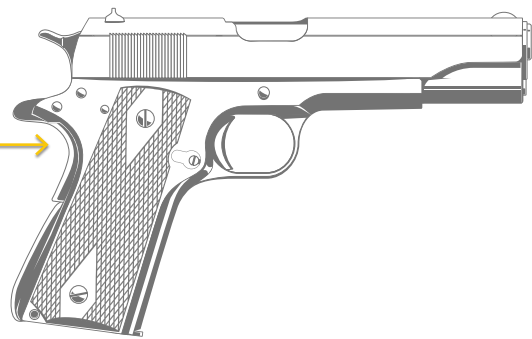

Trigger Bow Tool
Insert cut width -
0.235" / 5.9817 mm

Trigger Slot Tool
Insert cut width -
0.252" / 6.4008 mm


Magwell Tool
Insert cut width -
0.556" / 14.1224 mm

Inserts can be Custom Made to order

NEW! Now Available

Insertable Options for Breechfacing in Your CNC Applications for Gunslide Manufacturing

Our Breechface Broaches are easily assembled into a standard CNC holder. Calibers include: 9mm, .40, .45, .380 and 10mm. Our Breechface broaches are internal to machine cycle and do not require subcontracting/offline operation.

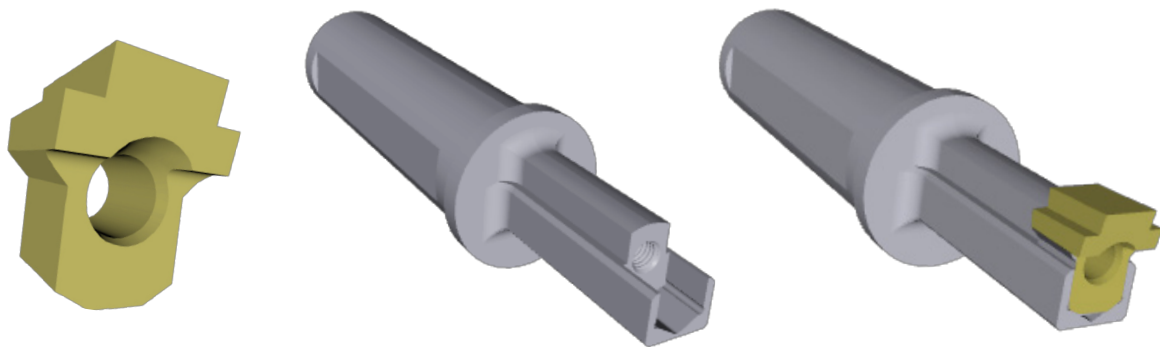


Insertable Tools Customized to Your Requirments

Custom Breechface Broaches for the Following Brands:

- Glock
- Smith & Wesson
- H&K
- Walther
- CZ
- Canik

Firearm Broaches we can support:

- Magwells
- Rifling
- Receiver
- Frame Broaches
- Slotters - Revolver
- Revolver Finishing

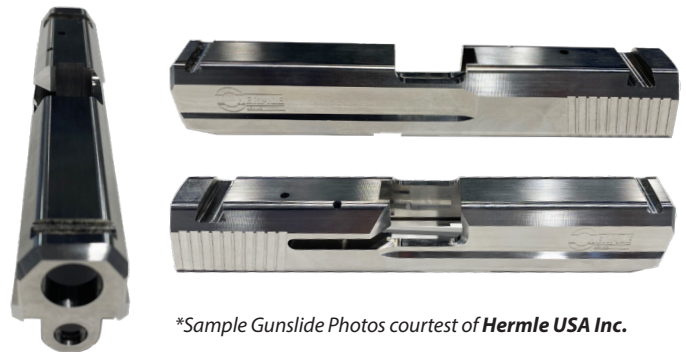


*Sample Gunslide Photos courtest of **Hermle USA Inc.**

Also Available: Custom Breechface Broaches for Slotting

* Delivery Available in 4-6 Weeks for Custom Products

* Custom broaches on pg. 26

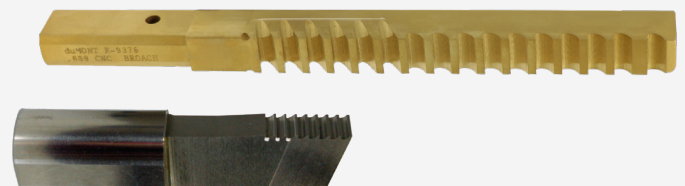


duMONT CNC Indexable Broaching System

Motorized Slotter

FASTER CNC Broaching with Optimal Performance

The duMONT Motorized Slotter can easily handle internal and external keyway and spline profiles in significantly shorter cycle times while consolidating operations in one machine and eliminating secondary broaching operations.

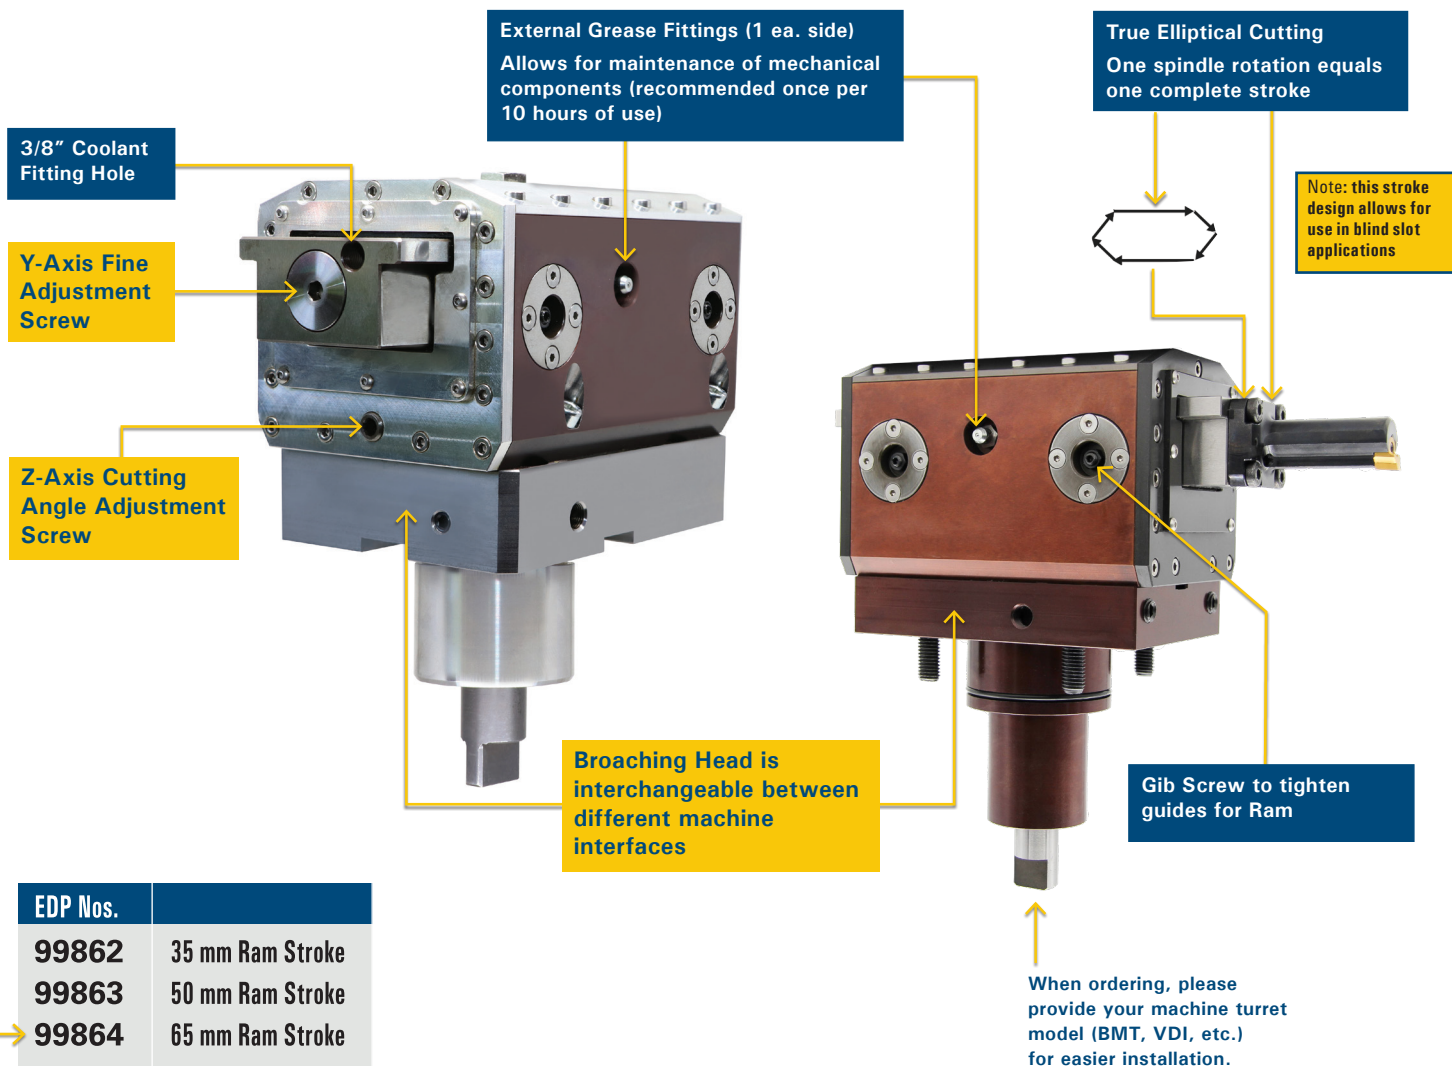

| EDP Nos. | |
|----------|------------------|
| 99862 | 35 mm Ram Stroke |
| 99863 | 50 mm Ram Stroke |
| 99864 | 65 mm Ram Stroke |

Key Features & Benefits

- 6 Sided Ram Design creates maximum torsional rigidity resulting in superior finish, tool life, and **allows for a longer 65 mm Stroke option**
- Great for shaping holes into hex or squares 1" or larger beyond rotary broaching limits
- Easy to maintain and rebuild based on the ability to grease/lubricate
- Rebuild* Kit is available for bearings and seals for DIY maintenance, or the unit can be sent back for maintenance at **Half the Cost of Competitors**

Cycle Time Comparison:

5-10x FASTER | **50x FASTER**

than other CNC Broaching Tools for OD & ID Slots & Splines | than Wire EDM in Slots and Splines

*12 Month Warranty on Product Defects

duMONT CNC Slotter DIY Kit

Easy Rebuild for Faster CNC Broaching

To keep your Motorized Slotter working at maximum efficiency, we give you the option of using our DIY Rebuild Kit or send us your equipment to repair at our facility. *General recommendation is to rebuild after 1000 continuous cycle hours.




| EDP Nos. | Rebuild Kit |
|----------|--|
| 99865 | 35 mm Ram Stroke |
| 99866 | 50 mm Ram Stroke |
| 99867 | 65 mm Ram Stroke |
| Rebuild | Pilot Standard Rebuild <i>*Average: 2 Weeks</i> |

Contact us for Quote on 48 hour Expedited Rebuild.

Price will vary depending on amount of work required.


**Loaner Heads available for Emergency Repairs only.*

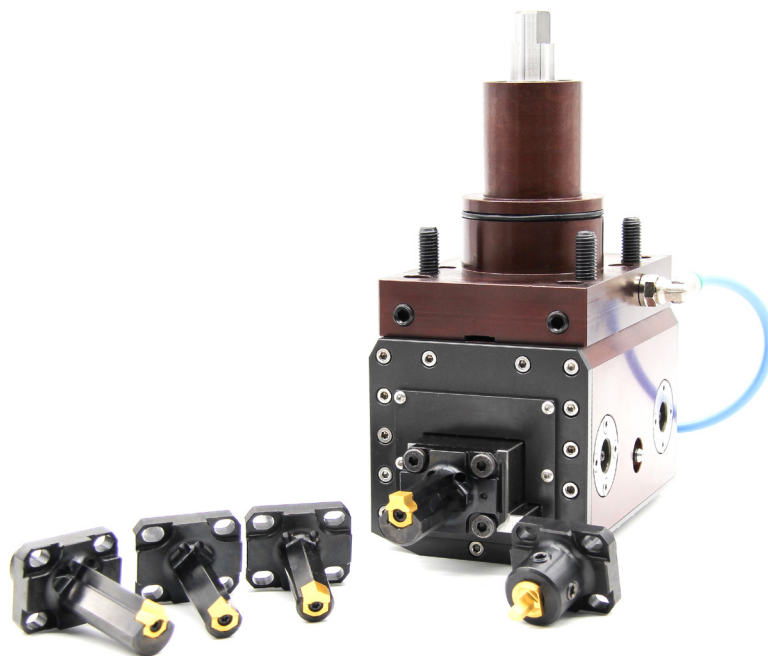

duMONT CNC Indexable Broaching System

MH Slotting Series Insert Holder

The line of tools illustrated here was developed for use on motorized slotting machines for CNC lathes. With the line of tools for motorized slotting machines, it is possible to use the inserts of standard lines for keyway seatings, for hexagonal profiles and for square profiles. It is also possible to manufacture tools and inserts for special profiles. The technical data table does not include the measurements for the diameter and length of the side designed for clamping inside the motorized slotting machine, as these measurements are defined case by case based on customer demands. The picture below is provided by way of example and illustrates one of the many possible shapes that the tool legs can have.

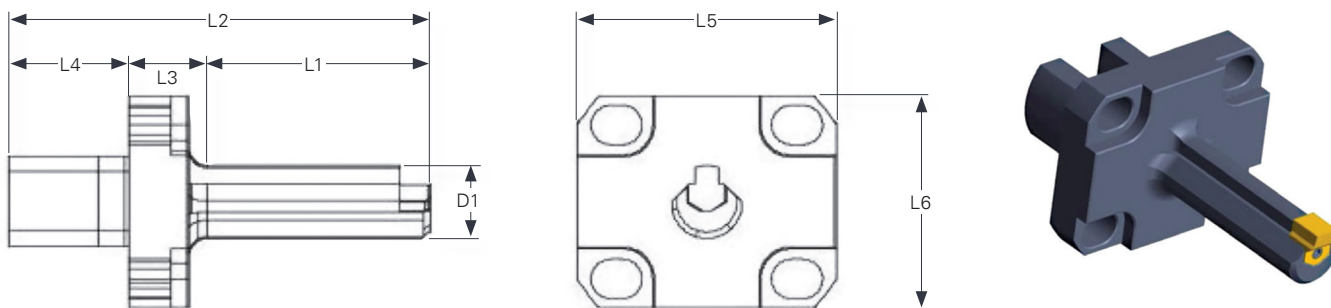

MH 35 / 50 / 65 Slotting Series Insert Holder




| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | D1 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum Bore Dia. | | Minimum hole (mm) | Weight (g) |
|---------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|-------------|-------------------|------------|
| | | | | | | | | | | | | (mm) | (inch) | | |
| 99161 | 02-35 | 25 | 58 | 13 | 20 | 43 | 35 | 6 | CP-0 | T-08 | MS-1 | 7 | 0.276 | 7 | 0.150 |
| 99162 | 03-35 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.5 | 0.335 | 8.7 | 0.160 |
| 99163 | 04-35 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 10.5 | 0.413 | 11 | 0.170 |
| 99164 | 05-35 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 12.5 | 0.492 | 13 | 0.180 |
| 99165 | 06-35 | 46 | 79 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 16.5 | 0.650 | 17 | 0.210 |
| 99166 | 08-35 | 46 | 79 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21 | 0.827 | 21.5 | 0.225 |
| 99167 | 10/12-35 | 46 | 79 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 28/30 | 1.102/1.181 | 24 | 0.235 |
| 99168 | 14/16-35 | 46 | 79 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 35 | 1.378 | 27 | 0.245 |
| 99169 | 02-50 | 25 | 58 | 13 | 20 | 43 | 35 | 6 | CP-0 | T-08 | MS-1 | 7 | 0.276 | 7 | 0.150 |
| 99170 | 03-50 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.5 | 0.335 | 8.7 | 0.160 |
| 99171 | 04-50 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 10.5 | 0.413 | 11 | 0.170 |
| 99172 | 05-50 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 12.5 | 0.492 | 13 | 0.180 |
| 99173 | 06-50 | 56 | 89 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 16.5 | 0.650 | 17 | 0.210 |
| 99174 | 08-50 | 56 | 89 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21 | 0.827 | 21.5 | 0.225 |
| 99175 | 10/12-50 | 56 | 89 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 28/30 | 1.102/1.181 | 24 | 0.235 |
| 99176 | 14/16-50 | 56 | 89 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 35 | 1.378 | 27 | 0.245 |
| 99177 | 02-65 | 25 | 58 | 13 | 20 | 43 | 35 | 6 | CP-0 | T-08 | MS-1 | 7 | 0.276 | 7 | 0.150 |
| 99178 | 03-65 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.5 | 0.335 | 8.7 | 0.160 |
| 99179 | 04-65 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 10.5 | 0.413 | 11 | 0.170 |
| 99180 | 05-65 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 12.5 | 0.492 | 13 | 0.210 |
| 99181 | 06-65 | 56 | 89 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 16.5 | 0.650 | 17 | 0.180 |
| 99182 | 08-65 | 68 | 102 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21 | 0.827 | 21.5 | 0.240 |
| 99183 | 10/12-65 | 70 | 103 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 28/30 | 1.102/1.181 | 24 | 0.265 |
| 99184 | 14/16-65 | 70 | 103 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 35 | 1.378 | 27 | 0.285 |

See pages 55-57 for accessories.

See pages 43-44 for inserts



MH Square Series Insert Holder

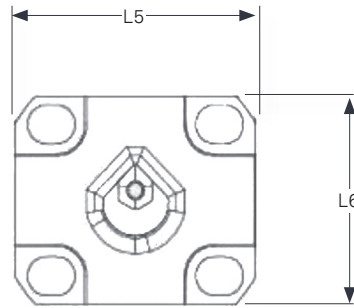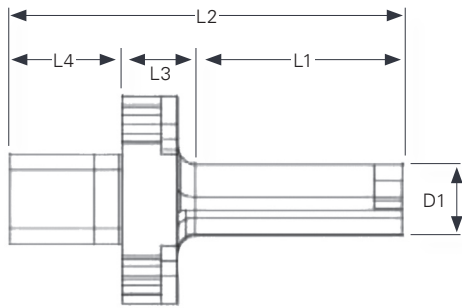

MH 35 / 50 / 65 Square Series Insert Holder

| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | D1 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
|---------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| 10000* | 8/10-35 | 30 | 58 | 13 | 20 | 43 | 35 | 7.25 | CP-1 | T-08 | MS-1 | 8 | 0.150 |
| 10001* | 10/13-35 | 40 | 63 | 13 | 20 | 43 | 35 | 8.6 | CP-1 | T-08 | MS-1 | 10 | 0.160 |
| 10002* | 13/16-35 | 46 | 73 | 13 | 20 | 43 | 35 | 12 | CP-2 | T-15 | MS-2 | 13 | 0.170 |
| 10003* | 16/19-35 | 46 | 79 | 13 | 20 | 43 | 35 | 15 | CP-3 | T-20 | MS-3 | 16 | 0.180 |
| 10004* | 19/27-35 | 46 | 79 | 13 | 20 | 43 | 35 | 18.5 | CP-3 | T-20 | MS-3 | 19 | 0.210 |
| 10005* | 27/37-35 | 46 | 79 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 27 | 0.225 |
| 10006* | 8/10-50 | 30 | 58 | 13 | 20 | 43 | 35 | 7.25 | CP-1 | T-08 | MS-1 | 8 | 0.150 |
| 10007* | 10/13-50 | 40 | 63 | 13 | 20 | 43 | 35 | 8.6 | CP-1 | T-08 | MS-1 | 10 | 0.160 |
| 10008* | 13/16-50 | 50 | 77 | 13 | 20 | 43 | 35 | 12 | CP-2 | T-15 | MS-2 | 13 | 0.170 |
| 10009* | 16/19-50 | 52 | 87 | 13 | 20 | 43 | 35 | 15 | CP-3 | T-20 | MS-3 | 16 | 0.210 |
| 10010* | 19/27-50 | 60 | 93 | 13 | 20 | 43 | 35 | 18.5 | CP-3 | T-20 | MS-3 | 19 | 0.225 |
| 10011* | 27/37-50 | 60 | 93 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 27 | 0.285 |
| 10012* | 8/10-65 | 30 | 58 | 13 | 20 | 43 | 35 | 7.25 | CP-1 | T-08 | MS-1 | 8 | 0.150 |
| 10013* | 10/13-65 | 40 | 63 | 13 | 20 | 43 | 35 | 8.6 | CP-1 | T-08 | MS-1 | 10 | 0.160 |
| 10014* | 13/16-65 | 50 | 77 | 13 | 20 | 43 | 35 | 12 | CP-2 | T-15 | MS-2 | 13 | 0.170 |
| 10015* | 16/19-65 | 52 | 87 | 13 | 20 | 43 | 35 | 15 | CP-3 | T-20 | MS-3 | 16 | 0.210 |
| 10016* | 19/27-65 | 75 | 108 | 13 | 20 | 43 | 35 | 18.5 | CP-3 | T-20 | MS-3 | 19 | 0.290 |
| 10017* | 27/37-65 | 75 | 108 | 13 | 20 | 43 | 35 | 25 | CP-4 | T-20 | MS-3 | 27 | 0.315 |

*please allow 2-4 weeks for delivery.
See pages 55-57 for accessories.
See page 46 for inserts.

Pre-Hole Diameter = Square Thickness X 1.050




For example, for a square with a thickness of 10mm, the diameter of the pre-hole will be: 10mm x 1.050 = 10.50mm

To execute completely square holes, the customer will need to make a specific request and will be supplied with an ad hoc tool.

In addition to this, in many other cases, to obtain a perfectly appropriate tool for the type of square hole that needs to be executed, it will be possible to produce a special tool that meets the customer's specifications.

duMONT CNC Indexable Broaching System

MH Hexagon Series Insert Holder

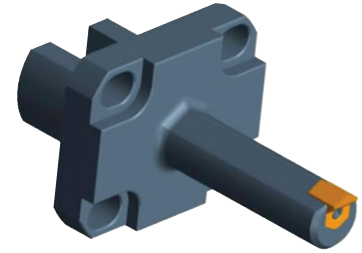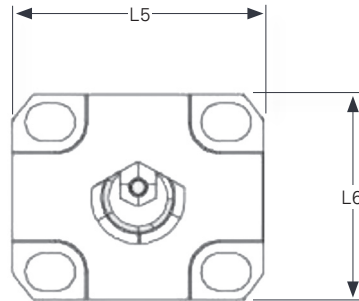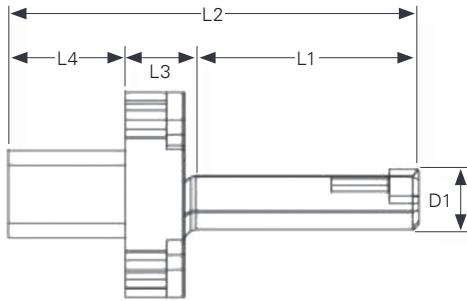

MH 35 / 50 / 65 Hexagon Series Insert Holder

| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | D1 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
|---------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| 10018* | 9/11-35 | 30 | 58 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.150 |
| 10019* | 11/17-35 | 40 | 63 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.160 |
| 10020* | 17/28-35 | 46 | 73 | 13 | 20 | 43 | 35 | 15 | CP-2 | T-15 | MS-2 | 16 | 0.170 |
| 10021* | 28/37-35 | 46 | 79 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.180 |
| 10022* | 37/45-35 | 46 | 79 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.270 |
| 10023* | 9/11-50 | 30 | 58 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.150 |
| 10024* | 11/17-50 | 40 | 63 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.160 |
| 10025* | 17/28-50 | 60 | 73 | 13 | 20 | 43 | 35 | 15 | CP-2 | T-15 | MS-2 | 16 | 0.210 |
| 10026* | 28/37-50 | 60 | 79 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.225 |
| 10027* | 37/45-50 | 60 | 79 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.245 |
| 10028* | 9/11-65 | 30 | 58 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.150 |
| 10029* | 11/17-65 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.160 |
| 10030* | 17/28-65 | 60 | 93 | 13 | 20 | 43 | 35 | 15 | CP-2 | T-15 | MS-2 | 16 | 0.210 |
| 10031* | 28/37-65 | 75 | 108 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.225 |
| 10032* | 37/45-65 | 75 | 108 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.275 |

*Please allow 2-4 weeks for delivery.

See pages 55-57 for accessories.

See page 47 for inserts.




Pre-Hole Diameter = Square Thickness X 1.020

For example, for a hexagon with a thickness of 10mm, the diameter of the pre-hole will be: 10mm x 1.020 = 10.20mm

To achieve your desired hexagonal hole, contact our Engineering Department for a custom solution to meet your needs.



MH-Spline Series Insert Holder

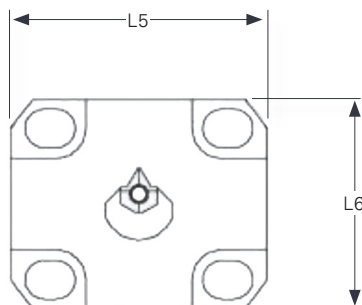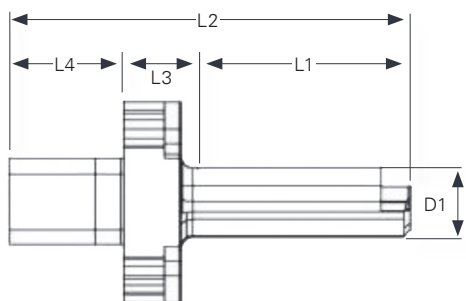

MH-Spline 35 / 50 / 65 Series Insert Holder

| EDP No. | Description | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | D1 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
|---------|-------------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| 10033* | 02-35 | 25 | 58 | 13 | 20 | 43 | 35 | 6.5 | CP-0 | T-08 | MS-1 | 7 | 0.150 |
| 10034* | 03-35 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.160 |
| 10035* | 04-35 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.170 |
| 10036* | 05-35 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 13 | 0.180 |
| 10037* | 06-35 | 46 | 79 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 17 | 0.210 |
| 10038* | 08-35 | 46 | 79 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21.5 | 0.225 |
| 10039* | 10-35 | 46 | 79 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 24 | 0.235 |
| 10040* | 12-35 | 46 | 79 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.245 |
| 10041* | 14/16-35 | 46 | 79 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.245 |
| 10042* | 02-50 | 25 | 58 | 13 | 20 | 43 | 35 | 6.5 | CP-0 | T-08 | MS-1 | 7 | 0.150 |
| 10043* | 03-50 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.160 |
| 10044* | 04-50 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.170 |
| 10045* | 05-50 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 13 | 0.180 |
| 10046* | 06-50 | 56 | 89 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 17 | 0.210 |
| 10047* | 08-50 | 60 | 93 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21.5 | 0.245 |
| 10048* | 10-50 | 60 | 93 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 24 | 0.265 |
| 10049* | 12-50 | 60 | 93 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.285 |
| 10050* | 14/16-50 | 60 | 93 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.310 |
| 10051* | 02-65 | 25 | 58 | 13 | 20 | 43 | 35 | 6.5 | CP-0 | T-08 | MS-1 | 7 | 0.150 |
| 10052* | 03-65 | 30 | 63 | 13 | 20 | 43 | 35 | 8 | CP-1 | T-08 | MS-1 | 8.7 | 0.160 |
| 10053* | 04-65 | 40 | 73 | 13 | 20 | 43 | 35 | 10 | CP-1 | T-08 | MS-1 | 11 | 0.170 |
| 10054* | 05-65 | 46 | 79 | 13 | 20 | 43 | 35 | 12 | CP-1 | T-08 | MS-1 | 13 | 0.180 |
| 10055* | 06-65 | 60 | 79 | 13 | 20 | 43 | 35 | 16 | CP-2 | T-15 | MS-2 | 17 | 0.210 |
| 10056* | 08-65 | 70 | 100 | 13 | 20 | 43 | 35 | 20 | CP-2 | T-15 | MS-2 | 21.5 | 0.245 |
| 10057* | 10-65 | 75 | 108 | 13 | 20 | 43 | 35 | 22 | CP-3 | T-20 | MS-3 | 24 | 0.265 |
| 10058* | 12-65 | 75 | 108 | 13 | 20 | 43 | 35 | 25 | CP-3 | T-20 | MS-3 | 27 | 0.310 |
| 10059* | 14/16-65 | 75 | 108 | 13 | 20 | 43 | 35 | 28 | CP-4 | T-20 | MS-3 | 30 | 0.310 |




*please allow 2-4 weeks for delivery. When ordering please provide your machine turret model (BMT, VDI, etc.) for easier installation. See pages 55-57 for accessories.

Note: Inserts used on the tool line for splined profiles are all considered special: they are not in stock; rather, they are manufactured specifically for the customer based on the type of machining required. Please contact us for a quote.

duMONT CNC Indexable Broaching System

MH-M Series Tool Holder Adaptor for the MINITOOL

10mm D

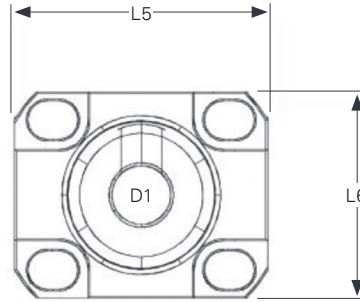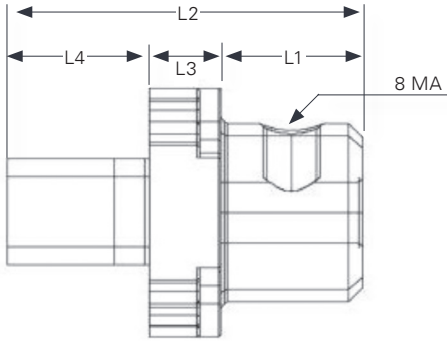

MH-M 35 / 50 / 65 Series Tool Holder Adaptor

| EDP No. | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | L5 (mm) | L6 (mm) | D1 (mm) | Centering Plate | Torx driver | Mounting screw | Minimum hole (mm) | Weight (g) |
|---------|---------|---------|---------|---------|---------|---------|---------|-----------------|-------------|----------------|-------------------|------------|
| 10060* | 20 | 50 | 10 | 20 | 43 | 35 | 10 | - | - | - | - | - |
| 10061* | 20 | 50 | 10 | 20 | 43 | 35 | 10 | - | - | - | - | - |
| 10062* | 20 | 50 | 10 | 20 | 43 | 35 | 10 | - | - | - | - | - |

*please allow 2-4 weeks for delivery.



See pages 41-42 and 46-48 for Tool Holders.

MINITOOL

*All Tools are Custom Made to Order

The MINITOOL series was developed based on the need to satisfy demands linked to machining small workpieces. Integral inserts were used to satisfy these demands, as these types of inserts make it possible to achieve extremely small cutting profiles, with very diverse geometries. In order to ensure high tool rigidity and achieve tools that are absolutely perfect for the operation that needs to be performed, the integral inserts are always designed ad hoc based on specific customer demands. To ensure the prompt supply of tools, Pilot Precision Products always has a stock of semi-finished MINITOOL inserts and has developed specific programs for its CNC sharpening machines, aimed at profiling inserts based on customer demands, in extremely short amounts of time. MINITOOL series inserts can fit UT-1/8 insert-carrier (available in different socket diameters). The aforementioned insert-carrier can, in turn, be internally fitted with eccentric bushing, the same way as the classic line duMONT tool and, therefore, can correct any alignment errors on CNC lathes that are not equipped with a Y-axis. Alternatively, MINITOOL inserts can be locked into the machine tool-carrier with a simple clamping gripper (for ex. an ER gripper). In this case, it is preferable for the machine tool to be equipped with a Y-axis.

Tool 1/8

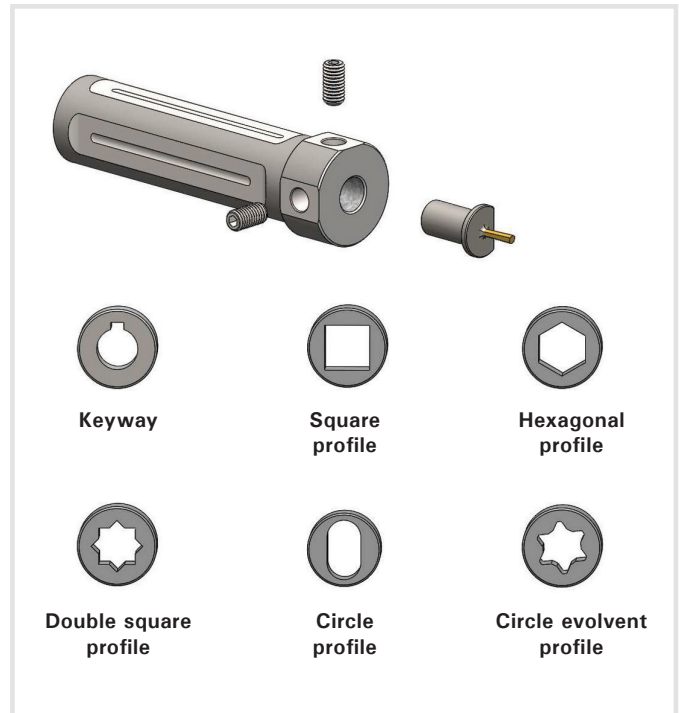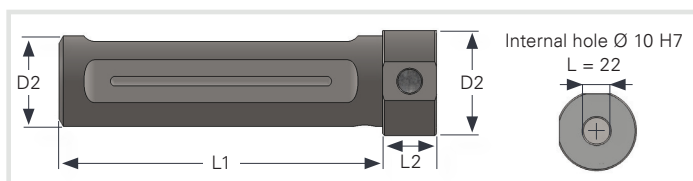

Tools for External Machining (mm)


| EDP No. | Description | L1 (mm) | L2 (mm) | D1 (mm) | D2 |
|---------|-------------|---------|---------|---------|------|
| 99906 | 1/8-3/4" | 90 | 15 | 30 | 3/4" |
| 99907 | 1/8-20mm | 90 | | 30 | 20mm |
| 99908 | 1/8-25mm | 90 | | 30 | 25mm |
| 99909 | 1/8-32mm | 100 | | 38 | 32mm |

*Reference pg. 68 - Hassay Custom Push Broaches


Index Broach with 10mm Shank for MINITOOL

Hex and Hexalobe 


An Alternative To Full Form Rotary Broaching




Single Point Hex Broach




Single Point Square Form




2 Point Hex Index Broach




4 Point Index Hex Broach



Full 6 Point Hex Form




Full 4 Point Hex Form



Full 6 Lobe Form



2 Index Lobe Broach



Keyway Shaper



Hex or Square Broach

Index Broaches can be made in the NEW MAX Alloy



2 or 4 Point Hex Broach Cutting Process

- Hole preparation completed with chamfer & proper pilot hole size
- Machine spindle locked
- Punch enters the work piece, cutting the work piece, then retracts.
- The machine spindle indexes 60° then locks
- The punch enters the work piece a second time, cutting the work piece, then retracts
- Machine spindle indexes 60° then locks
- Punch enters for a third and final imprint
- Drill or boring bar used to make pilot hole can re-enter cut and remove ribbons and chips formed inside the cut

2 Point Hex Broach Cutting Procedure is effective for broaching materials with higher tensile strength and relieves overall pressure during the process.



4 Point Hex Broach Cutting Procedure is effective for index broaching titanium and stainless steel materials to help improve better tolerances and surface finishes in the finished part.



6 Lobe Hexalobe Broach Cutting Procedures are similar procedures as 2 point or 4 point broach cutting. The process reduces overall pressure, improves tolerances and surface finishes. Ideal for automated production.



Required Tooling Includes:

- 90° Spot/Chamfer Tool
- Desired Pilot Drill
- Index Punch Broach

Typical Applications Include:

- Hexagonal
- Double Hexagonal
- 6 Lobe / Hexalobe
- Square
- Keyways / Slots / Splines

Why Hassay Savage Index Broaches?

- For Longer Production Runs
- Superb Surface Finishes
- Outstanding Tool Life in Stainless & Titanium
- Special Sizes, Special tolerances in Less Than 5 Days
- Produce bone screws to ± 0.0002 Tolerance



duMONT CNC Indexable Broaching System

Engineering Section



Special Inserts and Applications

The CNC Indexable Broaching System offers a wide range of Special Design Inserts that provide the opportunity to manufacture parts more efficiently and accurately through single machine processing. When location or timing is a critical design element of the part, the tooling system offers a means to do more work within the same coordinate system. Allow us to put our experience to work for you. Get the right Insert for the material you are machining, the shape or form you require with the programming needed to get your job done. Please contact us at 413-350-5200.

Blind Hole Inserts

Blind Hole Cutting requires a Special Insert. The Insert's composition and hardness is altered to reduce the risk of chipping. Additional design considerations are required for small diameter holes with restricted chip flow, deep hole cutting, and when working with bars of material in lathe operations. The programs used for Blind Hole Cutting require that special attention be given to the end of each stroke and the retraction of the Insert. A straight X-axis move out of the work can result in chipping of the Insert. Programming assistance is available; the manufacturer, model, and controls of the machine to be used as well as a fully dimensioned drawing of the finished part are required. The proper design, insert material, and programming is essential to success.

Cornering Inserts

Machine Squares, Hexagons, and Octagons with Inserts designed with two cutting edges intersecting at the appropriate angle 90°, 120° or 135°. Cut the corner, rotate the spindle (C axis) as required for the next cut (re-run of the subroutine) and repeat to completion. The same cornering Inserts may be used to generate a range of sizes of the given shape by simply increasing or decreasing the tool offset.

Internal Tothing and Grooving Inserts

Inserts designed to meet industry standards (ANSI, DIN, ISO etc.) as well as nonstandard geometries are available. A chamfering feature may be added in order to produce a burr-free part. One machine processing in the same coordinate system promotes product uniformity and processing efficiencies.

Sharpening – Allow us to extend the life of your inserts

Re-sharpening extends the life of the Insert and saves money. The Inserts that show a decline in surface finish (a sign of wear), can have their life extended through a resharpener process. The Inserts are designed to allow two to three resharpenings, more if tolerances allow. A Sharpening Stem is available for mounting and supporting of an Insert during re-sharpening. The Stem's hexagon shank facilitates the resharpener process. Sharpening must be properly performed using an appropriate grinder and grinding wheel. The original cutting angle must be maintained. Recoating of the Insert is required after sharpening.

Contact us for a quote to re-sharpen your inserts to proper manufactured geometry.

CNC Programming Support

Programming – Allow us to put our experience to work for you.

Programming assistance is available; the make, model, and controls of the machine used, along with a print drawing of the part, is required.

In the CNC program, it is necessary to establish an approaching value which accounts for the "cord," the distance from the center of the cutting edge of the Insert to I.D. of the bore at the point the corners of the Inserts contact the I.D. of the bore. This distance is a function of Insert width and Bore Diameter. The approaching value being sufficiently lower than the diameter of the bore avoids damage to the Insert.

On-site engineering programming service is available at an hourly rate plus travel costs.

** It is necessary on larger cuts 12mm or ½ inch keyways and above to cut in two operations, a roughing pass with a smaller width insert (approximate ½ required width) and finishing pass at the desired width. This approach reduces the pressure required.

duMONT CNC Indexable Broaching System

Engineering Section - Tool Holder Speeds & Feeds

| Aluminum | | | | Bronze | | | Mild Steel / Low Alloy Steel | | | High Alloy Steel | | | Stainless | | |
|-----------------|-----------------------|----------------------------|-------------------------|-----------------------|----------------------------|-------------------------|------------------------------|----------------------------|-------------------------|-----------------------|----------------------------|-------------------------|-----------------------|----------------------------|-------------------------|
| Width of Insert | Cut per Stroke (inch) | Cutting Speed (inches/min) | Pressure Required (lbs) | Cut per Stroke (inch) | Cutting Speed (inches/min) | Pressure Required (lbs) | Cut per Stroke Inch | Cutting Speed (inches/min) | Pressure Required (lbs) | Cut per Stroke (inch) | Cutting Speed (inches/min) | Pressure Required (lbs) | Cut per Stroke (inch) | Cutting Speed (inches/min) | Pressure Required (lbs) |
| 3/32 | 0.0060 | 480 | 71 | 0.0040 | 340 | 132 | 0.0035 | 300 | 182 | 0.0030 | 230 | 170 | 0.0023 | 200 | 141 |
| 1/8 | 0.0060 | 480 | 94 | 0.0040 | 340 | 176 | 0.0035 | 300 | 242 | 0.0028 | 230 | 211 | 0.0025 | 200 | 204 |
| 5/32 | 0.0060 | 480 | 118 | 0.0040 | 340 | 220 | 0.0035 | 300 | 302 | 0.0025 | 230 | 235 | 0.0023 | 200 | 235 |
| 3/16 | 0.0060 | 480 | 141 | 0.0040 | 340 | 236 | 0.0033 | 300 | 342 | 0.0025 | 230 | 282 | 0.0023 | 200 | 281 |
| 1/4 | 0.0055 | 480 | 172 | 0.0032 | 340 | 281 | 0.0025 | 300 | 345 | 0.0022 | 230 | 331 | 0.0020 | 200 | 326 |
| 9/32 | 0.0055 | 400 | 194 | 0.0032 | 300 | 316 | 0.0022 | 265 | 341 | 0.0021 | 200 | 355 | 0.0020 | 175 | 366 |
| 5/16 | 0.0050 | 400 | 196 | 0.0032 | 300 | 351 | 0.0022 | 265 | 379 | 0.0020 | 200 | 376 | 0.0019 | 175 | 387 |
| 3/8 | 0.0050 | 400 | 235 | 0.0027 | 300 | 355 | 0.0019 | 265 | 393 | 0.0017 | 200 | 384 | 0.0016 | 175 | 391 |
| 7/16 | 0.0044 | 400 | 241 | 0.0027 | 300 | 414 | 0.0018 | 265 | 434 | 0.0016 | 200 | 421 | 0.0015 | 175 | 428 |
| 1/2 | 0.0042 | 380 | 263 | 0.0026 | 270 | 456 | 0.0016 | 230 | 441 | 0.0015 | 180 | 451 | 0.0014 | 150 | 456 |
| 9/16 | 0.0040 | 380 | 282 | 0.0024 | 270 | 473 | 0.0016 | 230 | 496 | 0.0014 | 180 | 473 | 0.0013 | 150 | 476 |
| 5/8 | 0.0040 | 380 | 313 | 0.0023 | 270 | 504 | 0.0015 | 230 | 517 | 0.0014 | 180 | 526 | 0.0013 | 150 | 529 |
| 3/4 | 0.0035 | 380 | 329 | 0.0020 | 270 | 526 | 0.0013 | 230 | 538 | 0.0012 | 180 | 541 | 0.0011 | 150 | 538 |
| 2mm | 0.0060 | 480 | 59 | 0.0040 | 340 | 110 | 0.0035 | 300 | 151 | 0.0025 | 230 | 118 | 0.0023 | 200 | 118 |
| 3mm | 0.0060 | 480 | 89 | 0.0040 | 340 | 165 | 0.0035 | 300 | 227 | 0.0025 | 230 | 177 | 0.0023 | 200 | 176 |
| 4mm | 0.0060 | 480 | 118 | 0.0040 | 340 | 220 | 0.0035 | 300 | 303 | 0.0025 | 230 | 236 | 0.0023 | 200 | 235 |
| 5mm | 0.0060 | 480 | 148 | 0.0036 | 340 | 248 | 0.0033 | 300 | 357 | 0.0025 | 230 | 295 | 0.0023 | 200 | 294 |
| 6mm | 0.0055 | 480 | 162 | 0.0032 | 340 | 264 | 0.0033 | 300 | 429 | 0.0022 | 230 | 312 | 0.0020 | 200 | 307 |
| 8mm | 0.0055 | 400 | 216 | 0.0032 | 300 | 353 | 0.0025 | 265 | 433 | 0.0020 | 200 | 378 | 0.0018 | 175 | 368 |
| 10mm | 0.0050 | 400 | 246 | 0.0027 | 300 | 372 | 0.0020 | 265 | 433 | 0.0017 | 200 | 401 | 0.0016 | 175 | 409 |
| 12mm | 0.0045 | 380 | 266 | 0.0027 | 270 | 446 | 0.0019 | 230 | 494 | 0.0015 | 180 | 425 | 0.0014 | 150 | 430 |
| 14mm | 0.0040 | 380 | 276 | 0.0025 | 270 | 482 | 0.0017 | 230 | 515 | 0.0013 | 180 | 430 | 0.0013 | 150 | 466 |
| 16mm | 0.0040 | 380 | 315 | 0.0022 | 270 | 485 | 0.0015 | 230 | 520 | 0.0013 | 180 | 491 | 0.0011 | 150 | 450 |
| 18mm | 0.0037 | 380 | 328 | 0.0020 | 270 | 496 | 0.0014 | 230 | 546 | 0.0012 | 180 | 510 | 0.0010 | 150 | 461 |
| 20mm | 0.0034 | 360 | 335 | 0.0019 | 250 | 523 | 0.0013 | 200 | 563 | 0.0012 | 150 | 567 | 0.0010 | 130 | 512 |
| 22mm | 0.0032 | 360 | 346 | 0.0018 | 250 | 546 | 0.0012 | 200 | 571 | 0.0010 | 150 | 520 | 0.0010 | 130 | 535 |
| 25mm | 0.0032 | 360 | 394 | 0.0017 | 250 | 585 | 0.0011 | 200 | 595 | 0.0009 | 150 | 531 | 0.0009 | 130 | 544 |

Slotter Speeds & Feeds

To help ensure a long service life for your broaching tools and an excellent processing finish, it is advisable to follow these parameters:

| | 35 mm Ram Stroke | 50 mm Ram Stroke | 65 mm Ram Stroke | RPM = cut speed ÷ (ram stroke x 2) | |
|-----------------|------------------|------------------|------------------|------------------------------------|--------------------------|
| | Insert Width | Insert Width | Insert Width | Cutting speed | Cut per Stroke Min / Max |
| Aluminum | 5/8 in. | 5/8 in. | 5/8 in. | 1496 in./min. | .0023/.0059 in. |
| Soft steel | 9/16 in. | 9/16 in. | 9/16 in. | 1299 in./min. | .0015/.0027 in. |
| Cast iron | 9/16 in. | 9/16 in. | 1/2 in. | 1102 in./min. | .0015/.0027 in. |
| Common steel | 9/16 in. | 9/16 in. | 1/2 in. | 1181 in./min. | .0011/.0019 in. |
| Hardened steel | 1/2 in. | 1/2 in. | 3/8 in. | 984 in./min. | .0007/.0015 in. |
| Stainless steel | 1/2 in. | 1/2 in. | 3/8 in. | 984 in./min. | .0007/.0015 in. |
| Plastic | 3/4 in. | 3/4 in. | 3/4 in. | 1574 in./min. | .0027/.0059 in. |
| Bronze-Brass | 9/16 in. | 1/2 in. | 1/2 in. | 1181 in./min. | .0011/.0023 in. |

Distance from Centerline to Cutting Edge



| Square | |
|----------|-----------------|
| IN | Tool Radius(mm) |
| SQ-8/10 | 4.25 |
| SQ-10/13 | 4.80 |
| SQ-13/16 | 7 |
| SQ-16/9 | 8.50 |
| SQ-19/27 | 10.75 |
| SQ-27/37 | 14.5 |
| SQ-37/50 | 20.5 |

| Hex | |
|-----------|-----------------|
| IN | Tool Radius(mm) |
| HEX-9/11 | 4.5 |
| HEX-11/17 | 5.5 |
| HEX-17/28 | 8.5 |
| HEX-28/37 | 14 |
| HEX-37/45 | 19.50 |
| HEX-45/70 | 23 |


| Standard Keyway | |
|-----------------|-----------------|
| IN | Tool Radius(mm) |
| UT-2 | 3.50 |
| UT-3 | 4.50 |
| UT-4 | 5.50 |
| UT-5 | 6.50 |
| UT-6 | 9.00 |
| UT-8 | 11.00 |
| UT=10 | 14.00 |
| UT-12 | 15.50 |
| UT-14/16 | 19.00 |
| UT-18/26 | 22.00 |



PILOT

Table of Contents

| | |
|--|-----------|
| Hexagonal Rotary Punch Broaches | 64 |
| Hexagonal Rotary Punch Broaches M-2 and MAX | 65 |
| Square Rotary Punch Broaches | 66 |
| Rotary Broaching Set-Up Plugs | 67 |
| Index Broaching | 68 |
| Adjustable Rotary Broach Holders | 69 |
| Swiss-Style Non-Adjustable Holders | 70 |
| Use Recommendations | 71 |
| Static Index Punch Broach Holders | 72 |
| Quick Change ER Collet Punch & Index Broach ER Holder Systems | 72 |
| Ultra-Precision Floating Reamer Holders | 73 |
| Advanced Precision Micro Tool Holders | 73 |
| Micro-XL Tool Holders - Micro End Mill Extensions | 74 |

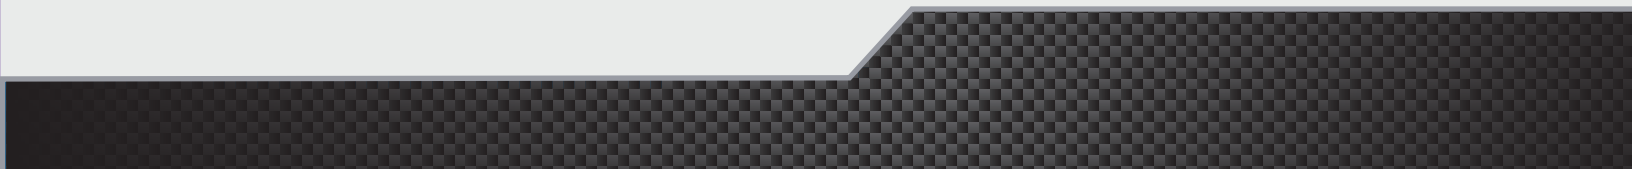

Hexagonal Rotary Punch Broaches

Material: **MAX Proprietary Alloy** For More Difficult To Machine Materials**MAX Out** Your Rotary Broaching**2X Tool Life** Compared to a T-15**37% Decrease in Overall CPP (Cost Per Part)****Hassay MAX**

Manufactured from custom hardened alloys, these hex, square and punch rotary broaches are a **specialty formulated material** that combines high hardness with exceptional abrasion resistance and toughness.

They're ideal for sockets where long tool life is required and are intended for use on materials with hardness up to 50 Hrc, such as:

- Cobalt-Chrome
- Custom 455
- Biodur 108 & 22-13-15
- 17-4 Stainless Steel
- Strain Hardened 316
- Titanium
- Inconel 718
- Monel
- Hardened A286/304
- 303 Stainless Steel

Our rotary broaches offer many **advantages** over conventional coated & uncoated broaching tools, including:

- Edge Toughness for High Production Applications
- Better Heat Resistance
- 2x-10x Longer Tool Life

*Also offered in Swiss style - see pg. 67

**Proprietary Alloy****Ideal for Applications in These Industries**

Fasteners



Automotive



Electronics



Medical/Dental



Aerospace



Defense

Hassay Savage Rotary Broaching

Hexagonal Rotary Punch Broaches M-2 and MAX



Material: **M-2 HSS** for mild steel applications,
MAX Alloy available for more difficult to machine alloys

Rotary/Punch Broaches:

- Use in a variety of machines
- Cut polygons in blind holes
- Any type of CNC or manual turning, milling, drilling or screw machine.

Punching Versus Rotary Broaching:

Many applications can be achieved without the rotary broach holder.

For the purpose of merely punching a polygon into an existing pilot hole, these broaches have successfully been used with universal machining methods.



| Hexagonal Rotary/Punch Broaches 1/2" – 0.500 Shank | | | | | |
|---|------------------------------|-------------------|-----------------|-----------------------|---------------------------|
| Hex Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX |
| 3/32 | 0.095 | 7/32 | 1-3/4 | 66106 | 66106-M |
| 7/64 | 0.111 | 1/4 | | 66107 | 66107-M |
| 1/8 | 0.127 | 1/4 | | 66108 | 66108-M |
| 9/64 | 0.143 | 5/16 | | 66109 | 66109-M |
| 5/32 | 0.158 | 5/16 | | 66110 | 66110-M |
| 3/16 | 0.190 | 3/8 | | 66112 | 66112-M |
| 7/32 | 0.221 | | | 66114 | 66114-M |
| 1/4 | 0.252 | 7/16 | | 66116 | 66116-M |
| 9/32 | 0.284 | 7/16 | | 66118 | 66118-M |
| 5/16 | 0.315 | 7/16 | | 66120 | 66120-M |
| 11/32 | 0.346 | 11/16 | | 66122 | 66122-M |
| 3/8 | 0.378 | | | 66124 | 66124-M |
| 13/32 | 0.410 | 11/16 | | 66126 | 66126-M |
| 7/16 | 0.441 | | | 66128 | 66128-M |
| 15/32 | 0.472 | 5/8 | 66130 | 66130-M | |
| 1/2 | 0.504 | | 66132 | 66132-M | |
| 9/16 | 0.567 | | 66136 | 66136-M | |
| 5/8 | 0.630 | | 66140 | 66140-M | |
| 11/16 | 0.693 | | 66144 | 66144-M | |
| 3/4 | 0.755 | | 66148 | 66148-M | |

| Hexagonal Rotary/Punch Broaches 8mm – 0.315 Shank | | | | | |
|--|------------------------------|-------------------|-----------------|-----------------------|---------------------------|
| Hex Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX |
| .050 | 0.050 | 7/64 | 1-1/4 | 66002 | 66002-M |
| 1/16 | 0.063 | 5/32 | | 66004 | 66004-M |
| 5/64 | 0.079 | 9/64 | | 66005 | 66005-M |
| 3/32 | 0.095 | 7/32 | | 66006 | 66006-M |
| 7/64 | 0.111 | 7/32 | | 66007 | 66007-M |
| 1/8 | 0.127 | 1/4 | | 66008 | 66008-M |
| 9/64 | 0.143 | 9/32 | | 66009 | 66009-M |
| 5/32 | 0.158 | 5/16 | | 66010 | 66010-M |
| 3/16 | 0.190 | 11/32 | | 66012 | 66012-M |
| 7/32 | 0.221 | 13/32 | | 66014 | 66014-M |
| 1/4 | 0.252 | 7/16 | | 66016 | 66016-M |
| 9/32 | 0.284 | | | 66018 | 66018-M |
| 5/16 | 0.315 | 7/16 | | 66020 | 66020-M |
| 11/32 | 0.346 | | | 66022 | 66022-M |
| 3/8 | 0.378 | 1/2 | 66024 | 66024-M | |
| 13/32 | 0.410 | | 66026 | 66026-M | |
| 7/16 | 0.441 | | 66028 | 66028-M | |
| 15/32 | 0.472 | | 66030 | 66030-M | |
| 1/2 | 0.504 | | 66032 | 66032-M | |

HassayMAX



| Metric Hexagonal Rotary/Punch Broaches 1/2" – 0.500 Shank | | | | | |
|--|------------------------------|-------------------|-----------------|-----------------------|---------------------------|
| Hex Size (mm) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX |
| 2.0 | 0.081 | 1-3/4 | 66302 | 66302-M | |
| 2.5 | 0.101 | | 7/32 | 663025 | 663025-M |
| 3.0 | 0.120 | | 1/4 | 66303 | 66303-M |
| 4.0 | 0.160 | | 5/16 | 66304 | 66304-M |
| 5.0 | 0.199 | | 3/8 | 66305 | 66305-M |
| 6.0 | 0.238 | | 7/16 | 66306 | 66306-M |
| 7.0 | 0.278 | | 1/2 | 66307 | 66307-M |
| 8.0 | 0.320 | | 9/16 | 66308 | 66308-M |
| 9.0 | 0.358 | | | 66309 | 66309-M |
| 10.0 | 0.399 | | 5/8 | 66310 | 66310-M |
| 11.0 | 0.437 | | | 66311 | 66311-M |
| 12.0 | 0.476 | | 5/8 | 66312 | 66312-M |
| 13.0 | 0.516 | | | 66313 | 66313-M |
| 14.0 | 0.556 | | 7/8 | 66314 | 66314-M |
| 15.0 | 0.597 | 66315 | | 66315-M | |
| 16.0 | 0.636 | 66316 | | 66316-M | |
| 17.0 | 0.674 | 66317 | | 66317-M | |
| 18.0 | 0.714 | 66318 | | 66318-M | |
| 19.0 | 0.754 | 66319 | | 66319-M | |

*Overall Tool Length Tolerances +/- .015

| Metric Hexagonal Rotary/Punch Broaches 8mm – 0.315 Shank | | | | | |
|---|------------------------------|-------------------|-----------------|-----------------------|---------------------------|
| Hex Size (mm) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX |
| 1.3 | 0.050 | 5/64 | 1-1/4 | 662013 | 662013-M |
| 1.5 | 0.061 | 3/32 | | 662015 | 662015-M |
| 2.0 | 0.081 | 9/64 | | 66202 | 66202-M |
| 2.5 | 0.101 | 7/32 | | 662025 | 662025-M |
| 3.0 | 0.120 | 1/4 | | 66203 | 66203-M |
| 3.5 | 0.139 | 1/4 | | 662035 | 662035-M |
| 4.0 | 0.160 | 5/16 | | 66204 | 66204-M |
| 4.5 | 0.179 | 5/16 | | 662045 | 662045-M |
| 5.0 | 0.199 | 3/8 | | 66205 | 66205-M |
| 6.0 | 0.238 | 7/16 | | 66206 | 66206-M |
| 7.0 | 0.278 | 7/16 | | 66207 | 66207-M |
| 8.0 | 0.319 | 7/16 | | 66208 | 66208-M |
| 9.0 | 0.358 | 7/16 | | 66209 | 66209-M |
| 10.0 | 0.399 | 1/2 | | 66210 | 66210-M |
| 11.0 | 0.437 | 1/2 | 66211 | 66211-M | |
| 12.0 | 0.476 | 1/2 | 66212 | 66212-M | |

| Hexagonal Rotary/Punch Broaches 3/4" – 0.750 Shank | | | | | |
|---|------------------------------|-------------------|-----------------|-----------------------|---------------------------|
| Hex Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX |
| 3/8 | 0.379 | 3/4 | 2-3/4 | 66524 | 66524-M |
| 7/16 | 0.442 | | | 66528 | 66528-M |
| 1/2 | 0.505 | 3/4 | | 66532 | 66532-M |
| 9/16 | 0.567 | 7/8 | | 66536 | 66536-M |
| 5/8 | 0.631 | | | 66540 | 66540-M |
| 3/4 | 0.754 | | | 66548 | 66548-M |
| 7/8 | 0.883 | | 66556 | 66556-M | |
| 1.0 | 1.014 | | 66564 | 66564-M | |

The practical forming length of rotary punch broaching is usually up to 1-1/2 times the size of the broach (measured across flats).

Hassay Savage Rotary Broaching

Square Rotary Punch Broaches

1/16 thru 3/8 inch

1.5mm thru 12mm

Material: **M-2 HSS** for mild steel applications,
MAX Alloy available for more difficult to machine alloys

Square Rotary/Punch Broaches 8mm-.315 Shank

| Square Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX* |
|--------------------|------------------------------|-------------------|-----------------|-----------------------|----------------------------|
| 1/16 | 0.063 | 3/16 | 1-1/4 | 68004 | 68004-M |
| 3/32 | 0.095 | 3/16 | | 68006 | 68006-M |
| 1/8 | 0.127 | 7/32 | | 68008 | 68008-M |
| 5/32 | 0.158 | 9/32 | | 68010 | 68010-M |
| 3/16 | 0.190 | 11/32 | | 68012 | 68012-M |
| 7/32 | 0.221 | 3/8 | | 68014 | 68014-M |
| 1/4 | 0.252 | 3/8 | | 68016 | 68016-M |
| 9/32 | 0.284 | | | 68018 | 68018-M |
| 5/16 | 0.315 | | | 68020 | 68020-M |
| 11/32 | 0.346 | | | 68022 | 68022-M |
| 3/8 | 0.379 | | 68024 | 68024-M | |

Metric Square Rotary/Punch Broaches 8mm-.315 Shank

| Square Size (mm) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX* |
|------------------|------------------------------|-------------------|-----------------|-----------------------|----------------------------|
| 1.5 | 0.0605 | 5/32 | 1-1/4 | 682015 | 682015-M |
| 2.0 | 0.0805 | 5/32 | | 68202 | 68202-M |
| 2.5 | 0.101 | 3/16 | | 682025 | 682025-M |
| 3.0 | 0.120 | 7/32 | | 68203 | 68203-M |
| 3.5 | 0.139 | | | 682035 | 682035-M |
| 4.0 | 0.160 | 5/16 | | 68204 | 68204-M |
| 4.5 | 0.179 | | | 682045 | 682045-M |
| 5.0 | 0.199 | 3/8 | | 68205 | 68205-M |
| 6.0 | 0.238 | | | 68206 | 68206-M |
| 7.0 | 0.278 | | | 68207 | 68207-M |
| 8.0 | 0.319 | | 68208 | 68208-M | |
| 9.0 | 0.358 | | 1/2 | 68209 | 68209-M |
| 10.0 | 0.398 | 68210 | | 68210-M | |



Use With:

- Screw Machines
- CNC Machines

The practical forming length of rotary punch broaching is usually up to 1-1/2 times the size of the broach (measured across flats).

HassayMAX

Square Rotary/Punch Broaches 1/2-.500 Shank

| Square Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX* |
|--------------------|------------------------------|-------------------|-----------------|-----------------------|----------------------------|
| 3/32 | 0.095 | 3/16 | 1-3/4 | 68106 | 68106-M |
| 1/8 | 0.127 | 7/32 | | 68108 | 68108-M |
| 5/32 | 0.158 | 9/32 | | 68110 | 68110-M |
| 3/16 | 0.190 | 5/16 | | 68112 | 68112-M |
| 7/32 | 0.221 | 3/8 | | 68114 | 68114-M |
| 1/4 | 0.252 | 7/16 | | 68116 | 68116-M |
| 9/32 | 0.284 | 1/2 | | 68118 | 68118-M |
| 5/16 | 0.315 | 9/16 | | 68120 | 68120-M |
| 11/32 | 0.346 | 5/8 | | 68122 | 68122-M |
| 3/8 | 0.378 | 5/8 | | 68124 | 68124-M |
| 7/16 | 0.441 | | | 68128 | 68128-M |
| 1/2 | 0.504 | | | 68132 | 68132-M |
| 9/16 | 0.567 | | | 3/4 | 68136 |
| 5/8 | 0.630 | 7/8 | | 68140 | 68140-M |

Square Rotary/Punch Broaches 3/4-.750 Shank

| Square Size (inch) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX* |
|--------------------|------------------------------|-------------------|-----------------|-----------------------|----------------------------|
| 1/2 | 0.504 | 11/16 | 2-3/4 | 68532 | 68532-M |
| 9/16 | 0.567 | 7/8 | | 68536 | 68536-M |
| 5/8 | 0.630 | | | 68540 | 68540-M |
| 3/4 | 0.755 | 7/8 | | 68548 | 68548-M |

Metric Square Rotary/Punch Broaches 1/2-.500 Shank

| Square Size (mm) | Across Flats +0.001 / -0.000 | Max. Depth of Cut | Overall Length* | EDP No. Hassay Savage | EDP No. Hassay Savage MAX* |
|------------------|------------------------------|-------------------|-----------------|-----------------------|----------------------------|
| 1.5 | 0.0605 | 1/8 | 1-3/4 | 683015 | 683015-M |
| 2.0 | 0.0805 | 5/32 | | 68302 | 68302-M |
| 2.5 | 0.101 | 3/16 | | 683025 | 683025-M |
| 3.0 | 0.120 | 1/4 | | 68303 | 68303-M |
| 3.5 | 0.139 | 9/32 | | 683035 | 683035-M |
| 4.0 | 0.160 | 5/16 | | 68304 | 68304-M |
| 4.5 | 0.179 | 11/32 | | 683045 | 683045-M |
| 5.0 | 0.199 | 3/8 | | 68305 | 68305-M |
| 6.0 | 0.238 | 13/32 | | 68306 | 68306-M |
| 7.0 | 0.278 | 7/16 | | 68307 | 68307-M |
| 8.0 | 0.319 | | | 68308 | 68308-M |
| 9.0 | 0.358 | | | 68309 | 68309-M |
| 10.0 | 0.398 | 1/2 | | 68310 | 68310-M |
| 11.0 | 0.437 | 9/16 | | 68311 | 68311-M |
| 12.0 | 0.476 | 5/8 | | 68312 | 68312-M |

*Overall Tool Length Tolerances +/- 0.015

SPECIAL ORDERS: We are fully equipped to manufacture Square Rotary Punch Broaches not listed above. Please contact Pilot Precision Products for details.

Hassay Savage Rotary Broaching

Rotary Broaching Set-Up Plugs

Standard plugs - for hex broach set-up only

Metric Rotary Broaching Set-Up Plugs*

8mm Shank

| Size | Plug Dia. -0.001 - inch | Shank Dia. -0.013 - mm | Depth of Plug (inch) | OAL Overall Length (inch) | EDP No. Hassay Savage |
|------|----------------------------|---------------------------|-------------------------|------------------------------|--------------------------|
| 1/8 | 0.129 | 8 mm | 5/16 | 1-1/4 | 67008 |
| 3/16 | 0.193 | | | | 67012 |
| 1/4 | 0.257 | | | | 67016 |
| 5/16 | 0.321 | | 3/8 | | 67020 |
| 3/8 | 0.387 | | 1/2 | | 67024 |
| 1/2 | 0.515 | | | | 67032 |

We can also supply you with custom turned diameters for your exact drill and bore size when repeatable set-ups are required for your job on a continuous basis, for both hex and square applications.

These will all come with the standard lengths and shank diameters of: 8mm, .500 and .750.



Standard Rotary Broaching Set-Up Plugs*

1/2 Inch Shank

| Size | Plug Dia. -0.001 - inch | Shank Dia. -0.0005 - inch | Depth of Plug (inch) | OAL Overall Length (inch) | EDP No. Hassay Savage |
|------|----------------------------|------------------------------|-------------------------|------------------------------|--------------------------|
| 3/16 | 0.193 | 0.500 | 5/16 | 1-3/4 | 67112 |
| 1/4 | 0.257 | | | | 67116 |
| 3/8 | 0.387 | | | | 67124 |
| 1/2 | 0.515 | | 1/2 | | 67132 |
| 5/8 | 0.643 | | | | 67140 |

Standard Rotary Broaching Set-Up Plugs*

3/4 Inch Shank

| Size | Plug Dia. -0.001 - inch | Shank Dia. -0.0005 - inch | Depth of Plug (inch) | OAL Overall Length (inch) | EDP No. Hassay Savage |
|------|----------------------------|------------------------------|-------------------------|------------------------------|--------------------------|
| 3/8 | 0.387 | 0.750 | 1/2 | 2-3/4 | 67524 |
| 1/2 | 0.515 | | | | 67532 |
| 5/8 | 0.643 | | 3/4 | | 67540 |
| 3/4 | 0.771 | | | | 67548 |

*Stock inventories are standard diameter gauge-plugs with specifications to use in standard holders.

Swiss Style Rotary Punch Broaches

28mm OAL

For use with M2 and MAX Alloy - Medical, Dental & Aerospace

- Consistent High-Tolerance Forms for Long Production Runs
- Superb Surface Finishes
- Outstanding Tool Life in Stainless & Titanium
- Special Sizes, Special Tolerances in Less Than 5 Days



M-2 for use with mild steel (HSS)

HassayMAX

for use with stainless, titanium & other high alloy steel

Standard Hexagonal Rotary/Punch Broaches

0.315 Shank

| Hex Size (inch) | Across Flats +/- 0.0002 | Max. Depth of Cut | OAL Overall Length | EDP No. M-2* Hassay Savage | EDP No. Hassay MAX Hassay Savage |
|--------------------|----------------------------|----------------------|-----------------------|-------------------------------|-------------------------------------|
| 0.051 | 0.051 | 1/8 | 28mm | 76002 | 77002-M |
| 1/16 | 0.0645 | 3/16 | | 76004 | 77004-M |
| 5/64 | 0.0801 | 3/16 | | 76005 | 77005-M |
| 3/32 | 0.0958 | 7/32 | | 76006 | 77006-M |
| 7/64 | 0.1113 | 7/32 | | 76007 | 77007-M |
| 1/8 | 0.1270 | 1/4 | | 76008 | 77008-M |
| 9/64 | 0.1426 | 9/32 | | 76009 | 77009-M |
| 5/32 | 0.1585 | 5/16 | | 76010 | 77010-M |
| 3/16 | 0.1895 | 11/32 | | 76012 | 77012-M |
| 7/32 | 0.2207 | 13/32 | | 76014 | 77014-M |
| 1/4 | 0.2520 | 7/16 | | 76016 | 77016-M |

Metric Hexagonal Rotary/Punch Broaches

0.315 Shank

| Hex Size (mm) | Across Flats +/- 0.0002 | Max. Depth of Cut | OAL Overall Length | EDP No. M-2* Hassay Savage | EDP No. Hassay MAX Hassay Savage |
|------------------|----------------------------|----------------------|-----------------------|-------------------------------|-------------------------------------|
| 1.5 | 0.0610 | 5/32 | 28mm | 762015 | 772015-M |
| 2.0 | 0.0807 | 7/32 | | 76202 | 77202-M |
| 2.5 | 0.1004 | | | 762025 | 772025-M |
| 3.0 | 0.1201 | 1/4 | | 76203 | 77203-M |
| 3.5 | 0.1398 | | | 762035 | 772035-M |
| 4.0 | 0.1595 | 5/16 | | 76204 | 77204-M |
| 4.5 | 0.1792 | | | 762045 | 772045-M |
| 5.0 | 0.1989 | 3/8 | | 76205 | 77205-M |
| 6.0 | 0.2382 | 7/16 | | 76206 | 77206-M |

This Swiss Style Tooling Designed for Holders on Page 70

SPECIAL ORDERS: We are fully equipped to manufacture custom turned diameters for your exact drill and bore size when repeatable set-ups are required for your job on a continuous basis, for both hex and square applications.

These will all come with the standard lengths and shank diameters of: 8mm, 0.500 and 0.750. Please contact Pilot Precision Products for details.


Hassay Savage Rotary Broaching

Index Broaching


Hex and Hexalobe



An Alternative To Full Form Rotary Broaching




Single Point
Hex Broach




Single Point
Square Form




2 Point Hex
Index Broach




4 Point Index
Hex Broach



Full 6 Point
Hex Form




Full 4 Point
Hex Form



Full 6 Lobe
Form



2 Index Lobe
Broach



Keyway Shaper

Required Tooling Includes:

- 90° Spot/Chamfer Tool
- Desired Pilot Drill
- Index Punch Broach

Typical Applications Include:

- Hexagonal
- Double Hexagonal
- 6 Lobe / Hexalobe
- Square
- Keyways / Slots / Splines

Index Broaches can be made in the NEW MAX Alloy

HassayMAX

2 or 4 Point Hex Broach Cutting Process

- Hole preparation completed with chamfer & proper pilot hole size
- Machine spindle locked
- Punch enters the work piece, cutting the work piece, then retracts.
- The machine spindle indexes 60° then locks
- The punch enters the work piece a second time, cutting the work piece, then retracts
- Machine spindle indexes 60° then locks
- Punch enters for a third and final imprint
- Drill or boring bar used to make pilot hole can re-enter cut and remove ribbons and chips formed inside the cut



Hex or
Square
Broach


2 Point Hex Broach Cutting Procedure is effective for broaching materials with higher tensile strength and relieves overall pressure during the process.



4 Point Hex Broach Cutting Procedure is effective for index broaching titanium and stainless steel materials to help improve better tolerances and surface finishes in the finished part.



6 Lobe Hexalobe Broach Cutting Procedures are similar procedures as 2 point or 4 point broach cutting. The process reduces overall pressure, improves tolerances and surface finishes. Ideal for automated production.

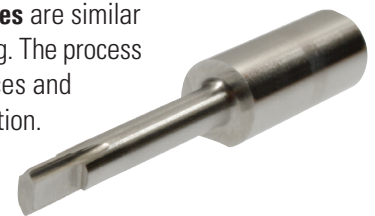

Why Hassay Savage Index Broaches?

- For Longer Production Runs
- Superb Surface Finishes
- Outstanding Tool Life in Stainless & Titanium
- Special Sizes, Special tolerances in Less Than 5 Days
- Produce bone screws to ± 0.0002 Tolerance



Adjustable Rotary Broach Holders

Accepts a variety of shapes, such as internal hex & square rotary broaches

Rotary Broach Holders

Use on any type CNC, manual turning, milling or screw machine.

Holders and broaches are sold separately and available from stock for immediate delivery.

For optimal tool life in large production settings these broaches should be used with Rotary Broach Holders.

- The holder has an internal live spindle, which holds the cutting broach tool.
- The centerline of the cutting tool is offset at 1° from the centerline of the work piece.
- This 1° offset causes the broach to wobble, creating a shearing effect as the broach is advanced into the work piece.




Diagram A
Broaching a Rotating Work Piece

In a turning or screw machine, the holder is mounted stationary while its internal live spindle and the broach rotates after contact with the rotating work piece. At the appropriate feed, the workpiece is sheared by the pressure of the broach through a wobbling type action producing the polygon shape desired.




Diagram B
Broaching a Stationary Work Piece

In a vertical milling or drilling machine, the holder is mounted into and rotates with the machine spindle while its internal live spindle along with the broach remains stationary upon contact with the stationary work piece. While the machine spindle is rotating, the broach's pressure shears the polygon shape into the work piece with a wobbling type action.

Adjustable Rotary Broach Holders

Use with 8mm – 0.315 Broach Shank Diameters

| Overall Length (inch) | Holder Shank Diameter | Holder Shank Length | Broach Shank Depth | EDP No. Hassay Savage |
|-----------------------|-----------------------|---------------------|--------------------|-----------------------|
| 3-27/64 | 5/8 | 1-1/2 | 9/16 | P-67040 |
| 3-59/64 | 3/4 | 2 | | P-67048S |

Adjustable Rotary Broach Holders

Use with 1/2 – 0.500 Broach Shank Diameters

| Overall Length (inch) | Holder Shank Diameter | Holder Shank Length | Broach Shank Depth | EDP No. Hassay Savage |
|-----------------------|-----------------------|---------------------|--------------------|-----------------------|
| 4-17/32 | 3/4 | 2 | 0.742 | P-67048 |
| | 1 | | | P-67064 |
| 5-17/32 | 1-1/4 | 3 | | P-67068 |
| | 1-1/2 | | | P-67072 |

Heavy Duty Adjustable Rotary Broach Holders

Use with 3/4 – 0.750 Broach Shank Diameter

| Overall Length (inch) | Holder Shank Diameter | Holder Shank Length | Broach Shank Depth | EDP No. Hassay Savage |
|-----------------------|-----------------------|---------------------|--------------------|-----------------------|
| 7-9/16 | 1-1/2 | 3 | 1.25 | P-67072HDS |
| | 1-3/4 | | | P-67076HD |



Hassay Savage Internal Rotary Tool Holder Set-Up Procedure

1. Place the Rotary Tool Holder in the Turret (Lathe) or Tool Holder (Milling) depending on the application which fits your needs.
2. Mount the Set Up Plug or Punch Broach in the spindle of the Rotary Tool Holder and take care that the Plug or Punch is bottomed out in the spindle before tightening the set screw on the Holder's Spindle.
3. Drill and Ream a hole to the proper diameter (0.001 larger) for the Set Up Plug in a piece of raw material with a lead chamfer 0.010-0.015 larger than the cross points dimension of the Punch being used. If using the Punch Broach for centering, drill and ream the hole to the diameter of the cross point's dimension.
4. Loosen the 2 cap screws 2-3 turns on the face to generate 3/16 space between the flange portion of the Holder so that it is easily movable in the cup of your hand.
5. Advance the Rotary Tool Holder with the inserted Plug or Punch to 0.030 away from the part while holding the holder flush against the flange.
6. By hand, insert the Plug or Punch into the reamed hole.
7. Advance the turret or tool holder until the holder and tool is fully engaged in the hole.
8. With the Plug or Punch still engaged in the hole, rotate the broach by hand in the hole while tightening the 2 cap screws.
9. Retract the turret or tool holder out of the reamed hole.
10. Remove the set up plug (if using one) and replace with the Punch Broach making sure the Punch Broach is bottomed out in the holder the same as in step 2.
11. See Next Page for Set-Up Plugs.

Hassay Savage Rotary Broaching

Swiss-Style Non-Adjustable Holders

High performance results, quality, and consistent tool life that keeps machines running longer

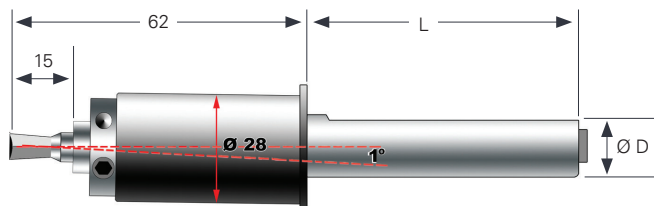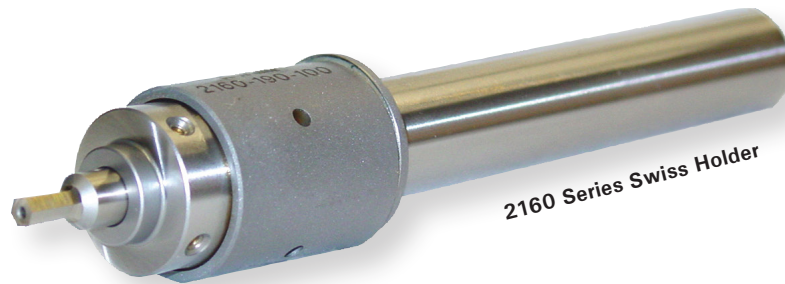

Swiss Style Holders

- No center indicating required – self-centering
- Smaller head diameter eliminates interference on tool blocks
- Longer shank can be cut to proper length
- Short head length for limited back work space
- Built in wobble cutting feature 1° angle
- Heavy duty bearing takes 2,250 lbs. Pushing force
- Swiss made quality high-precision
- Fits most swiss type tool blocks & gang machines
- Excellent for aerospace, medical part / bone screw & dental part production applications
- Recommended profile range for this holder series is 0.050" To 0.375"
- Maintenance-free operation

| Swiss Style Holders | | | |
|--|-------|-----------|--------------------------|
| Holds 8mm Shank/Max. Push Force 2,250 lbs. | | | |
| D | L | (inch/mm) | EDP No. Hassay Savage |
| 5/8 | 1-1/2 | inch | HSP-2160-158-038 |
| 3/4 | 4 | | HSP-2160-190-100 |
| 1 | 4-3/4 | | HSP-2160-254-120 |
| 12 | 38 | mm | HSP-2160-120-038 |
| 14 | | | HSP-2160-140-038 |
| 16 | | | HSP-2160-160-038 |
| 20 | 100 | | HSP-2160-200-100 |
| 22 | | | HSP-2160-220-100 |
| 25 | 120 | | HSP-2160-250-120 |

Use Recommendations

Part Preparation

- The diameter of the pre-drilled hole should be larger than the measurement across the flats on the broach.
- Drill the hole 20% deeper than desired depth of cut for chip clearance.
- Countersink with a 90° lead chamfer slightly larger than the largest dimension of the broach face (distance across points) for lead of the broach.

Centering the Broach

The most critical component in running these tools is having the broach centered as close as possible to the centerline of the work piece. Improper centering will cause uneven hole configurations, oversize holes, spiraling, and excessive cutter/holder wear.


- It is necessary to align the end of the broach tool to the centerline of the work piece diameter by means of adjusting the screws located on the sides of the holder, and the use of set-up plugs.
- Alignment instructions are included with purchase of the tool holder.

Speeds and Feeds

Rotational speed (RPM) has a direct effect on cutting speed and tool life.

- Start at 800 RPM with a feed rate of .016 times the size of the broach in inches for a feed rate in IPR units.

Example: The feed rate for a ¼" rotary punch broach would be
 $0.016 \times .250 = .004/\text{rev.}$

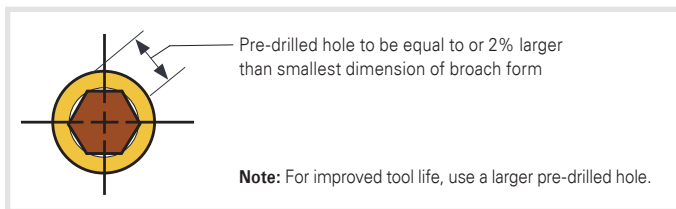


Broach Tool Material

Broaches are customarily manufactured from M-2 high speed steel. This material provides the required edge toughness for standard operations, which do not generate enough heat to effect tool life in machining most metals.

However, for broaching materials such as ductile iron, tool steel, stainless steels, titanium alloys, or nickel-cobalt alloys, a cobalt or MAX Alloy broach would be recommended for optimal tool life. Coatings are also available.

Internal Example

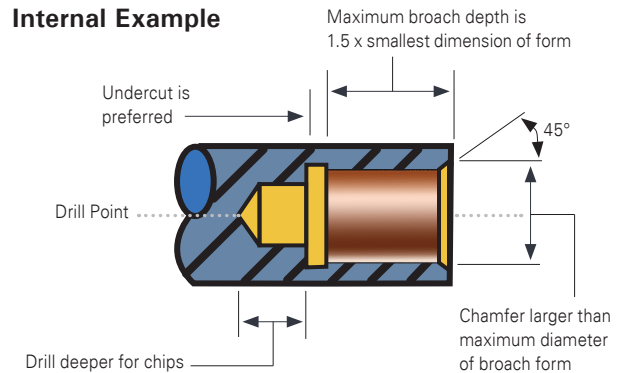

Cutting Principle

- The tool is held at a 1° angle relative to the part centerline.
- The face of the broach tool is the pivot of the 1° angle and is placed on centerline with the part.
- The cutting edge is kept on center and the rest of the tool oscillates around the part centerline with a wobble effect.
- While the faces of the tool and part are at a relative 1° angle, only the leading point of the tool is cutting and not the entire tool profile.
- The wobble effect moves the leading edge to rotate in and out of the cut like a cam.
- It shears the shape into the part with a scalloping effect as it advances forward.
- This reduces the required thrust force up to 80% when it is at the optimum feed.
- Venting can be added to broach to relieve pressure.




Vented Hex Broach

Hole Preparation Examples


Hex:

$B \times 1.02 = \text{Pre-drilled hole, 2\% larger}$
 $s.c.* = B \times 1.1547$



Square:

$B \times 1.10 = \text{Pre-drilled hole, 10\% larger}$
 $s.c.* = B \times 1.4142$




*s.c. = sharp corners

Hassay Savage Tool Holders

Static Index Punch Broach Holders

These Static Holders can also be used for Full Form Hex Broaches up to 1/4" / 7mm

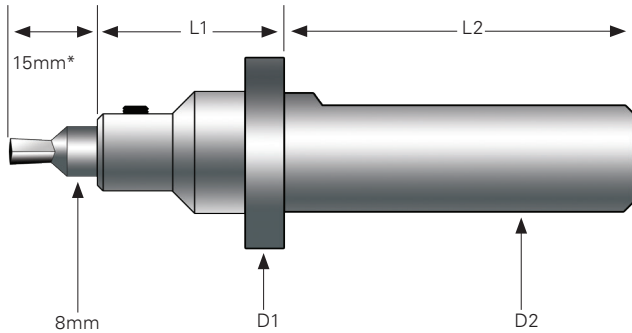


*Only applies when 8mm series broaches are used.

| Punch Holders | | | | |
|---------------|--------|-----------|-----------|-----------------------|
| D1 (inch) | D2 | L1 (inch) | L2 (inch) | EDP No. Hassay Savage |
| 1.00 | 0.625" | 1.25 | 2.5 | HSBH-158250-125-8 |
| | 0.750" | | | HSBH-190250-125-8 |
| | 20mm | | | HSBH-200250-125-8 |
| | 22mm | | | HSBH-220250-125-8 |
| 1.10 | 1.00" | | | HSBH-254250-125-8 |


Quick Change ER Collet Punch & Index Broach ER Holder Systems

For Swiss and CNC Machining


When orientation and concentricity of an internal polygon profile is crucial, an ER holder can be used to securely hold a punch or index broach tool and accurately align the tool to center, while ensuring perfect alignment of the profile orientation. **These Quick Change Holders can be preset and reloaded in seconds.**

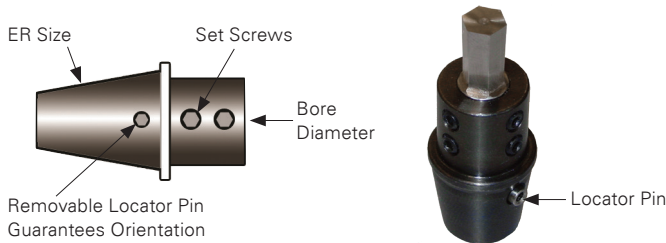

| Punch Broach / Boring Adapters & Nuts | | | |
|---------------------------------------|-----------|-----------------------------|-----------------------|
| ER Size | Bore Dia. | Nut Thread | EDP No. Hassay Savage |
| ER16 | 0.250" | M19 x 1mm Nut & Locator Pin | HSP-PA16-25001 |
| | 8mm | | HSP-PA16-31501 |
| ER20 | 0.250" | M24 x 1mm Nut & Locator Pin | HSP-PA20-25001 |
| | 8mm | | HSP-PA20-31501 |

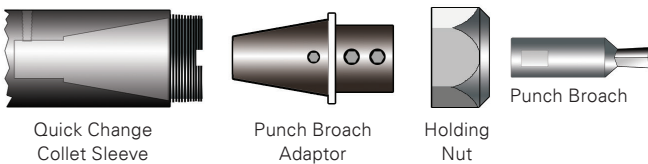




| Quick Change Collet Sleeves For Shank Only Holders | | | | |
|---|--------|------|-------|-----------------------|
| ER Size | D1 | L1 | OAI | EDP No. Hassay Savage |
| ER16 | 0.500" | 1.1" | 4.5" | HSP-CS16-160500 |
| | 0.625" | | | HSP-CS16-160625 |
| | 0.750" | | | HSP-CS16-160750 |
| | 20mm | 28mm | 71mm | HSP-CS16-160787 |
| | 22mm | | 118mm | HSP-CS16-160866 |
| | 25mm | | 95mm | HSP-CS16-160984 |
| | 1" | 1.1" | 4.5" | HSP-CS16-161000 |
| ER20 | 0.750" | 1.2" | | HSP-CS20-200750 |
| | 22mm | 30mm | 114mm | HSP-CS20-200866 |
| | 1.00" | 1.2" | 4.5" | HSP-CS20-201000 |
| | 1.250" | | | HSP-CS20-201250 |
| | 32mm | | | HSP-CS20-201260 |

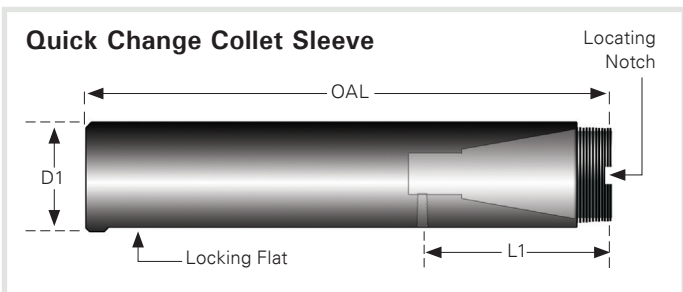

Ultra-Precision Floating Reamer Holders

Complete Orbital Float for True Alignment

Designed with "True Orbital Float" capability, the micro reamer holder aligns the reamer perfectly to the drilled hole, enabling better size control, reduces "bell-mouthing" and increases tool life.

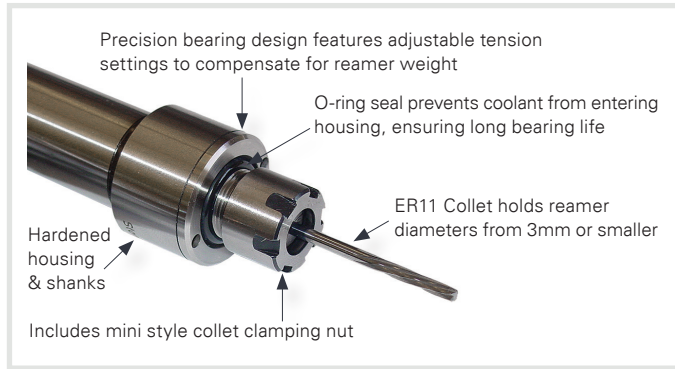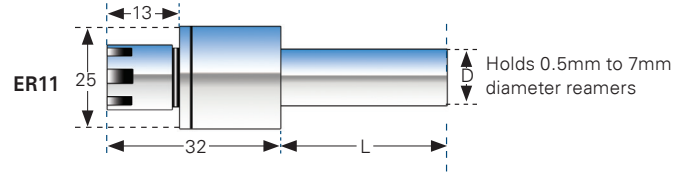

ER11 Floating Reamer Holder w/ Mini-nut Assembly

| Item No. | D | L |
|----------------|-------|-------|
| HSP-11-010-042 | 10mm | 42.00 |
| HSP-11-090-042 | 3/4 " | 2.75" |
| HSP-11-200-042 | 20mm | 41.50 |
| HSP-11-220-042 | 22mm | 41.50 |

Accessory Components

| Item No. | Description |
|---------------|------------------|
| HSP-04621 | ER11 Mini Wrench |
| HSP-ER-11-MNS | ER11 Mini Nut |




| Collet Sets | |
|-----------------|--|
| Item No. | Description |
| HSP-11R-S7-ISP | 7pc ER11 Inch bore Collet Set Size Range 1/16, 3/32, 1/8, 5/32, 3/16, 7/32, 1/4" |
| HSP-11R-S13-MSP | 13pc ER11 Metric Bore Collet Set Size Range .5-7mm in .5mm increments |
| HSP-11R-S13-MUP | 13pc ULTRA PRECISION Metric Bore Collet Set (0.0002" TIR) Size Range 0.5-7mm in 0.5mm increments |

Advanced Precision Micro Tool Holders

Extreme Concentricity for Micro Drills TIR < .0002"

- High performance
- Tight tolerance
- Micro parts production

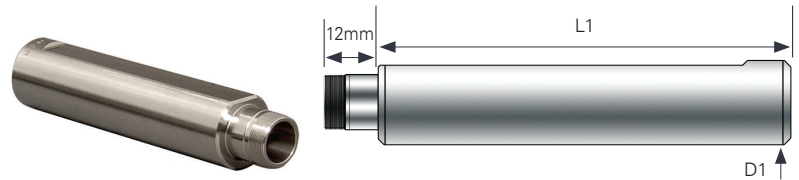

| Precision CHK Collets | |
|-----------------------|------------------|
| Item No. | Description |
| HSP-CHK-1.0 | 1.0mm CHK Collet |
| HSP-CHK-1.5 | 1.5mm CHK Collet |
| HSP-CHK-2.0 | 2.0mm CHK Collet |
| HSP-CHK-2.5 | 2.5mm CHK Collet |
| HSP-CHK-3.0 | 3.0mm CHK Collet |
| HSP-CHK-3.5 | 3.5mm CHK Collet |



| Collet Sleeves | | | | |
|-----------------|----------------------------------|--------|---------|----------|
| Item No. | Description | D1 | L1 (mm) | OAL (mm) |
| HSP-CHK-127-026 | CHK Collet Sleeve 1/2 inch Shank | 0.500" | 26mm | 38mm |
| HSP-CHK-190-076 | CHK Collet Sleeve 3/4 inch Shank | 0.750" | 76mm | 90mm |
| HSP-CHK-254-121 | CHK Collet Sleeve 1 inch Shank | 1.00" | 121mm | 133mm |


Note: Includes Clamping Nut and Wrench

| Accessory Components | |
|----------------------|-----------------------------------|
| Item No. | Description |
| HSP-CHK - NUT | Precision CHK Collet Clamping Nut |
| HSP-CHK 14mm | 14mm Flat Wrench |




Hassay Savage Tool Holders

Micro-XL Tool Holders - Micro End Mill Extensions **NEW for 2022**

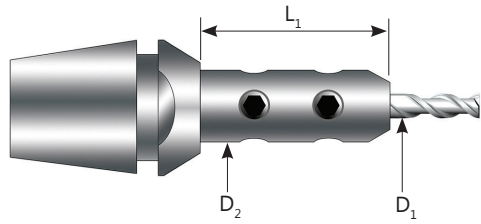

Pair the bore size (D1) to the shank size of the high-quality micro end mill of your choice for maximum reach and rigidity.

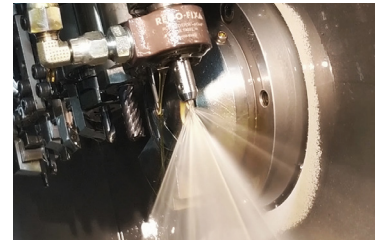

ER8

| Item No. | Description | L1 | D1 | D2 |
|-------------|--------------------|----|-------|-----|
| 4900-110100 | CTE-08-1.00-064100 | 10 | 1 | 6.4 |
| 4900-110150 | CTE-08-1.50-064100 | | 1.5 | 6.4 |
| 4900-110159 | CTE-08-1.59-064100 | | .062" | 6.4 |
| 4900-110200 | CTE-08-2.00-064100 | | 2 | 6.4 |
| 4900-110300 | CTE-08-3.00-070100 | | 3 | 7 |
| 4900-110318 | CTE-08-3.18-070100 | | .125" | 7 |
| 4900-115100 | CTE-08-1.00-064150 | 15 | 1 | 6.4 |
| 4900-115150 | CTE-08-1.50-064150 | | 1.5 | 6.4 |
| 4900-115300 | CTE-08-3.00-070150 | | 3 | 7 |
| 4900-115318 | CTE-08-3.18-070150 | | .125" | 7 |

NOTE: ER8 Holders Include a special M10x.75 clamping nut.

ER11

| Item No. | Description | L1 | D1 | D2 |
|-------------|--------------------|----|-------|-----|
| 4900-210100 | CTE-11-1.00-064100 | 10 | 1 | 6.4 |
| 4900-210150 | CTE-11-1.50-064100 | | 1.5 | 6.4 |
| 4900-210159 | CTE-11-1.59-064100 | | .062" | 6.4 |
| 4900-210200 | CTE-11-2.00-064100 | | 2 | 6.4 |
| 4900-210300 | CTE-11-3.00-080100 | | 3 | 8 |
| 4900-210318 | CTE-11-3.18-080100 | | .125" | 8 |
| 4900-215300 | CTE-11-3.00-080150 | 15 | 3 | 8 |
| 4900-215318 | CTE-11-3.18-080150 | | .125" | 8 |
| 4900-215400 | CTE-11-4.00-080150 | | 4 | 8 |
| 4900-220300 | CTE-11-3.00-080200 | | 3 | 8 |
| 4900-220318 | CTE-11-3.18-080200 | 20 | .125" | 8 |
| 4900-220400 | CTE-11-4.00-080200 | | 4 | 8 |

ER16

| Item No. | Description | L1 | D1 | D2 |
|----------------|---------------------|-------|-------|-----|
| 4900-316100 | CTE-16-1.00-064160 | 16 | 1 | 6.4 |
| 4900-316150 | CTE-16-1.50-064160 | | 1.5 | 6.4 |
| 4900-316159 | CTE-16-1.59-064160 | | .062" | 6.4 |
| 4900-316200 | CTE-16-2.00-064160 | | 2 | 6.4 |
| 4900-316300 | CTE-16-3.00-095160 | | 3 | 9.5 |
| 4900-316318 | CTE-16-3.18-095160 | | .125" | 9.5 |
| 4900-316400 | CTE-16-4.00-095160 | | 4 | 9.5 |
| 4900-316476 | CTE-16-4.76-095160 | | .187" | 9.5 |
| 4900-316500 | CTE-16-5.00-095160 | | 5 | 9.5 |
| 4900-325300 | CTE-16-3.00-095250 | | 25 | 3 |
| * 4900-325300C | CTE-16-3.00-095250C | 3 | | 9.5 |
| * 4900-325318 | CTE-16-3.18-095250 | .125" | | 9.5 |
| * 4900-325318C | CTE-16-3.18-095250C | .125" | | 9.5 |
| 4900-325400 | CTE-16-4.00-095250 | 4 | | 9.5 |
| 4900-325476 | CTE-16-4.76-095250 | .187" | | 9.5 |
| 4900-325500 | CTE-16-5.00-095250 | 5 | | 9.5 |

* Coolant-Thru Version

ER20

| Item No. | Description | L1 | D1 | D2 |
|-------------|--------------------|-------|-------|-------|
| 4900-414300 | CTE-20-3.00-095140 | 14 | 3 | 9.5 |
| 4900-414476 | CTE-20-4.76-114140 | | .187" | 11.4 |
| 4900-414500 | CTE-20-5.00-114140 | | 5 | 11.4 |
| 4900-414600 | CTE-20-6.00-125140 | | 6 | 12.5 |
| 4900-414635 | CTE-20-6.35-125140 | | .250" | 12.5 |
| 4900-416318 | CTE-20-3.18-095160 | | 16 | .125" |
| 4900-416400 | CTE-20-4.00-095160 | 4 | | 9.5 |
| 4900-416476 | CTE-20-4.76-114160 | .187" | | 11.4 |
| 4900-425300 | CTE-20-3.00-095250 | 3 | | 9.5 |
| 4900-425318 | CTE-20-3.18-095250 | 25 | .125" | 9.5 |
| 4900-425400 | CTE-20-4.00-095250 | | 4 | 9.5 |
| 4900-425476 | CTE-20-4.76-114250 | | .187" | 11.4 |
| 4900-425500 | CTE-20-5.00-114250 | | 5 | 11.4 |
| 4900-425600 | CTE-20-6.00-125250 | | 6 | 12.5 |
| 4900-425635 | CTE-20-6.35-125250 | | .250" | 12.5 |

Collet Reduction

NOW AVAILABLE!

| Item No. | Description | Shank Size | Collet Size | Extension Length |
|------------------|------------------|------------|-------------|------------------|
| Call For Details | RTE-16-08-100254 | ER16 | ER8 | 1.0 in |

Replacement Stop Screws

| Item No. | Size | Fits |
|-------------|------|-----------|
| 8999-000021 | M6 | ER11 |
| 8999-000206 | M8 | ER16 & 20 |
| 8999-000210 | M10 | ER25 |



Replacement Set Screws

| Item No. | Size |
|-------------|------|
| 8999-000011 | M3 |
| 8999-000007 | M4 |
| 8999-000214 | M5 |





High-Performance
Round Cutting Tools

PILLOT

Table of Contents

| | |
|--|----------------|
| Introduction | 77 |
| Index | 78 |
| Centering – Spotting – Combined Machining | |
| Plain Type 60° HSS & Cobalt Center Drills | 79 |
| ASA Carbide 60°, 82°, 90° HSS Long Center Drills | 80 |
| Radius Type, Form R HSS Center Drills | 81 |
| Bell Type HSS Center Drills | 81 |
| Unique Center Drills with Reinforcing Bulge, Form W | 82 |
| Metric Center Drills | 83-85 |
| Short & Long NC Spotting Drills, Angle 90°, 118°, 120° | 86 |
| NC Spotting Drills, Angle 60°, 90°, 120° | 87 |
| NC Spotting Drills, Angle 90°, 120°, 142° | 88 |
| duoMAG Double Ended NC Spotting Drills | 89 |
| Multi-Function Tools | |
| Micro & Multi-Function Tools “Multi-V” Carbide 40° & 60° | 90 |
| Multi-V Carbide 90°, 100° & 120° | 91 |
| Speeds & Feeds for Multi-V | 92 |
| Bi-Face Chamfering Biconical Cutters | 93 |
| Single Flute/Point Interpolated Thread Milling Cutters | 94 |
| Multi-Function Carbide Miniature Tools | 94 |
| Countersinking | |
| Trident Imperial Three Flute Countersinks Cobalt 30°, 60°, 82°, 90°, 100° & 120° | 95-96 |
| Trident Metric 60° and 82° Three Flute Countersinks | 97 |
| Trident Metric 90° Three Flute Countersinks | 98 |
| Trident Metric 90° Three Flute Countersinks Anti-Vibration | 99 |
| Single Flute Chamfering Cutters Cobalt 60°, 82°, 90°, 100°, 120° | 100-101 |
| 60° & 82° Zero Flute Deburring Tool with Hole | 102 |
| Speeds & Feeds for Deburring, Chamfering & Three Flute Countersinks | 103 |
| Trident Hand Countersinks | 104 |
| Auto Body Drill Bits to Disconnect Spot Welds | 105 |
| High Precision Micro & Miniature Reamers | |
| Reamer Information | 106 |
| Reamer with Coolant thru for Blind Holes | 107 |
| High Precision Carbide Micro-Reamers | 108 |
| High Precision 8600 Miniature Reamers | 109-114 |
| Reamer Formulas for Speeds & Feeds | 115 |
| Reamer Hole Size Chart & 220° Ball-End Miniature End-Mills with Back Clearance | 116 |
| Micro End-mills | |
| High Performance Micro-Milling | 117 |
| Standard & Long Length Miniature End-mills | 118-119 |
| Extra-Long Carbide End-mills & Miniature End-mills with Back Clearance | 120 |
| Microforce Speeds & Feeds for End-mills | 121 |

Custom Solutions Are Standard



Magafor

Magafor is the recognized world leader in the production of precision tools. Pilot is proud to be the exclusive American distributor of such fine products.

Specialization

With more than 250 product groups and over 8,000 standard products, Magafor offers the solution adapted to each of your machining applications. For example, the 0.40mm diameter micro end-mill is available in 26 different lengths and styles. You'd be hard-pressed to find a manufacturer offering more options. Styles, materials and lengths vary within each specific range of tooling to offer you the widest selection.

Innovation

Magafor meets the needs of even the most demanding customers by: detecting customer needs to create new technologies; analyzing and comparing the totality of the special tools; and comparing market trends to create custom solutions.

Trial & Test Standard Tools

Magafor is so confident in the performance and reliability of its products—as are we!—that we'll extend the most liberal trial program in the industry. At your request, we'll provide standard test tools FREE of charge. Contact customer service with any questions and to facilitate this request.

Blanket Orders

Please know that we accept and encourage blanket orders on standard stock items, standard non-stock items and custom items. We will always ensure continuous delivery with large safety stock levels.

Specials

Magafor excels in manufacturing custom tooling and delivering solutions that show cost savings in most applications.

Coatings

In addition to Futura and TiN coatings, three new "X" coatings, sprung from multi-layer nano technology are available:

Red'X:

Cobalt tool coating has a higher hardness of (3700 HV) and is similar to TiAlN in a multi-layer coating. Choose this coating for dry machining. Using coolant will add lubricity.

Hard'X:

Carbide tool coating has a high hardness (3500 HV) and shows a high thermic stability. It offers excellent protection against heat and wear and is ideal for dry-machining high-speed cut-in treated steels and dies up to 67 Rc.

Graph'X:

Diamond coating (8000 HV) is particularly effective when machining graphite, composite materials, plastics with glass-fibers or carbon-fibers.

Note: Vickers Hardness Test

HV = a unit of hardness given by the test known as the Vickers Pyramid Number



Magafor is the only cutting tool manufacturer member of the European Commission that has been chosen to research micro-machining.

This research targets performance improvements of all **Magafor** tools, ensuring customers the greatest profit margins.


| Materials Used in the Manufacture of Our Tools and Coatings Designation | | | |
|---|--------------------------------------|----------|----------|
| Designation | | | |
| Magafor | European | American | Japanese |
| HSS | HSS | M2 | SKH-51 |
| HSS-E COBALT | HSS-E | M35 | SKH-55 |
| HSS-E 8% COBALT | HSS-E8 | M42 | SKH-59 |
| TiN | TiN | TiN | TiN |
| Futura | TiAlN | TiAlN | TiAlN |
| Red'X | TiAlN with higher hardness (3700 HV) | | |
| Hard'X | AlTiN | Latuma | |
| Graph'X | Diamond coating | | |
| K15 CARBIDE — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size) | | | |

Engaged right from the start in the process aspiring to excellence, in addition to our Futura and TiN coatings, Magafor offers three “X” coatings, sprung from multi-layer nano technology.

Red'X Cobalt tool coating has a higher hardness of (3700 HV) and is similar to TiAlN in a multi-layer coating. Choose this coating for dry machining. Using coolant will add lubricity.

Hard'X [For hard milling] carbide tool coating has a high hardness (3500 HV) and shows a high thermic stability. It offers excellent protection against heat and wear and is ideal for dry machining-high speed cut-in treated steels and dies up to 67 HRC.

Graph'X [For composite milling] diamond coating (8000 HV) is particularly effective when machining graphite, composite materials, plastics with glass-fibers or carbon-fibers.

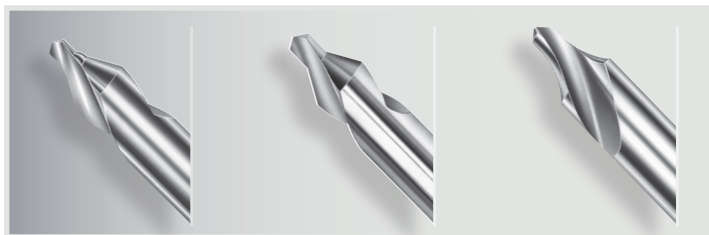


| Hardness and Use for Materials | | | | | | | |
|--------------------------------|--------------|----------------------|------------------|--------------------------|-------------------|---------------|------------------|
| Material | HSS | HSS-Co | HSS-Co + TiN | HSS 8% Co | HSS 8% Co + Red'X | CARBIDE | CARBIDE + Hard'X |
| Hardness | 63 HRC | 65 HRC | 65 HRC + 2300 HV | 67 HRC | 67 HRC + 3500 HV | 1800HV | 1800HV + 3500 |
| Use | Small Series | Production intensive | | Hard and abrasive alloys | | Treated steel | |

Note: Vickers Hardness Test HV = a unit of hardness given by the test known as the Vickers Pyramid Number

EDP Numbering System

EDP # 88860001810 - 1.81 mm
Solid Carbide High Precision
Micro Reamer





- A** = Series # - 8600
Series # 8600 refers to Solid Carbide High Precision Micro Reamers
- B** = Size - 1.81 mm
Size 01810 refers to 1.81 mm

| Series Index | | | | | | | | | |
|--------------|------|-------|------|--------|------|---------|------|--------|------|
| Code | Page | Code | Page | Code | Page | Code | Page | Code | Page |
| 019 | 88 | 202 | 105 | 4835 | 96 | 8197 | 87 | 8527 | 117 |
| 019-L | 89 | 203 | 105 | 4837 | 104 | 8199 | 87 | 8527-H | 117 |
| 0290 | 84 | 2901 | 105 | 4839 | 95 | 8201 | 105 | 8550 | 94 |
| 0811 | 83 | 2903 | 105 | 4933 | 98 | 8203-H | 105 | 8550-H | 94 |
| 08115 | 79 | 43-A | 99 | 4936 | 98 | 8431 | 98 | 8600 | 109 |
| 0890 | 84 | 411 | 102 | 8008-A | 86 | 8431-H | 98 | 8610 | 106 |
| 0895 | 87 | 421 | 100 | 8008-B | 86 | 8431-L | 98 | 8670 | 107 |
| 0896 | 87 | 422 | 101 | 8008-C | 86 | 8432 | 97 | | |
| 0910 | 83 | 423 | 100 | 8008-D | 86 | 8434 | 97 | | |
| 0915 | 79 | 425 | 100 | 8040 | 90 | 845-H | 94 | | |
| 0919 | 89 | 430 | 104 | 8088 | 90 | 8460 | 93 | | |
| 0919-L | 89 | 4303 | 98 | 8088-H | 90 | 8460-H | 93 | | |
| 0995 | 87 | 431 | 98 | 8090 | 91 | 8480 | 93 | | |
| 0996 | 87 | 432 | 95 | 8090-H | 91 | 8480-H | 93 | | |
| 10 | 83 | 433 | 96 | 8092 | 91 | 8490 | 93 | | |
| 105 | 83 | 434 | 95 | 8092-H | 91 | 8490-H | 93 | | |
| 11 | 84 | 435 | 96 | 8095 | 91 | 8500 | 118 | | |
| 1055 | 79 | 436 | 98 | 8095-H | 91 | 8500-G | 118 | | |
| 115 | 79 | 437 | 104 | 8100 | 83 | 8500-H | 118 | | |
| 125 | 81 | 438 | 104 | 8100-H | 83 | 8507 | 120 | | |
| 135 | 81 | 439 | 95 | 8105 | 80 | 8507-H | 120 | | |
| 145 | 82 | 4811 | 102 | 8105-H | 80 | 8507-D | 120 | | |
| 154 | 80 | 4821 | 100 | 8119-A | 86 | 8507-DG | 120 | | |
| 155 | 80 | 4822 | 101 | 8119-B | 86 | 8507-DH | 120 | | |
| 185 | 80 | 4823 | 100 | 8119-C | 86 | 8509 | 119 | | |
| 191 | 87 | 4825 | 100 | 8119-D | 86 | 8509-G | 119 | | |
| 195 | 87 | 483-A | 99 | 8190-H | 86 | 8509-H | 119 | | |
| 196 | 87 | 4831 | 99 | 8195 | 88 | 8510 | 120 | | |
| 197 | 87 | 4832 | 95 | 8195-H | 88 | 8510-G | 120 | | |
| 199 | 87 | 4833 | 96 | 8196 | 88 | 8510-H | 120 | | |
| 201 | 105 | 4834 | 95 | 8196-H | 88 | 8522-H | 116 | | |

Center Drills

Plain Type 60°


Applications: **Centering, Spotting and Combined Machining**

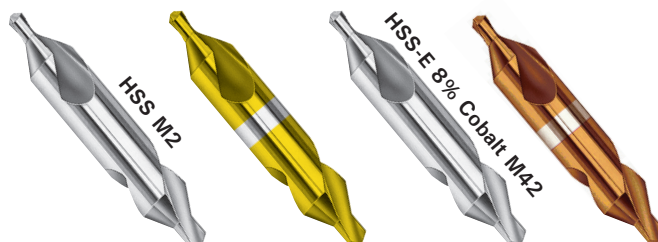

Plain Center Drills - Angle 60°

| Size | D | d | L | / | 115 | M2/TiN 08115 | Cobalt + 1055 | M42/Red'X 0915 |
|-------|------|-------|-------|---------------|--------------|-----------------|------------------|-------------------|
| 00000 | 1/8 | 0.010 | 1-1/4 | 0.008 – 0.018 | 8111500A000* | 800811500A0 | 81105500A00* | 80091500A00* |
| 0000 | | 0.015 | | 0.014 – 0.025 | 8111500B000* | 800811500B0 | 81105500B00* | 80091500B00* |
| 000 | | 0.020 | | 0.020 – 0.032 | 8111500C000 | 800811500C0 | 81105500C00* | 80091500C00* |
| 00 | | 0.025 | | 0.028 – 0.040 | 8111500D000 | 800811500D0 | 81105500D00* | 80091500D00* |
| 0 | | 1/32 | | 0.035 – 0.047 | 8111500E000 | 800811500E0 | 81105500E00* | 80091500E00* |
| 1 | 1/8 | 3/64 | 1-1/4 | 0.055 – 0.067 | 81115010000 | 80081150100 | 81105501000 | 80091501000 |
| 2 | 3/16 | 5/64 | 1-7/8 | 0.095 – 0.106 | 81115020000 | 80081150200 | 81105502000 | 80091502000 |
| 3 | 1/4 | 7/64 | 2 | 0.130 – 0.154 | 81115030000 | 80081150300 | 81105503000 | 80091503000 |
| 4 | 5/16 | 1/8 | 2-1/8 | 0.150 – 0.175 | 81115040000 | 80081150400 | 81105504000 | 80091504000 |
| 4-1/2 | 3/8 | 9/64 | 2-1/2 | 0.170 – 0.193 | 81115045000 | 80081150450 | - | - |
| 5 | 7/16 | 3/16 | 2-3/4 | 0.230 – 0.256 | 81115050000 | 80081150500 | 81105505000 | 80091505000 |
| 6 | 1/2 | 7/32 | 3 | 0.270 – 0.295 | 81115060000 | 80081150600 | 81105506000 | 80091506000 |
| 7 | 5/8 | 1/4 | 3-1/4 | 0.315 – 0.340 | 81115070000 | 80081150700 | 81105507000 | 80091507000 |
| 8 | 3/4 | 5/16 | 3-1/2 | 0.390 – 0.420 | 81115080000 | 80081150800 | 81105508000 | 80091508000 |
| 9 | 7/8 | 11/32 | 3-5/8 | 0.430 – 0.460 | 81115090000 | 80081150900 | - | - |
| 10 | 1 | 3/8 | 3-3/4 | 0.475 – 0.500 | 81115100000 | 80081151000 | - | - |

*Single end tool

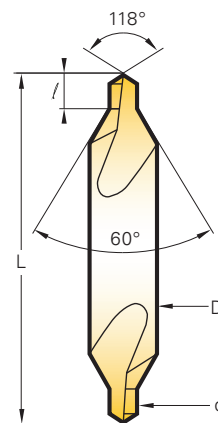

Tolerances

| Tool Diameters | D | d | Angle | |
|----------------|---------|---------|-------|------|
| | | | 60° | 118° |
| .010 – 7/64 | n/a | + .0039 | - | - |
| 1/8 – 7/32 | -0.0007 | + .0047 | - | - |
| 1/4 – 3/8 | -0.0009 | + .0059 | - | - |
| 7/16 – 5/8 | -0.0011 | + .0059 | -30' | ± 2° |
| 3/4 – 1 | -0.0013 | + .0059 | - | - |

Concentricity of Drill Diameter to Body is: +/- .0005 runout



American Standard Value Sets


| Composition Quantity | 15 Pieces HSS 81115000015 | Composition Quantity | HSS 81115000000 | Composition Quantity | 5 Pieces Cobalt 81105500000 |
|----------------------|------------------------------|----------------------|--------------------|----------------------|--------------------------------|
| 3 pieces each | # 1 | 1 piece each | # 1 | 1 piece each | # 1 |
| | # 2 | | # 2 | | # 2 |
| | # 3 | | # 3 | | # 3 |
| | # 4 | | # 4 | | # 4 |
| 2 pieces | # 4-1/2 | | # 5 | | # 5 |
| 1 piece | # 5 | | | | |

Sets also available TiN coated

Center Drills





Plain Type 60°, 82°, 90° and Longs

Applications: **Centering**

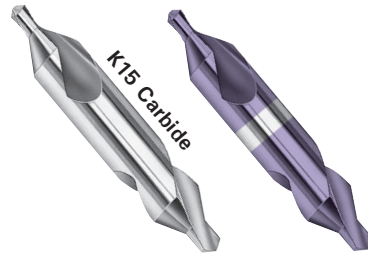

ASA Solid Carbide Plain Center Drills - Angle 60°

| Size | D | d | L | / | K15 Carbide 8105 | Hard'X 8105-H |
|------|------|-------|-------|---------------|------------------|---------------|
| 00 | 1/8 | 0.025 | 1-1/4 | 0.020 – 0.040 | 88810500D00 | 888105H00D0 |
| 0 | 1/8 | 1/32 | 1-1/4 | 0.035 – 0.047 | 88810500E00 | 888105H00E0 |
| 1 | 1/8 | 3/64 | 1-1/4 | 0.055 – 0.067 | 88810501000 | 888105H0100 |
| 2 | 3/16 | 5/64 | 1-7/8 | 0.095 – 0.106 | 88810502000 | 888105H0200 |
| 3 | 1/4 | 7/64 | 2 | 0.130 – 0.154 | 88810503000 | 888105H0300 |
| 4 | 5/16 | 1/8 | 2-1/8 | 0.150 – 0.175 | 88810504000 | 888105H0400 |
| 5 | 7/16 | 3/16 | 2-3/4 | 0.230 – 0.256 | 88810505000 | 888105H0500 |
| 6 | 1/2 | 7/32 | 3 | 0.270 – 0.295 | 88810506000 | 888105H0600 |

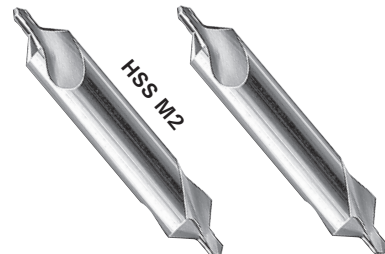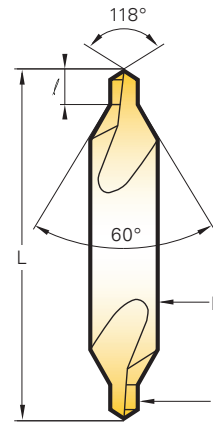

Plain Center Drill - Angles 82° and 90°

| Size | D | d | L | / | Angle 82° 154 | Angle 90° 155 |
|------|------|------|-------|---------------|---------------|---------------|
| 1 | 1/8 | 3/64 | 1-1/4 | 0.055 – 0.067 | 81154010000 | 81155010000 |
| 2 | 3/16 | 5/64 | 1-7/8 | 0.095 – 0.106 | 81154020000 | 81155020000 |
| 3 | 1/4 | 7/64 | 2 | 0.130 – 0.154 | 81154030000 | 81155030000 |
| 4 | 5/16 | 1/8 | 2-1/8 | 0.150 – 0.175 | 81154040000 | 81155040000 |
| 5 | 7/16 | 3/16 | 2-3/4 | 0.230 – 0.256 | 81154050000 | 81155050000 |
| 6 | 1/2 | 7/32 | 3 | 0.270 – 0.295 | 81154060000 | 81155060000 |
| 7 | 5/8 | 1/4 | 3-1/4 | 0.135 – 0.340 | 81154070000 | 81155070000 |
| 8 | 3/4 | 5/16 | 3-1/2 | 0.390 – 0.420 | 81154080000 | 81155080000 |

Longs - Angle 60°

| Size (inch) | D | d | L | HSS M2 185 |
|-------------|------|-------------|---|-------------|
| 1 x 3 | 1/8 | 3/64 | 3 | 81185010300 |
| 1 x 4 | | | 4 | 81185010400 |
| 1 x 5 | | | 5 | 81185010500 |
| 1 x 6 | | | 6 | 81185010600 |
| 2 x 3 | | | 3 | 81185020300 |
| 2 x 4 | 3/16 | 5/64 | 4 | 81185020400 |
| 2 x 5 | | | 5 | 81185020500 |
| 2 x 6 | | | 6 | 81185020600 |
| 3 x 3 | | | 3 | 81185030300 |
| 3 x 4 | | | 4 | 81185030400 |
| 3 x 5 | | | 5 | 81185030500 |
| 3 x 6 | 6 | 81185030600 | | |
| 4 x 3 | 5/16 | 1/8 | 3 | 81185040300 |
| 4 x 4 | | | 4 | 81185040400 |
| 4 x 5 | | | 5 | 81185040500 |
| 4 x 6 | | | 6 | 81185040600 |
| 4-1/2 x 4 | | | 4 | 81185045400 |
| 4-1/2 x 5 | | | 5 | 81185045500 |
| 4-1/2 x 6 | 6 | 81185045600 | | |
| 5 x 4 | 7/16 | 3/16 | 4 | 81185050400 |
| 5 x 5 | | | 5 | 81185050500 |
| 5 x 6 | | | 6 | 81185050600 |
| 6 x 4 | | | 4 | 81185060400 |
| 6 x 5 | | | 5 | 81185060500 |
| 6 x 6 | | | 6 | 81185060600 |
| 7 x 5 | 5/8 | 1/4 | 5 | 81185070500 |
| 7 x 6 | | | 6 | 81185070600 |
| 8 x 6 | | | 6 | 81185080600 |



American Standard Value Sets - Angle 60°

| 5 Pieces / 4" OAL Long | |
|------------------------|--|
| Composition | 81185000000 |
| 1 piece each | # 1 Long # 2 Long # 3 Long # 4 Long # 5 Long |

Center Drills

Radius Type, Form R


Applications: **Centering**



Magafor center drills with radius have a special profile and offer the following benefits over a 60° center drill:

- The radii eliminates the risk of breakage
- They provide an exact bearing
- They serve as a protective chamfer

| Center Drills Radius Type Form R | | | | | | |
|----------------------------------|------|------|-------|-------|---------------|-------------|
| ASA # | D | d | L | R | / | HSS M2 125 |
| 1 - R | 1/8 | 3/64 | 1-1/4 | 0.150 | 0.125 – 0.150 | 81125010000 |
| 2 - R | 3/16 | 5/64 | 1-7/8 | 0.230 | 0.200 – 0.225 | 81125020000 |
| 3 - R | 1/4 | 7/64 | 2 | 0.315 | 0.270 – 0.300 | 81125030000 |
| 4 - R | 5/16 | 1/8 | 2-1/8 | 0.400 | 0.340 – 0.370 | 81125040000 |
| 5 - R | 7/16 | 3/16 | 2-3/4 | 0.500 | 0.480 – 0.510 | 81125050000 |
| 6 - R | 1/2 | 7/32 | 3 | 0.530 | 0.540 – 0.575 | 81125060000 |
| 7 - R | 5/8 | 1/4 | 3-1/4 | 0.700 | 0.660 – 0.700 | 81125070000 |
| 8 - R | 3/4 | 5/16 | 3-1/2 | 0.790 | 0.810 – 0.850 | 81125080000 |

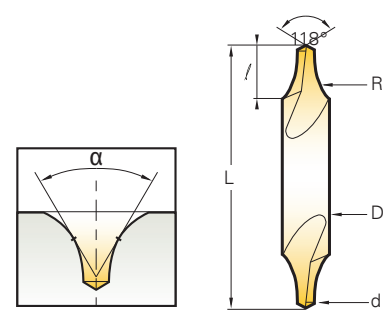

| Tolerances | | | |
|----------------|---------|----------|--------|
| Tool Diameters | D | d | R max |
| .010 – 7/64 | -0.0007 | + 0.0039 | - |
| 1/8 – 7/32 | -0.0007 | + 0.0047 | - |
| 1/4 – 3/8 | -0.0009 | + 0.0059 | 1.25 R |
| 7/16 – 5/8 | -0.0011 | n/a | - |
| 3/4 – 1 | -0.0013 | n/a | - |

| American Form R Standard Sets | |
|-------------------------------|---|
| Composition Quantity | 5 Pieces 81125000000 |
| 1 piece each Radius Type | # 1 - R # 2 - R # 3 - R # 4 - R # 5 - R |




Center Drills

Bell Type, Form B

Center drills with protective chamfer guarantee the center obtained from any risk of blows and deformation. The splay resulting from the protective chamfer makes it easier to load parts between points on machines with automatic feed.

| Bell Type w/Saved Angle Form B | | | | | | |
|--------------------------------|------|------|-------|-------|---------------|-------------|
| Size | D | d | K | L | / | HSS M2 135 |
| 11 | 1/8 | 3/64 | 0.100 | 1-1/4 | 0.055 – 0.070 | 81135110000 |
| 12 | 3/16 | 1/16 | 0.150 | 1-7/8 | 0.707 – 0.090 | 81135120000 |
| 13 | 1/4 | 3/32 | 0.200 | 2 | 0.110 – 0.135 | 81135130000 |
| 14 | 5/16 | 7/64 | 0.250 | 2-1/8 | 0.125 – 0.155 | 81135140000 |
| 15 | 7/16 | 5/32 | 0.350 | 2-3/4 | 0.185 – 0.215 | 81135150000 |
| 16 | 1/2 | 3/16 | 0.400 | 3 | 0.230 – 0.260 | 81135160000 |
| 17 | 5/8 | 7/32 | 0.500 | 3-1/4 | 0.270 – 0.300 | 81135170000 |
| 18 | 3/4 | 1/4 | 0.600 | 3-1/2 | 0.310 – 0.340 | 81135180000 |
| 19 | 7/8 | 5/16 | 0.700 | 3-5/8 | 0.390 – 0.420 | 81135190000 |
| 20 | 1 | 3/8 | 0.800 | 3-3/4 | 0.470 – 0.500 | 81135200000 |

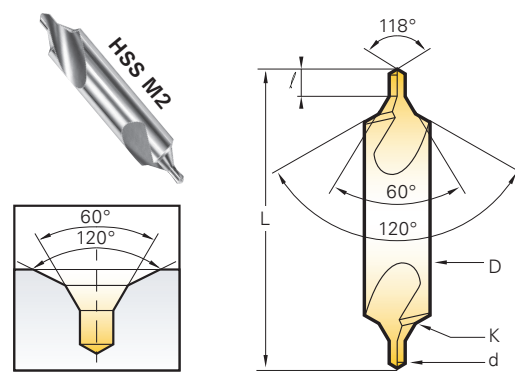

| Tolerances | | | | | |
|----------------|---------|----------|------|------------|------|
| Tool Diameters | D | d | 60° | Angle 118° | 120° |
| .010 – 7/64 | -0.0007 | + 0.0039 | - | - | - |
| 1/8 – 7/32 | -0.0007 | + 0.0047 | - | - | - |
| 1/4 – 3/8 | -0.0009 | + 0.0059 | -30' | ± 2° | -4° |
| 7/16 – 5/8 | -0.0011 | - | - | - | - |
| 3/4 – 1 | -0.0013 | - | - | - | - |

| American Standard Form B Sets | |
|-------------------------------|--------------------------------------|
| Composition Quantity | 81135000000 |
| 1 piece each Bell Type | # 11 # 12 # 13 # 14 # 15 |



Unique Center Drills

With Reinforcing Bulge, Form W



Magafor center drill form W is stronger than the common center drill:



- The bulge reinforces the point
- It increases the chips removal
- It makes the lubrication of the drill easier
- It runs at faster speeds and feeds

Plain Center Drills w/Bulge Form W

| ASA # | D | d | L | / | HSS M2 145 |
|-------|------|------|-------|---------------|-------------|
| 1 - W | 1/8 | 6/64 | 1-1/4 | 0.055 - 0.067 | 81145010000 |
| 2 - W | 3/16 | 5/64 | 1-7/8 | 0.094 - 0.106 | 81145020000 |
| 3 - W | 1/4 | 7/64 | 2 | 0.130 - 0.154 | 81145030000 |
| 4 - W | 5/16 | 1/8 | 2-1/8 | 0.150 - 0.175 | 81145040000 |
| 5 - W | 7/16 | 3/16 | 2-3/4 | 0.230 - 0.256 | 81145050000 |
| 6 - W | 1/2 | 7/32 | 3 | 0.270 - 0.295 | 81145060000 |
| 7 - W | 5/8 | 1/4 | 3-1/4 | 0.315 - 0.340 | 81145070000 |
| 8 - W | 3/4 | 5/16 | 3-1/2 | 0.390 - 0.420 | 81145080000 |


Tolerances

| Tool Diameters | D | d | Angle | |
|----------------|---------|----------|-------|------|
| | | | 60° | 118° |
| .010 - 7/64 | -0.0007 | + 0.0039 | - | - |
| 1/8 - 7/32 | -0.0007 | + 0.0047 | - | - |
| 1/4 - 3/8 | -0.0009 | + 0.0059 | -30' | ± 2° |
| 7/16 - 5/8 | -0.0011 | n/a | - | - |
| 3/4 - 1 | -0.0013 | n/a | - | - |

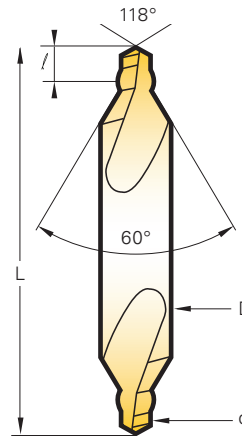

American Standard Form W Sets


| Composition Quantity | 81145000000 |
|-----------------------|-------------|
| 1 piece each Bulge | # 1 - W |
| | # 2 - W |
| | # 3 - W |
| | # 4 - W |
| | # 5 - W |

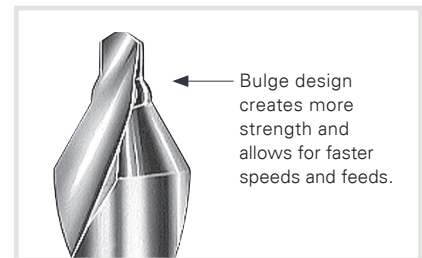

To place an order or to learn more about Pilot Precision Products, contact customer service at 413-350-5200.

Metric Center Drills

Angle 60°

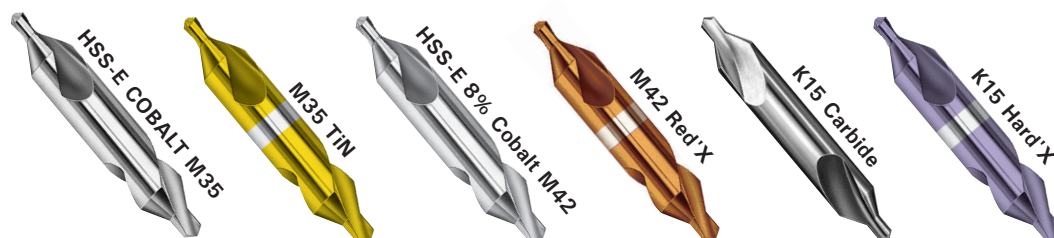Applications: **Centering**

| Plain Center Drills - Angle 60° | | | ISO - NFE 66051-A - DIN 333-A - JIS-1 | | | | | |
|---------------------------------|----|-------------|---------------------------------------|-----------------------|-------------------------------|-------------------|-----------------|----------------------|
| D x d | L | / | Cobalt M35 10 | HSS-E M35 TiN 0811 | HSS-E 8% Cobalt M42 105 | M42/Red'X 0910 | Carbide 8100 | K15/Hard'X 8100-H |
| 3.15 x 0.5* | 25 | 0.6 – 0.9 | - | 80081103105 | - | - | 88810003105 | 888100H031505 |
| 3.15 x 0.8* | | 1.0 – 1.3 | - | 80081103108 | - | - | 88810003108 | 888100H031508 |
| 3.15 x 1.0 | 31 | 1.3 – 1.7 | 81100315100 | 80081103151 | 81105031510 | 80091003151 | 88810003151 | 888100H03151 |
| 3.15 x 1.25 | | 1.6 – 2.0 | 81100315125 | 80081103125 | 81105031512 | 80091003125 | 88810003125 | 888100H0315125 |
| 3.5 x 0.75 | 35 | 1.0 – 1.3 | 81100350750 | 800811035075 | - | - | - | - |
| 4.0 x 1.0 | | 1.3 – 1.7 | 81100410000 | 80081104100 | - | - | 88810004100 | 888100H0410 |
| 4.0 x 1.6 | | 2.0 – 2.6 | 81100416000 | 80081104160 | 81105041600 | 80091004160 | 88810004160 | 888100H0416 |
| 5.0 x 1.5 | 40 | 2.0 – 2.6 | 81100515000 | 80081105150 | - | - | 88810005150 | 888100H0515 |
| 5.0 x 2.0 | | 2.5 – 3.1 | 81100520000 | 80081105200 | 81105052000 | 80091005200 | 88810005200 | 888100H0520 |
| 6.0 x 2.0 | 45 | 2.5 – 3.1 | 81100620000 | 80081106200 | - | - | 88810006200 | 888100H0620 |
| 6.3 x 2.5 | | 3.1 – 3.8 | 81100632500 | 80081106325 | 81105063250 | 80091006325 | 88810006325 | 888100H06325 |
| 8.0 x 2.5 | | 3.1 – 3.8 | 81100825000 | 80081108250 | - | - | 88810008250 | 888100H0825 |
| 8.0 x 3.0 | 50 | 3.9 – 4.6 | 81100830000 | 80081108300 | - | - | 88810008300 | 888100H0830 |
| 8.0 x 3.15 | | 3.9 – 4.6 | 81100831500 | 80081108315 | 81105083150 | 80091008315 | 88810008315 | 888100H08315 |
| 10.0 x 3.0 | 55 | 3.9 – 4.6 | 81101030000 | 80081110300 | - | - | 88810010300 | 888100H1030 |
| 10.0 x 4.0 | | 5.0 – 5.9 | 81101040000 | 80081110400 | 81105104000 | 80091010400 | 88810010400 | 888100H1040 |
| 12.0 x 4.0 | 63 | 5.0 – 5.9 | 81101240000 | 80081112400 | - | - | - | - |
| 12.0 x 5.0 | | 6.3 – 7.2 | 81101250000 | 80081112500 | - | - | 88810012500 | 888100H1250 |
| 12.5 x 5.0 | | 6.3 – 7.2 | 81101255000 | 80081112550 | 81105125500 | 80091012550 | 88810012550 | 888100H1255 |
| 14.0 x 5.0 | 69 | 6.3 – 7.2 | 81101450000 | 80081150450 | - | - | - | - |
| 16.0 x 6.3 | 71 | 8.0 – 8.9 | - | 80081116630 | - | - | 88810016630 | 888100H1663 |
| 20.0 x 8.0 | 80 | 10.1 – 11.1 | - | 80081120800 | - | - | - | - |


*Single end K15 Carbide — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size)

Metric Center Drills

Angle 60°, Form A




Applications: **Centering**

Magafor center drills are particularly effective thanks to their unique ground spiral flutes. Special attention to the concentricity of the drill diameter to body makes them superior to other offerings on the market.

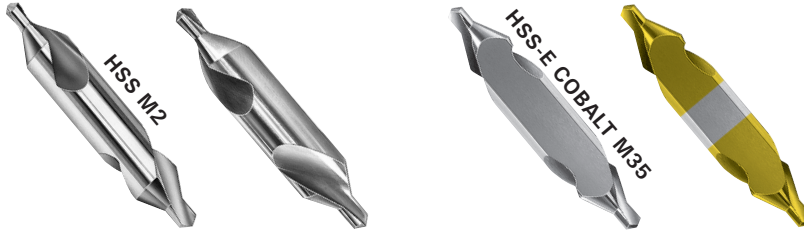

| Metric Center Drills Form A - Angle 60° | | | | | | | |
|---|-----|-------------|----------------------------|---------------------------|-----------|---|-----------------------|
| D x d | L | / | Right Hand HSS M2 11 | Left Hand HSS M2 16 | P -0.1 | With flat, right hand HSS-E M35 Cobalt 0290 | HSS-E M35 TiN 0890 |
| 3.0 x 0.5 | 31 | 0.6 – 0.9 | 81110305000 | - | - | - | - |
| 3.15 x 0.5* | 25 | 0.6 – 0.9 | 81110315050 | 81160315050 | - | - | - |
| 3.15 x 0.63* | | 0.7 – 0.9 | 81110315063 | 81160315063 | - | - | - |
| 3.15 x 0.8* | | 1.0 – 1.3 | 81110315080 | 81160315080 | - | - | - |
| 3.15 x 1.0 | 31 | 1.3 – 1.7 | 81110315100 | 81160315100 | - | - | - |
| 3.15 x 1.25 | | 1.6 – 2.0 | 81113151250 | 81160315125 | - | - | - |
| 3.5 x 0.75 | 35 | 1.0 – 1.3 | 81110350750 | 81160350750 | - | - | - |
| 4.0 x 1.0 | | 1.3 – 1.7 | 81110410000 | 81160410000 | - | - | - |
| 4.0 x 1.25 | | 1.6 – 2.0 | 81110412500 | 81160412500 | - | - | - |
| 4.0 x 1.6 | | 2.0 – 2.6 | 81110416000 | 81160416000 | 3.25 | 80029004160 | 80089004160 |
| 5.0 x 1.5 | 40 | 2.0 – 2.6 | 81110515000 | 81160515000 | - | - | - |
| 5.0 x 1.6 | | 2.0 – 2.6 | 81110516000 | 81160516000 | - | - | - |
| 5.0 x 2.0 | | 2.5 – 3.1 | 81110520000 | 81160520000 | 4.20 | 80029005200 | 80089005200 |
| 6.0 x 2.0 | 45 | 2.5 – 3.1 | 81110620000 | 81160620000 | - | - | - |
| 6.3 x 2.0 | | 2.5 – 3.1 | 81110632000 | 81160632000 | - | - | - |
| 6.3 x 2.5 | | 3.1 – 3.8 | 81110632500 | 81160632500 | 5.35 | 80029006325 | 80089006325 |
| 8.0 x 2.5 | | 3.1 – 3.8 | 81110825000 | 81160825000 | - | - | - |
| 8.0 x 3.0 | 50 | 3.9 – 4.6 | 81110830000 | 81160830000 | - | - | - |
| 8.0 x 3.15 | | 3.9 – 4.6 | 81110831500 | 81160831500 | 6.96 | 80029008315 | 80089008315 |
| 10.0 x 3.0 | | 3.9 – 4.6 | 81111030000 | 81161030000 | - | - | - |
| 10.0 x 3.15 | 55 | 3.9 – 4.6 | 81111031500 | 81161031500 | - | - | - |
| 10.0 x 4.0 | | 5.0 – 5.9 | 81111040000 | 81161040000 | 8.40 | 80029010400 | 80089010400 |
| 12.0 x 4.0 | | 5.0 – 5.9 | 81111240000 | 81161240000 | - | - | - |
| 12.0 x 5.0 | 63 | 6.3 – 7.2 | 81111250000 | 81161250000 | - | - | - |
| 12.5 x 4.0 | | 5.0 – 5.9 | 81111254000 | 81161254000 | - | - | - |
| 12.5 x 5.0 | | 6.3 – 7.2 | 81111255000 | 81161255000 | 10.95 | 80029012550 | 80089012550 |
| 14.0 x 5.0 | 69 | 6.3 – 7.2 | 81111450000 | 81161450000 | - | - | - |
| 16.0 x 5.0 | 71 | 6.3 – 7.2 | 81111650000 | 81161650000 | - | - | - |
| 16.0 x 6.3 | | 8.0 – 8.9 | 81111663000 | 81161663000 | 14.00 | 80029016630 | 80089016630 |
| 18.0 x 6.0 | 77 | 8.0 – 8.9 | 81111860000 | - | - | - | - |
| 20.0 x 6.3 | 80 | 8.0 – 8.9 | 81112063000 | - | - | - | - |
| 20.0 x 8.0 | | 10.1 – 11.1 | 81112080000 | 81162080000 | 17.90 | 80029020800 | - |
| 25.0 x 8.0 | | 10.1 – 11.1 | 81112580000 | - | - | - | - |
| 25.0 x 10.0 | 100 | 12.8 – 13.8 | 81112510000 | - | 22.50 | 80029025100 | - |
| 31.5 x 10.0 | 125 | 12.8 – 13.8 | 81113151000 | - | - | - | - |
| 31.5 x 12.5 | | 16.5 – 17.5 | 81113151250 | - | - | - | - |

*Single end

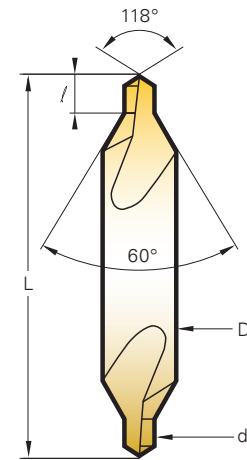


| Tolerances | | | | |
|------------|-----|-----|------|------|
| D | d | L | 60° | 118° |
| h8 | K12 | ± 1 | -30° | ± 2° |




Performance

Recommendations for the use of Center Drills and NC Spot Drills




Form A

- The most universal center drill
- 60° angle
- Standard center
- 118° point




Form W

- The bulge reinforces the point
- Increases chip removal
- Makes the lubrication of the drill easier
- 118° point



Form R

- The radius eliminates the risk of breakage, and is more robust than the 60° drill
- Provides an exact bearing surface
- Serves as a protective chamfer
- 118° point



Form B

- Center drill with protective chamfer guarantees the center from any risk of blows and deformation
- 118° point

SFM: Surface Feet per Minute

RPM: Revolutions per Minute

IPM: Inches per Tooth (chip load)

IPM: Inches per Minute

IPR: Inches per Revolution

Speed Formula:

$$RPM = 3.82 \times (SFM \div Diameter)$$

Feed:

$$IPM = IPT \times \# \text{ of Flutes} \times RPM$$

$$IPR = IPM \div RPM$$

$$SFM = RPM \times Diameter \div 3.82$$

Formula for Speed (RPM)

Example:


#1 center drill (.078) cutting soft material <81 HRB

SFM = 148 for 5/64Ø HSS



$$RPM = 3.82 \times (148 \div 0.0787) = 14.36$$

$$IPM = 0.001 \times 2 \times 7180 = 14.36$$

$$IPR = 14.36 \div 7180 = .002$$



90° NC Spot Drill Centering and chamfering are obtained in a single operation.






120° & 142° NC Spot Drill The preliminary hole corresponds to the angle at the end of the tool used in drilling and prevents it from deviating.

| Material | | HSS | | | | | TiN | | | | | | |
|---------------------------|--------------|-----------|---------------|----------|----------|-----------|----------|---------------|---------------|----------|----------|-----------|----------|
| | | SFM | Feed Inch/Rev | | | | | SFM | Feed Inch/Rev | | | | |
| | | | 2 mm 5/64 | 3 mm 1/8 | 6 mm 1/4 | 10 mm 3/8 | 16mm 5/8 | | 2 mm 5/64 | 3 mm 1/8 | 6 mm 1/4 | 10 mm 3/8 | 16mm 5/8 |
| Steel: | < 81 HRB (B) | 99 – 148 | 0.0020 | 0.0024 | 0.0031 | 0.0059 | 0.0079 | 197 – 296 | 0.0031 | 0.0035 | 0.0047 | 0.0098 | 0.0118 |
| | < 24 Rc (C) | 82 – 99 | | | | | | 165 – 230 | | | | | |
| | 24 – 32 Rc | 49 – 82 | 0.0012 | 0.0016 | 0.0024 | 0.0039 | 0.0059 | 115 – 148 | | | | | |
| | 32 – 41 Rc | 33 – 49 | | | | | | 82 – 99 | | | | | |
| Stainless Steel/Titanium | | 20 – 33 | | | | | | 39 – 53 | | | | | |
| Inconel/Nimonic/Waspaloy | | 16 – 20 | 0.0008 | 0.0012 | 0.0020 | 0.0028 | 0.0039 | 33 – 43 | 0.0016 | 0.0020 | 0.0028 | 0.0039 | 0.0059 |
| Brass/Copper | | 132 – 197 | 0.0020 | 0.0028 | 0.0035 | 0.0059 | 0.0079 | 362 – 428 | 0.0028 | 0.0035 | 0.0055 | 0.0106 | 0.0142 |
| Copper Alloys Bronze | | 99 – 132 | | | | | | 263 – 362 | | | | | |
| Aluminum | | 494 – 658 | 0.0031 | 0.0039 | 0.0079 | 0.0157 | 0.0197 | 1,152 – 1,481 | 0.0047 | 0.0055 | 0.0118 | 0.0217 | 0.0256 |
| Hardened Aluminum < 6% Si | | 197 – 329 | 0.0024 | 0.0031 | 0.0039 | 0.0059 | 0.0098 | 395 – 592 | 0.0031 | 0.0039 | 0.0059 | 0.0118 | 0.0157 |
| Cast Aluminum > 6% Si | | 132 – 197 | | | | | | 262 – 395 | | | | | |
| Thermoplastics | | 329 – 428 | 0.0031 | 0.0035 | 0.0079 | 0.0138 | 0.0157 | 658 – 855 | 0.0047 | 0.0055 | 0.0118 | 0.0217 | 0.0256 |

| Material | | Futura/Red'X | | | | | Carbide | | | | | | |
|---------------------------|--------------|---------------|---------------|----------|----------|-----------|----------|---------------|---------------|----------|----------|-----------|----------|
| | | SFM | Feed Inch/Rev | | | | | SFM | Feed Inch/Rev | | | | |
| | | | 2 mm 5/64 | 3 mm 1/8 | 6 mm 1/4 | 10 mm 3/8 | 16mm 5/8 | | 2 mm 5/64 | 3 mm 1/8 | 6 mm 1/4 | 10 mm 3/8 | 16mm 5/8 |
| Steel: | < 81 HRB (B) | 296 – 395 | 0.0039 | 0.0047 | 0.0063 | 0.0118 | 0.0177 | 362 – 461 | 0.0047 | 0.0055 | 0.0079 | 0.0138 | 0.0217 |
| | < 24 Rc (C) | 247 – 329 | | | | | | 296 – 362 | | | | | |
| | 24 – 32 Rc | 165 – 214 | 0.0028 | 0.0031 | 0.0047 | 0.0071 | 0.0110 | 197 – 263 | | | | | |
| | 32 – 41 Rc | 99 – 214 | | | | | | 115 – 165 | | | | | |
| Stainless Steel/Titanium | | 59 – 79 | | | | | | 72 – 99 | | | | | |
| Inconel/Nimonic/Waspaloy | | 49 – 66 | 0.0020 | 0.0024 | 0.0039 | 0.0055 | 0.0079 | 63 – 82 | 0.0031 | 0.0028 | 0.0047 | 0.0067 | 0.0094 |
| Brass/Copper | | 4,218 – 494 | 0.0039 | 0.0047 | 0.0071 | 0.0142 | 0.0197 | 494 – 592 | 0.0047 | 0.0055 | 0.0087 | 0.0173 | 0.0240 |
| Copper Alloys Bronze | | 362 – 428 | | | | | | 428 – 949 | | | | | |
| Aluminum | | 1,645 – 2,300 | 0.0063 | 0.0071 | 0.0157 | 0.0295 | 0.0354 | 1,974 – 2,632 | 0.0039 | 0.0087 | 0.0193 | 0.0354 | 0.0374 |
| Hardened Aluminum < 6% Si | | 592 – 823 | 0.0039 | 0.0047 | 0.0071 | 0.0142 | 0.0197 | 658 – 987 | 0.0047 | 0.0055 | 0.0087 | 0.0173 | 0.0240 |
| Cast Aluminum > 6% Si | | 395 – 559 | | | | | | 461 – 658 | | | | | |
| Thermoplastics | | 987 – 1316 | 0.0063 | 0.0071 | 0.0157 | 0.0295 | 0.0354 | 1,217 – 1,579 | 0.0079 | 0.0087 | 0.0193 | 0.0354 | 0.0374 |

Short & Long NC Spotting Drills

Angle 90°, 118°, 120°

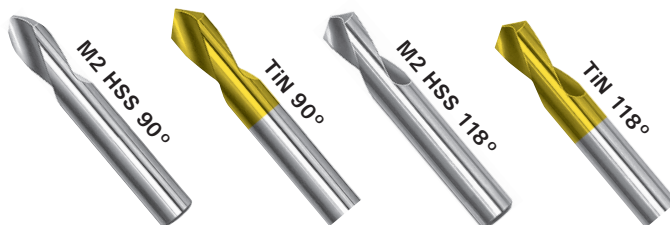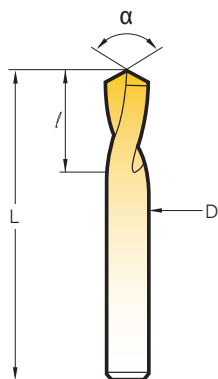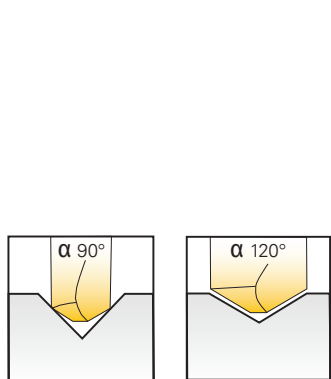

90-degree angle

Centering and chamfering are obtained in a single operation.

118- and 120-degree angle

The preliminary hole obtained corresponds to the angle at the end of the tool used in drilling and prevents it from drifting and allowing the drill point to cut first.

M2 HSS & TiN - Short Series

| D (inch) | L (inch) | / | T | Angle 90° | | Angle 118° | |
|----------|----------|--------|-------|--------------|-------------|--------------|-------------|
| | | | | M2 HSS 8119A | TiN 8008A | M2 HSS 8119B | TiN 8008B |
| 1/8 | 1-1/4 | 0.0380 | 0.012 | 8119A031700 | 8008A031700 | 8119B031700 | 8008B031700 |
| 3/16 | 1-3/8 | 0.5000 | 0.020 | 8119A047600 | 8008A047600 | 8119B047600 | 8008B047600 |
| 1/4 | 1-1/2 | 0.6400 | 0.025 | 8119A063500 | 8008A063500 | 8119B063500 | 8008B063500 |
| 5/16 | | | 0.031 | 8119A079300 | 8008A079300 | 8119B079300 | - |
| 3/8 | | | 0.039 | 8119A095200 | 8008A095200 | 8119B095200 | 8008B095200 |
| 7/16 | 2 | 1 | 0.043 | 8119A111100 | 8008A111100 | 8119B111100 | 8008B111100 |
| 1/2 | | | 0.051 | 8119A127000 | 8008A127000 | 8119B127000 | 8008B127000 |
| 5/8 | 2-1/4 | 1-1/8 | 0.063 | 8119A158700 | 8008A158700 | 8119B158700 | 8008B158700 |
| 3/4 | | | 0.075 | 8119A190500 | 8008A190500 | 8119B190500 | 8008B190500 |
| 7/8 | | | 0.088 | 8119A222200 | 8008A222200 | 8119B222200 | 8008B222200 |
| 1 | 2-1/2 | 1-1/4 | 0.100 | 8119A254000 | 8008A254000 | 8119B254000 | 8008B254000 |

M2 HSS & TiN - Long Series

3 different lengths

| D (inch) | L (inch) | / | T | Angle 90° | | Angle 120° | |
|----------|----------|-------|-------|--------------|--------------|--------------|--------------|
| | | | | M2 HSS 8119C | TiN 8008C | M2 HSS 8119D | TiN 8008D |
| 1/4 | 2-5/8 | 0.900 | 0.025 | 8119C063500 | 8008C063500 | 8119D063500 | 8008D063500 |
| | 4 | 0.900 | | 8119C063504 | 8008C063504 | 8119D063504 | 8008D063504 |
| | 5-1/2 | 0.87 | | 8119C0635055 | 8008C0635055 | 8119D0635055 | 8008D0635055 |
| 3/8 | 3-1/8 | 1 | 0.039 | 8119C095200 | 8008C095200 | 8119D095200 | 8008D095200 |
| | 5 | | | 8119C095205 | 8008C095205 | 8119D095205 | 8008D095205 |
| | 7 | | | 8119C095207 | 8008C095207 | 8119D095207 | 8008D095207 |
| 1/2 | 3-3/4 | 1-3/8 | 0.051 | 8119C127000 | 8008C127000 | 8119D127000 | 8008D127000 |
| | 6 | | | 8119C127006 | 8008C127006 | 8119D127006 | 8008D127006 |
| | 8 | | | 8119C127008 | 8008C127008 | 8119D127008 | 8008D127008 |
| 5/8 | 4-1/2 | 1-3/8 | 0.063 | 8119C158700 | 8008C158700 | 8119D158700 | 8008D158700 |
| | 8 | | | 8119C158708 | 8008C158708 | 8119D158708 | 8008D158708 |
| | 9 | | | 8119C158709 | 8008C158709 | 8119D158709 | 8008D158709 |
| 3/4 | 5 | 1-5/8 | 0.075 | 8119C190505 | 8008C190505 | 8119D190505 | 8008D190505 |
| | 8 | | | 8119C190508 | 8008C190508 | 8119D190508 | 8008D190508 |
| | 10 | | | 8119C190510 | 8008C190510 | 8119D190510 | 8008D190510 |
| 1 | 5-3/8 | 1-3/4 | 0.100 | 8119C254000 | 8008C254000 | 8119D254000 | 8008D254000 |
| | 8 | | | 8119C254008 | 8008C254008 | 8119D254008 | 8008D254008 |
| | 10 | | | 8119C254010 | 8008C254010 | 8119D254010 | 8008D254010 |



Standard Long Extra Long

Tolerances

| Tool Diameters | D (inch) | Angle | L |
|-----------------|------------|-------|---------|
| 1/8" - 3/16" | 0 - 0.0005 | ±1° | ±0.0395 |
| 1/4" - 3/8" | 0 - 0.0006 | | |
| 7/16" - 5/8" | 0 - 0.0007 | | |
| 3/4" - 1" | 0 - 0.0008 | | |
| 1-1/4" - 1-3/4" | 0 - 0.0010 | | |





M2 HSS American Standard Spot Drill Value Sets (4 pieces)

| Composition Quantity | Angle 90° 8119C000004 | Angle 120° 8119D000004 |
|----------------------|--|--|
| 1 piece each | 1/4 x 2-5/8 3/8 x 3-1/8 1/2 x 3-3/4 5/8 x 4-1/2 | 1/4 x 2-5/8 3/8 x 3-1/8 1/2 x 3-3/4 5/8 x 4-1/2 |

NC Spotting Drills

Angle 60°, 90°, 120°

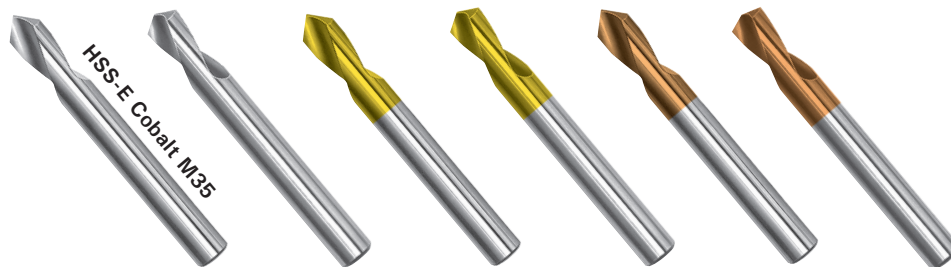


| NC Spotting Drills | | | | | Angle 60° | Angle 90° | Angle 120° | Angle 90° | Angle 120° | Angle 90° | Angle 120° |
|-------------------------|----|--------|-------|-------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Diameter (inch) (mm) | L | / | T | | | Cobalt | Cobalt | M35/TIN | M35/TIN | M35/Red'X | M35/Red'X |
| | | | | 191 | 195 | 196 | 0895 | 0896 | 0995* | 0996* | |
| 0.078 2 | 2 | | 0.315 | 0.008 | - | 81195020000 | 81196020000 | 80089502000 | 80089602000 | 80099502000 | 80099602000 |
| 0.118 3 | | | 0.400 | 0.012 | - | 81195030000 | 81196030000 | 80089503000 | 80089603000 | 80099503000 | 80099603000 |
| 1/8 | 4 | 2-1/16 | 0.400 | 0.012 | - | 81195031700 | 81196031700 | 80089503170 | 80089603170 | 80099503170 | 80099603170 |
| 0.157 4 | | | 0.475 | 0.016 | 81191040000 | 81195040000 | 81196040000 | 80089504000 | 80089604000 | 80099504000 | 80099604000 |
| 3/16 | 5 | 2-3/8 | 0.600 | 0.020 | - | 81195047600 | 81196047600 | 80089504760 | 80089604760 | 80099504760 | 80099604760 |
| 0.197 5 | | | 0.600 | 0.020 | 81191050000 | 81195050000 | 81196050000 | 80089505000 | 80089605000 | 80099505000 | 80099605000 |
| 0.236 6 | 6 | 2-5/8 | 0.800 | 0.023 | 81191060000 | 81195060000 | 81196060000 | 80089506000 | 80089606000 | 80099506000 | 80099606000 |
| 1/4 | | | 0.900 | 0.025 | - | 81195063500 | 81196063500 | 80089506350 | 80089606350 | 80099506350 | 80099606350 |
| 5/16 | 8 | 3-1/8 | 1 | 0.031 | - | 81195079300 | - | 80089507930 | - | - | - |
| 0.315 8 | | | 1 | 0.031 | 81191080000 | 81195080000 | 81196080000 | 80089508000 | 80089608000 | 80099508000 | 80099608000 |
| 3/8 | 10 | 3-1/2 | 1 | 0.039 | - | 81195095200 | 81196095200 | 80089509520 | 80089609520 | 80099509520 | 80099609520 |
| 0.394 10 | | | 1 | 0.039 | 81191100000 | 81195100000 | 81196100000 | 80089510000 | 80089610000 | 80099510000 | 80099610000 |
| 0.472 12 | 12 | 4 | 1-1/4 | 0.047 | 81191120000 | 81195120000 | 81196120000 | 80089512000 | 80089612000 | 80099512000 | 80099612000 |
| 1/2 | | | 1-3/8 | 0.051 | - | 81195127000 | 81196127000 | 80089512700 | 80089612700 | 80099512700 | 80099612700 |
| 0.551 14 | 14 | 4-1/2 | 1-3/8 | 0.055 | - | 81195140000 | 81196140000 | 80089514000 | 80089614000 | 80099514000 | 80099614000 |
| 5/8 | | | | 0.063 | - | 81195158700 | 81196158700 | 80089515870 | 80089615870 | 80099515870 | 80099615870 |
| 0.630 16 | 16 | 5-1/8 | 1-5/8 | 0.063 | 81191160000 | 81195160000 | 81196160000 | 80089516000 | 80089616000 | 80099516000 | 80099616000 |
| 0.709 18 | | | | 0.071 | - | 81195180000 | 81196180000 | 80089518000 | 80089618000 | 80099518000 | 80099618000 |
| 3/4 | 20 | 5-3/8 | 1-3/4 | 0.075 | - | 81195190500 | 81196190500 | 80089519050 | 80089619050 | 80099519050 | 80099619050 |
| 0.787 20 | | | | 0.079 | 81191200000 | 81195200000 | 81196200000 | 80089520000 | 80089620000 | 80099520000 | 80099620000 |
| 0.984 25 | 25 | 5-3/8 | 1-3/4 | 0.098 | - | 81195250000 | 81196250000 | 80089525000 | 80089625000 | 80099525000 | 80099625000 |
| 1 | | | | 0.100 | - | 81195254000 | 81196254000 | 80089525400 | 80089625400 | 80099525400 | 80099625400 |

*The Spotting Drills (0995 & 0996) with Red'X coating are designed for machining abrasive hard alloys.

NC Spotting Drills - Long

| Diameter (inch) (mm) | L | / | T | Angle 90° | Angle 120° | Angle 90° | Angle 120° | |
|-------------------------|-------|---|--------|---------------|---------------|-----------------|-----------------|-------------|
| | | | | Cobalt 197 | Cobalt 199 | Carbide 8197 | Carbide 8199 | |
| 0.118 3 | 3-1/8 | | 0.400 | 0.012 | 81197030000 | 81199030000 | 88819703000 | - |
| 0.157 4 | 4 | | 0.475 | 0.016 | 81197040000 | 81199040000 | 88819704000 | 88819904000 |
| 0.197 5 | 4-3/4 | | 0.600 | 0.020 | 81197050000 | 81199050000 | 88819705000 | 88819905000 |
| 0.236 6 | 5-1/2 | | 0.800 | 0.023 | 81197060000 | 81199060000 | 88819706000 | 88819906000 |
| 1/4 | | | 0.870 | 0.025 | 81197063500 | 81199063500 | 88819706350 | 88819906350 |
| 0.315 8 | 6-3/4 | | 1 | 0.031 | 81197080000 | 81199080000 | 88819708000 | 88819908000 |
| 3/8 | | | 0.039 | 81197095200 | 81199095200 | 88819709520 | 88819909520 | |
| 0.394 10 | 6-3/4 | | 1 | 0.039 | 81197100000 | 81199100000 | 88819710000 | 88819910000 |
| 0.472 12 | | | 1-3/16 | 0.047 | 81197120000 | 81199120000 | 88819712000 | 88819912000 |
| 1/2 | 8 | | 1-3/8 | 0.051 | 81197127000 | 81199127000 | 88819712700 | 88819912700 |
| 5/8 | | | 1-3/8 | 0.063 | 81197158700 | 81199158700 | 88819715870 | 88819915870 |
| 0.630 16 | 8 | | 1-3/8 | 0.063 | 81197160000 | 81199160000 | 88819716000 | 88819916000 |
| 3/4 | | | 1-5/8 | 0.075 | 81197190500 | 81199190500 | 88819719050 | 88819919050 |
| 0.787 20 | 20 | | 1-5/8 | 0.079 | 81197200000 | 81199200000 | 88819720000 | 88819920000 |
| 1 | | | 1-3/4 | 0.100 | 81197254000 | 81199254000 | - | - |

Hard'X coatings available with K15 CARBIDE — 6.5 – 7% Cobalt (0,006 – 0,008mm grain size)

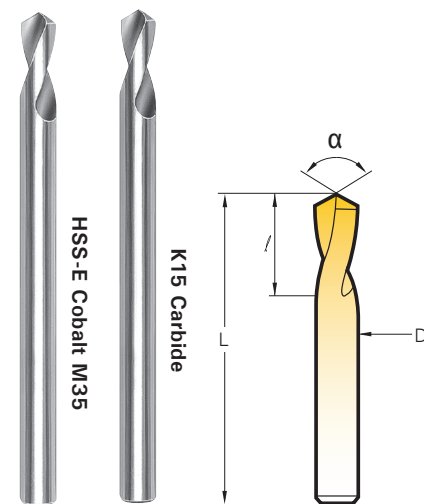

Cobalt Spot Drill Value Sets (4 pieces)


| Composition Quantity | Angle 90° 81195000004 | Angle 120° 81196000004 |
|-------------------------|--------------------------|---------------------------|
| 1 piece each | 1/4 | 1/4 |
| | 3/8 | 3/8 |
| | 1/2 | 1/2 |
| | 5/8 | 5/8 |
| | Ø | Ø |

Sets also available TiN and Futura coated




NC Spotting Drills

Angle 90°, 120°, 142°





| NC Spotting Drills | | | | | Angle 90° | | Angle 120° | | Angle 142° |
|--------------------|------|--------|-------|-------|--------------|-------------------|--------------|-------------------|-------------------|
| Diameter (inch) | (mm) | L | f | T* | Carbide 8195 | K15/Hard'X 8195-H | Carbide 8196 | K15/Hard'X 8196-H | K15/Hard'X 8190-H |
| 0.078 | 2.0 | 1-9/16 | 0.315 | 0.008 | 88819502000 | 888195H0200 | 88819602000 | 888196H0200 | - |
| 0.118 | 3.0 | 1-3/4 | 0.400 | 0.012 | 88819503000 | 888195H0300 | 88819603000 | 888196H0300 | - |
| 0.157 | 4.0 | 2 | 0.475 | 0.016 | 88819504000 | 888195H0400 | 88819604000 | 888196H0400 | - |
| 0.197 | 5.0 | 2 | 0.600 | 0.020 | 88819505000 | 888195H0500 | 88819605000 | 888196H0500 | - |
| 0.236 | 6.0 | | 0.700 | 0.023 | 88819506000 | 888195H0600 | 88819606000 | 888196H0600 | 888190H0600 |
| 1/4 | 8.0 | 2-3/8 | 0.700 | 0.023 | 88819506350 | 888195H0635 | 88819606350 | 888196H0635 | 888190H0635 |
| 5/16 | | | 0.900 | 0.031 | 88819507930 | 888195H0793 | - | - | - |
| 0.315 | 10.0 | 2-3/4 | 0.950 | 0.039 | 88819508000 | 888195H0800 | 88819608000 | 888196H0800 | 888190H0800 |
| 3/8 | | | | | 88819509520 | 888195H0952 | 88819609520 | 888196H0952 | 888190H0952 |
| 0.394 | 12.0 | 3 | 0.950 | 0.039 | 88819510000 | 888195H1000 | 88819610000 | 888196H1000 | 888190H1000 |
| 0.472 | | | | | 88819512000 | 888195H1200 | 88819612000 | 888196H1200 | 888190H1200 |
| 1/2 | 14.0 | 3-1/8 | 1 | 0.051 | 88819512700 | 888195H1270 | 88819612700 | 888196H1270 | 888190H1270 |
| 0.551 | | | | | 88819514000 | 888195H1400 | 88819614000 | 888196H1400 | - |
| 5/8 | 16.0 | 4 | 1-3/8 | 0.063 | 88819515870 | 888195H15870 | 88819615870 | 888196H1587 | 888190H1587 |
| 0.630 | | | | | 88819516000 | 888195H1600 | 88819616000 | 888196H1600 | 888190H1600 |
| 0.787 | 20.0 | 4 | 1-3/8 | 0.079 | 88819520000 | 888195H2000 | 88819620000 | 888196H2000 | - |

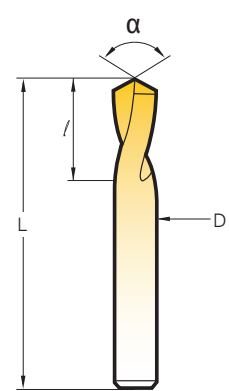

*T = web thickness of split point

†142° angle : for hard alloys and high performance drilling

K15 CARBIDE — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size)

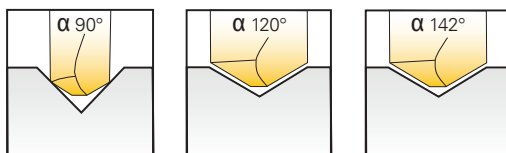

Standard Web Thinning "Split-Point" Feature for High-Speed Cutting

90° NC Spot Drill Centering and chamfering are obtained in a single operation.

120° & 142° NC Spot Drill

The preliminary hole corresponds to the angle at the end of the tool used in drilling and prevents it from deviating




To place an order or to learn more about Pilot Precision Products, contact customer service at 413-350-5200.

DUO-MAG

Double Ended NC Spotting Drills

1 DUO-MAG = 2 Single End NC Spot Drills



Double End NC Spot Drills - Angle 90°

| D | d | L | DUO-MAG 019 | Red'X 0919 |
|------|------|---|-------------|-------------|
| 3/16 | 1/16 | 2 | 80019010000 | 80091901000 |
| 1/4 | 3/32 | 2 | 80019020000 | 80091902000 |
| 3/8 | 9/64 | 3 | 80019030000 | 80091903000 |
| 1/2 | 3/16 | 4 | 80019040000 | 80091904000 |

Metric Double End NC Spot Drills - Angle 90°


| D x d | L | DUO-MAG 019 | Red'X 0919 |
|------------|-----|-------------|-------------|
| 3.0 x 0.5 | 40 | 80019030500 | 80091903050 |
| 4.0 x 1.0 | 45 | 80019041000 | 80091904100 |
| 6.0 x 2.0 | 55 | 80019062000 | 80091906200 |
| 8.0 x 2.5 | 65 | 80019082500 | 80091908250 |
| 10.0 x 3.0 | 75 | 80019103000 | 80091910300 |
| 12.0 x 3.5 | 85 | 80019123500 | 80091912350 |
| 16.0 x 4.0 | 90 | 80019164000 | 80091916400 |
| 20.0 x 5.0 | 100 | 80019205000 | 80091920500 |

Metric Double End Long NC Spot Drills - Angle 90°

| D x d | L | DUO-MAG 019L | Red'X 0919L |
|------------|-----|--------------|-------------|
| 3.0 x 0.5 | 100 | 80019L03050 | 800919L0305 |
| 4.0 x 1.0 | 100 | 80019L04100 | 800919L0410 |
| 6.0 x 2.0 | 100 | 80019L06200 | 800919L0620 |
| 8.0 x 2.5 | 100 | 80019L08250 | 800919L0825 |
| 10.0 x 3.0 | 100 | 80019L10300 | 800919L1030 |
| 12.0 x 3.5 | 100 | 80019L12350 | 800919L1235 |
| 16.0 x 4.0 | 150 | 80019XL1640 | 800919XL164 |
| 20.0 x 5.0 | 150 | 80019XL2050 | 800919XL205 |

Tolerances

| Tool Diameters | D (inch) | Angle | L |
|----------------|-------------|-------|---------|
| 0.078 - 0.118 | 0 + 0.0002" | ±1° | ±0.0395 |
| 1/8 - 0.236 | 0 + 0.0003" | | |
| 1/4 - 0.394 | 0 + 0.0004" | | |
| 0.472 - 1 | 0 + 0.0005" | | |

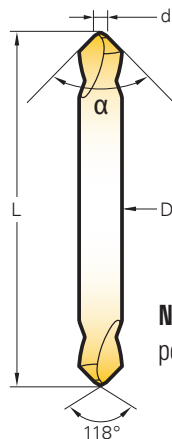


Note: The 118° sharpening angle makes tool penetration easier, while reinforcing the point. (d)




Duo Mag Sets American Standard


| Composition Quantity | 4 Pieces Cobalt 8001900004 | 4 Pieces Red'X 80091900004 |
|----------------------|----------------------------|----------------------------|
| 1 piece each | 3/16" | 3/16" |
| | 1/4" | 1/4" |
| | 3/8" | 3/8" |
| | 1/2" | 1/2" |



Longitudinal Chamfering




Chamfering




Centering Spotting

1 Multi-V = 10 Operations


MULTI-V®




**90°-120°
Interpolation Milling**




**90°-120°
Chamfering**




**60°-90°-120°
Contouring Side Milling**




**60°-90°-120°
Direct Chamfering**




**90°-120°
Centering - Spotting**




**90°-120°
Drilling**




**90°-120°
V - Grooving**



**40°-60°-90°
Engraving**



**60°-90°-120°
Longitudinal Chamfers**



This is the ideal tool for machine centers and NC processing machines.

- The Multi-V combines multiple machining process to:
 - reduce machine set-up time
 - reduce operating time
 - reduce overall tool changes.
- Easy storage:
 - fewer tools required.
 - less tool spaces required in magazine
- Improved performances:
 - fine cutting edge with improved depth and surface finish
 - micro grain solid carbide for better wear resistance and greater rigidity
 - 30° spiral helix facilitates better chip removal

Metric Multi-V - Angles 40°, 60°
K15 Carbide — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size)

| Diameter | | L | f | d2 | T* | Angle 40° | | Angle 60° | |
|----------|------|-------|-------|-------|-------|---------------|---------------|----------------|--|
| (inch) | (mm) | | | | | Multi-V 8040† | Multi-V 8088† | Hard'X 8088-H† | |
| 0.020 | 0.5 | 1-1/2 | 0.040 | 0.118 | 0.002 | 88804000500 | 88808800500 | 888088H0050 | |
| 0.031 | 0.8 | 1-1/2 | 0.063 | 0.118 | 0.003 | - | 88808800800 | 888088H0080 | |
| 0.039 | 1.0 | 1-1/2 | 0.080 | 0.118 | 0.004 | 88804001000 | 88808801000 | 888088H0100 | |
| 0.047 | 1.2 | 1-1/2 | 0.095 | 0.118 | 0.005 | - | 88808801200 | 888088H0120 | |
| 0.059 | 1.5 | 1-1/2 | 0.120 | 0.118 | 0.006 | 88804001500 | 88808801500 | 888088H0150 | |
| 0.070 | 1.8 | 1-1/2 | 0.142 | 0.118 | 0.007 | - | 88808801800 | 888088H0180 | |
| 0.078 | 2.0 | 1-1/2 | 0.160 | 0.118 | 0.008 | 88804002000 | 88808802000 | 888088H0200 | |
| 0.098 | 2.5 | 1-1/2 | 0.195 | 0.118 | 0.010 | - | 88808802500 | 888088H0250 | |
| 0.118 | 3 | 2 | 0.240 | 0.157 | 0.012 | 88804003000 | 88808803000 | 888088H0300 | |
| 0.157 | 4 | 2 | 0.315 | 0.197 | 0.016 | - | 88808804000 | 888088H0400 | |
| 0.197 | 5 | 2 | 0.395 | 0.236 | 0.020 | 88804005000 | 88808805000 | 888088H0500 | |
| 0.236 | 6 | 2-3/8 | 0.475 | 0.315 | 0.023 | - | 88808806000 | 888088H0600 | |
| 0.315 | 8 | 2-3/4 | 0.630 | 0.394 | 0.031 | - | 88808808000 | 888088H0800 | |
| 0.394 | 10 | 2-3/4 | 0.710 | 0.472 | 0.039 | - | 88808810000 | 888088H1000 | |
| 0.472 | 12 | 2-3/4 | 0.790 | 0.472 | 0.047 | - | 88808812000 | 888088H1200 | |
| 0.630 | 16 | 3-1/8 | 1.025 | 0.630 | 0.063 | - | 88808816000 | 888088H1600 | |
| 0.787 | 20 | 4 | 1.260 | 0.787 | 0.079 | - | 88808820000 | 888088H2000 | |



K15 Carbide

*T = web thickness of split point

†Angle 40° – 60° : ideal for engraving

MULTI-V®



Multi-Function Tools

1 Multi-V = 10 Operations

Hard'X
AITIN Latuma

Standard Multi-V - Angle 90°
K15 Carbide — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size)

| Diameter | | L | / | d2 | T | Multi-V 8090 | Hard'X 8090-H |
|----------|------|-------|-------|-------|-------|-----------------|------------------|
| (inch) | (mm) | | | | | | |
| 0.003 | 0.1 | 1-1/2 | 0.008 | 0.118 | 0.001 | 88809000100 | 888090H0010 |
| 0.007 | 0.2 | 1-1/2 | 0.016 | 0.118 | 0.001 | 88809000200 | 888090H0020 |
| 0.011 | 0.3 | 1-1/2 | 0.024 | 0.118 | 0.001 | 88809000300 | 888090H0030 |
| 0.015 | 0.4 | 1-1/2 | 0.032 | 0.118 | 0.002 | 88809000400 | 888090H0040 |
| 0.020 | 0.5 | 1-1/2 | 0.040 | 0.118 | 0.002 | 88809000500 | 888090H0050 |
| 0.024 | 0.6 | 1-1/2 | 0.047 | 0.118 | 0.002 | 88809000600 | 888090H0060 |
| 0.028 | 0.7 | 1-1/2 | 0.055 | 0.118 | 0.003 | 88809000700 | 888090H0070 |
| 0.031 | 0.8 | 1-1/2 | 0.063 | 0.118 | 0.003 | 88809000800 | 888090H0080 |
| 0.035 | 0.9 | 1-1/2 | 0.071 | 0.118 | 0.003 | 88809000900 | 888090H0090 |
| 0.039 | 1.0 | 1-1/2 | 0.080 | 0.118 | 0.004 | 88809001000 | 888090H0100 |
| 0.043 | 1.1 | 1-1/2 | 0.087 | 0.118 | 0.004 | 88809001100 | 888090H0110 |
| 0.047 | 1.2 | 1-1/2 | 0.095 | 0.118 | 0.005 | 88809001200 | 888090H0120 |
| 0.051 | 1.3 | 1-1/2 | 0.102 | 0.118 | 0.005 | 88809001300 | 888090H0130 |
| 0.055 | 1.4 | 1-1/2 | 0.110 | 0.118 | 0.006 | 88809001400 | 888090H0140 |
| 0.059 | 1.5 | 1-1/2 | 0.120 | 0.118 | 0.006 | 88809001500 | 888090H0150 |
| 0.0625 | 1.58 | 1-3/4 | 0.126 | 0.125 | 0.007 | 88809015870 | 888090H1587 |
| 0.063 | 1.6 | 1-1/2 | 0.125 | 0.118 | 0.006 | 88809001600 | 888090H0160 |
| 0.066 | 1.7 | 1-1/2 | 0.134 | 0.118 | 0.007 | 88809001700 | 888090H0170 |
| 0.071 | 1.8 | 1-1/2 | 0.140 | 0.118 | 0.007 | 88809001800 | 888090H0180 |
| 0.074 | 1.9 | 1-1/2 | 0.145 | 0.118 | 0.008 | 88809001900 | 888090H0190 |
| 0.078 | 2.0 | 1-1/2 | 0.160 | 0.118 | 0.008 | 88809002000 | 888090H0200 |
| 0.082 | 2.1 | 1-1/2 | 0.165 | 0.118 | 0.008 | 88809002100 | 888090H0210 |
| 0.086 | 2.2 | 1-1/2 | 0.173 | 0.118 | 0.009 | 88809002200 | 888090H0220 |
| 0.090 | 2.3 | 1-1/2 | 0.181 | 0.118 | 0.009 | 88809002300 | 888090H0230 |
| 0.094 | 2.4 | 1-1/2 | 0.190 | 0.118 | 0.009 | 88809002400 | 888090H0240 |
| 0.098 | 2.5 | 1-1/2 | 0.195 | 0.118 | 0.010 | 88809002500 | 888090H0250 |
| 0.102 | 2.6 | 1-1/2 | 0.205 | 0.118 | 0.010 | 88809002600 | 888090H0260 |
| 0.118 | 3.0 | 2 | 0.240 | 0.157 | 0.012 | 88809003000 | 888090H0300 |
| 0.125 | 3.17 | 2 | 0.248 | 0.188 | 0.013 | 88809003170 | 888090H0317 |
| 0.157 | 4.0 | 2 | 0.315 | 0.197 | 0.016 | 88809004000 | 888090H0400 |
| 3/16 | - | 2 | 0.375 | 1/4 | 0.020 | 88809004760 | 888090H0476 |
| 0.197 | 5.0 | 2 | 0.395 | 0.236 | 0.020 | 88809005000 | 888090H0500 |
| 0.236 | 6.0 | 2-3/4 | 0.475 | 0.315 | 0.023 | 88809006000 | 888090H0600 |
| 1/4 | - | 2-3/4 | 0.475 | 5/16 | 0.025 | 88809006350 | 888090H0635 |
| 5/16 | - | 2-3/4 | 0.630 | 3/8 | 0.031 | 88809007930 | 888090H0793 |
| 0.315 | 8.0 | 2-3/4 | 0.630 | 0.394 | 0.031 | 88809008000 | 888090H0800 |
| 3/8 | - | 2-3/4 | 0.710 | 1/2 | 0.039 | 88809009520 | 888090H0952 |
| 0.394 | 10.0 | 2-3/4 | 0.710 | 0.472 | 0.039 | 88809010000 | 888090H1000 |
| 0.472 | 12.0 | 2-3/4 | 0.790 | 0.47 | 0.047 | 88809012000 | 888090H1200 |
| 1/2 | - | 2-3/4 | 0.790 | 1/2 | 0.051 | 88809012700 | 888090H1270 |
| 5/8 | - | 3-1/8 | 1.000 | 5/8 | 0.063 | 88809015870 | 888090H1587 |
| 0.630 | 16.0 | 3-1/8 | 1.025 | 0.630 | 0.063 | 88809016000 | 888090H1600 |
| 0.787 | 20.0 | 4 | 1.260 | 0.787 | 0.079 | 88809020000 | 888090H2000 |

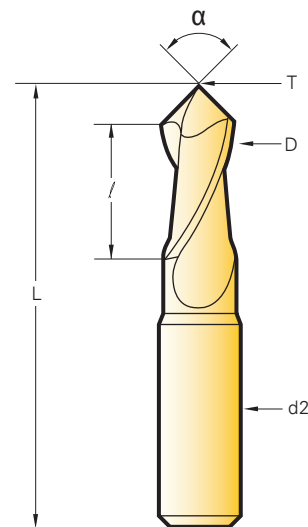


Tolerances

| L | D | ± 1° | α | d2 |
|---------------|------------------|---------------|-------------|-------------|
| 0.003 – 0.118 | -0 – 0.0010 | | 0.118 | 0 – 0.00020 |
| 0.157 – 0.236 | -0 – 0.0012 | 0.157 – 0.197 | 1 – 0.00030 | |
| 0.250 – 0.394 | -0 – 0.0014 | 0.197 – 0.500 | 1 – 0.00035 | |
| 0.472 – 0.630 | -0.0018 – 0.0036 | 0.500 – 0.630 | 1 – 0.00045 | |
| 0.787 | -0.0025 – 0.0045 | 0.787 | 1 – 0.00050 | |


*T = web thickness of split point

Metric Multi-V - Angle 100°, 120°
K15 Carbide — 6.5 – 7% Cobalt (0.006 – 0.008mm grain size)


| Diameter | | L | / | d2 | T | Angle 120° | | Angle 100° | |
|----------|------|-------|-------|-------|-------|-----------------|------------------|-----------------|------------------|
| (inch) | (mm) | | | | | Multi-V 8092 | Hard'X 8092-H | Multi-V 8095 | Hard'X 8095-H |
| 0.039 | 1.0 | 1-1/2 | 0.080 | 0.118 | 0.004 | 88809201000 | 888092H0100 | - | - |
| 0.059 | 1.5 | 1-1/2 | 0.120 | 0.118 | 0.006 | 88809201500 | 888092H0150 | - | - |
| 0.078 | 2.0 | 1-1/2 | 0.160 | 0.118 | 0.008 | 88809202000 | 888092H0200 | - | - |
| 0.098 | 2.5 | 1-1/2 | 0.195 | 0.118 | 0.010 | 88809202500 | 888092H0250 | - | - |
| 0.118 | 3.0 | 2 | 0.240 | 0.157 | 0.012 | 88809203000 | 888092H0300 | - | - |
| 0.157 | 4.0 | 2 | 0.315 | 0.197 | 0.016 | 88809204000 | 888092H0400 | - | - |
| 0.197 | 5.0 | 2 | 0.395 | 0.236 | 0.020 | 88809205000 | 888092H0500 | - | - |
| 0.236 | 6.0 | 2-3/8 | 0.475 | 0.315 | 0.023 | 88809206000 | 888092H0600 | 88809506000 | 888095H0600 |
| 0.315 | 8.0 | 2-3/4 | 0.630 | 0.394 | 0.031 | 88809208000 | 888092H0800 | 88809508000 | 888095H0800 |
| 0.394 | 10.0 | 2-3/4 | 0.710 | 0.472 | 0.039 | 88809210000 | 888092H1000 | 88809510000 | 888095H1000 |
| 0.472 | 12.0 | 2-3/4 | 0.790 | 0.472 | 0.047 | 88809212000 | 888092H1200 | 88809512000 | 888095H1200 |
| 0.630 | 16.0 | 2-1/8 | 1.025 | 0.630 | 0.063 | 88809216000 | 888092H1600 | 88809516000 | 888095H1600 |
| 0.787 | 20.0 | 4 | 1.260 | 0.787 | 0.079 | 88809220000 | 888092H2000 | - | - |




*T = web thickness of split point




**90°-120°
Centering - Spotting**




**90°-120°
Chamfering**




**60°-90°-120°
Direct Chamfering**



**90°-120°
Drilling**



**90°-120°
V - Grooving**




60°-90°-120°


Longitudinal Chamfers



**40°-60°
Engraving**



**90°-120°
Interpolation
Milling**



**60°-90°-120°
Contouring
Side Milling**

| Performance Recommendations for Use | | | | | | | | |
|---|-----------|------------|-------------|------------|--------------|------------------|-------------|--------|
| Material | SFM | | Diameter | | | Feed inches/rev. | | |
| | | | 3mm - 3/16" | 5mm - 1/4" | 10mm - 5/16" | 12mm - 1/2" | 16mm - 5/8" | 20mm |
| Steel < 81 HRB (B) | 230 - 247 | RPM | 6400 | 4000 | 2500 | 1900 | 1500 | 1300 |
| | | IPM | 12.6 | 12.6 | 13.8 | 14.2 | 14.2 | 14.3 |
| | | inch/tooth | 0.002 | 0.0031 | 0.0055 | 0.0075 | 0.0094 | 0.0110 |
| Steel < 24 Rc (C) | 132 - 197 | RPM | 4000 | 2600 | 1600 | 1200 | 900 | 850 |
| | | IPM | 7.9 | 8.2 | 8.8 | 9.4 | 8.9 | 9.4 |
| | | inch/tooth | 0.002 | 0.0031 | 0.0055 | 0.0075 | 0.0094 | 0.0110 |
| Steels 24 - 32 RC Cast Iron < 180 HB (Grey Cast Iron) | 115 - 132 | RPM | 3200 | 2200 | 1400 | 1000 | 850 | 680 |
| | | IPM | 5.7 | 6.1 | 6.6 | 7.1 | 7.4 | 7.5 |
| | | inch/tooth | 0.0018 | 0.0028 | 0.0047 | 0.0071 | 0.0087 | 0.0110 |
| Steels 32 - 41 RC Cst Iron > 180 HB Stainless Steels | 99 - 115 | RPM | 2800 | 1800 | 1100 | 800 | 650 | 550 |
| | | IPM | 5.0 | 5.0 | 5.2 | 5.4 | 5.6 | 5.6 |
| | | inch/tooth | 0.0018 | 0.0028 | 0.0047 | 0.0067 | 0.0087 | 0.0102 |
| Titanium Alloys | 82 - 99 | RPM | 2200 | 1600 | 900 | 660 | 500 | 480 |
| | | IPM | 3.5 | 3.8 | 3.9 | 4.1 | 4.3 | 4.7 |
| | | inch/tooth | 0.0016 | 0.0024 | 0.0043 | 0.0063 | 0.0087 | 0.0098 |
| Ni Co Alloys Inconel - Nimonic - Waspaloy | 66 | RPM | 1800 | 1100 | 700 | 500 | 400 | 320 |
| | | IPM | 2.8 | 2.6 | 3.0 | 3.1 | 3.1 | 3.1 |
| | | inch/tooth | 0.0016 | 0.0024 | 0.0043 | 0.0063 | 0.0079 | 0.0098 |
| Copper Alloys Bronze | 165 - 395 | RPM | 5000 | 3500 | 2200 | 1900 | 1700 | 1400 |
| | | IPM | 19.7 | 20.7 | 21.7 | 22.4 | 23.4 | 24.8 |
| | | inch/tooth | 0.0039 | 0.0059 | 0.0098 | 0.0118 | 0.0138 | 0.0177 |
| Aluminum | 494 | RPM | 10000 | 6300 | 4000 | 3200 | 2500 | 2000 |
| | | IPM | 19.7 | 22.3 | 23.6 | 25.2 | 26.6 | 27.6 |
| | | inch/tooth | 0.0020 | 0.0035 | 0.0059 | 0.0079 | 0.0106 | 0.0138 |
| Thermoplastics | 494 | RPM | 7300 | 4600 | 2800 | 2900 | 2300 | 1900 |
| | | IPM | 14.4 | 16.3 | 20.9 | 22.8 | 24.4 | 26.2 |
| | | inch/tooth | 0.002 | 0.0035 | 0.0075 | 0.0079 | 0.0106 | 0.0138 |

| Performance Recommendations for Use | | | | | | | | |
|---|-----------|------------|-------------|------------|--------------|------------------|-------------|--------|
| Material | SFM | | Diameter | | | Feed inches/rev. | | |
| | | | 3mm - 3/16" | 5mm - 1/4" | 10mm - 5/16" | 12mm - 1/2" | 16mm - 5/8" | 20mm |
| Steel < 81 HRB (B) | 230 - 247 | RPM | 6800 | 4300 | 2650 | 2000 | 1500 | 1200 |
| | | IPM | 2.6 | 2.6 | 2.8 | 3.0 | 3.0 | 3.0 |
| | | inch/tooth | 0.0002 | 0.0003 | 0.0006 | 0.0007 | 0.0010 | 0.0012 |
| Steel < 24 Rc (C) | 132 - 197 | RPM | 5400 | 3500 | 2100 | 1600 | 1200 | 1000 |
| | | IPM | 2.2 | 2.2 | 2.3 | 2.4 | 2.4 | 2.4 |
| | | inch/tooth | 0.0002 | 0.0003 | 0.0006 | 0.0007 | 0.0010 | 0.0012 |
| Steels 24 - 32 RC Cast Iron < 180 HB (Grey Cast Iron) | 115 - 132 | RPM | 3600 | 2300 | 1400 | 1000 | 800 | 630 |
| | | IPM | 1.1 | 1.1 | 1.3 | 1.4 | 1.4 | 1.4 |
| | | inch/tooth | 0.0002 | 0.0002 | 0.0005 | 0.0007 | 0.0008 | 0.0011 |
| Steels 32 - 41 RC Cst Iron > 180 HB Stainless Steels | 99 - 115 | RPM | 3000 | 2000 | 1200 | 900 | 700 | 550 |
| | | IPM | 1.0 | 1.0 | 1.2 | 1.2 | 1.2 | 1.2 |
| | | inch/tooth | 0.0002 | 0.0002 | 0.0005 | 0.0006 | 0.0008 | 0.0011 |
| Titanium Alloys | 82 - 99 | RPM | 2200 | 1600 | 1000 | 760 | 600 | 400 |
| | | IPM | 0.7 | 0.8 | 0.8 | 0.8 | 0.9 | 0.9 |
| | | inch/tooth | 0.0002 | 0.0002 | 0.0004 | 0.0005 | 0.0007 | 0.0011 |
| Ni Co Alloys Inconel - Nimonic - Waspaloy | 66 | RPM | 1800 | 1100 | 700 | 500 | 400 | 320 |
| | | IPM | 0.4 | 0.5 | 0.6 | 0.6 | 0.6 | 0.6 |
| | | inch/tooth | 0.0001 | 0.0002 | 0.0004 | 0.0005 | 0.0007 | 0.0010 |
| Copper Alloys Bronze | 165 - 395 | RPM | 7000 | 6000 | 3500 | 3200 | 2200 | 1750 |
| | | IPM | 4.4 | 4.7 | 4.7 | 5.0 | 5.2 | 5.5 |
| | | inch/tooth | 0.0003 | 0.0004 | 0.0007 | 0.0008 | 0.0012 | 0.0016 |
| Aluminum | 494 | RPM | 13000 | 8600 | 5300 | 4000 | 3000 | 2400 |
| | | IPM | 7.9 | 8.7 | 9.4 | 9.4 | 9.8 | 9.8 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0009 | 0.0012 | 0.0017 | 0.0020 |
| Thermoplastics | 494 | RPM | 13000 | 8600 | 5300 | 4000 | 3000 | 2400 |
| | | IPM | 10.2 | 10.2 | 10.4 | 10.6 | 10.6 | 10.6 |
| | | inch/tooth | 0.0004 | 0.0006 | 0.0010 | 0.0013 | 0.0018 | 0.0022 |

| Performance Recommendations for Use | | | | | | | | |
|---|-----------|------------|-------------|------------|--------------|------------------|-------------|--------|
| Material | SFM | | Diameter | | | Feed inches/rev. | | |
| | | | 3mm - 3/16" | 5mm - 1/4" | 10mm - 5/16" | 12mm - 1/2" | 16mm - 5/8" | 20mm |
| Steel < 81 HRB (B) | 230 - 247 | RPM | 6800 | 4300 | 2650 | 2000 | 1500 | 1200 |
| | | IPM | 4.3 | 4.7 | 5.1 | 5.9 | 6.1 | 6.1 |
| | | inch/tooth | 0.003 | 0.0006 | 0.0010 | 0.0016 | 0.0020 | 0.0026 |
| Steel < 24 Rc (C) | 132 - 197 | RPM | 5400 | 3500 | 2100 | 1600 | 1200 | 1000 |
| | | IPM | 3.3 | 3.5 | 4.1 | 4.7 | 4.9 | 4.9 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0010 | 0.0016 | 0.0020 | 0.0024 |
| Steels 24 - 32 RC Cast Iron < 180 HB (Grey Cast Iron) | 115 - 132 | RPM | 3600 | 2300 | 1400 | 1000 | 800 | 630 |
| | | IPM | 2.3 | 2.4 | 2.8 | 3.1 | 3.1 | 3.1 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0010 | 0.0016 | 0.0020 | 0.0024 |
| Steels 32 - 41 RC Cst Iron > 180 HB Stainless Steels | 99 - 115 | RPM | 3000 | 2000 | 1200 | 900 | 700 | 550 |
| | | IPM | 1.8 | 2.0 | 2.4 | 2.6 | 2.6 | 2.6 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0010 | 0.0014 | 0.0020 | 0.0024 |
| Titanium Alloys | 82 - 99 | RPM | 2200 | 1600 | 1000 | 760 | 600 | 400 |
| | | IPM | 1.4 | 1.6 | 2.0 | 2.2 | 2.2 | 2.2 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0010 | 0.0014 | 0.0018 | 0.0028 |
| Ni Co Alloys Inconel - Nimonic - Waspaloy | 66 | RPM | 1800 | 1100 | 700 | 500 | 400 | 320 |
| | | IPM | 1.0 | 1.0 | 1.4 | 1.4 | 1.6 | 1.6 |
| | | inch/tooth | 0.0003 | 0.0004 | 0.0010 | 0.0014 | 0.0020 | 0.0024 |
| Copper Alloys Bronze | 165 - 395 | RPM | 10000 | 7000 | 3600 | 2500 | 2300 | 1800 |
| | | IPM | 7.9 | 8.3 | 8.5 | 8.9 | 9.1 | 9.2 |
| | | inch/tooth | 0.0004 | 0.0006 | 0.0012 | 0.0018 | 0.0020 | 0.0026 |
| Aluminum | 494 | RPM | 13000 | 8600 | 5300 | 4000 | 3000 | 2400 |
| | | IPM | 8.3 | 8.9 | 12.6 | 14.2 | 11.8 | 12.2 |
| | | inch/tooth | 0.0003 | 0.0005 | 0.0012 | 0.0018 | 0.0020 | 0.0026 |
| Thermoplastics | 494 | RPM | 13000 | 8600 | 5300 | 4000 | 3000 | 2400 |
| | | IPM | 12.2 | 10.2 | 14.6 | 15.7 | 12.6 | 13.0 |
| | | inch/tooth | 0.0005 | 0.0006 | 0.0014 | 0.0020 | 0.0020 | 0.0028 |



Biconical Cutters

Applications: **Front and Back Chamfering**

Hard'X
AlTiN Latuma

Bi-Face Advantages

Special design = positive cut + relieving profile

- Unequalled surface finish
- Impressive performance
- Extended tool profile life


*For super finish operations, **Bi-face** has a constant relieved profile. Longitudinal or interpolated work for front and back chamfering of edges and holes.*

Tolerances

| D | Tolerance | L | α |
|----------------|-----------|---------|------|
| Ø .040 ~ 0.197 | 0 - 0.002 | ± 0.040 | ± 1° |
| Ø .236 ~ 0.630 | 0 - 0.004 | ± 0.040 | ± 1° |



K15 Carbide

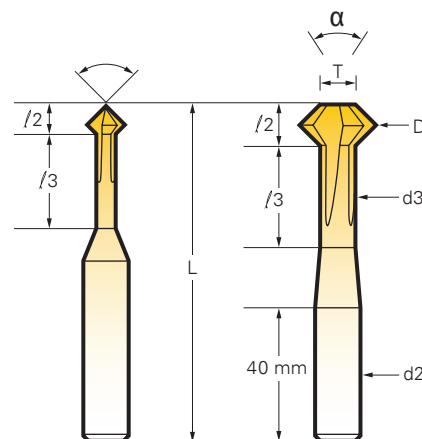

Mini

Standard

Mini - Angle 90° 3 Flutes

| Diameter (inch) (mm) | | d2 | d3 max | T max | L min | l/2 | l/3 | Bi-face 8480 | Hard'X 8480-H |
|---------------------------|-----|-------|-----------|----------|----------|-------|-------|-----------------|------------------|
| 0.040 | 1.0 | 0.118 | 0.028 | 0.012 | 2-3/8 | 0.020 | 0.197 | 88848001000 | 888480H0100 |
| 0.059 | 1.5 | | 0.043 | 0.018 | | 0.029 | 0.236 | 88848001500 | 888480H0150 |
| 0.079 | 2.0 | | 0.059 | 0.024 | | 0.037 | 0.315 | 88848002000 | 888480H0200 |
| 0.118 | 3.0 | | 0.087 | 0.035 | | 0.059 | 0.394 | 88848003000 | 888480H0300 |


Standard - Angle 90° 4 Flutes

| Diameter (inch) (mm) | | d2 | d3 max | T max | L min | l/2 | l/3 | Bi-face 8490 | Hard'X 8490-H |
|---------------------------|------|-------|-----------|----------|----------|-------|-------|-----------------|------------------|
| 0.118 | 3.0 | 0.236 | 0.087 | 0.047 | 4 | 0.051 | 0.394 | 88849003000 | 888490H0300 |
| 0.157 | 4.0 | | 0.114 | 0.063 | | 0.069 | 0.472 | 88849004000 | 888490H0400 |
| 0.197 | 5.0 | | 0.134 | 0.079 | | 0.091 | 0.591 | 88849005000 | 888490H0500 |
| 0.236 | 6.0 | | 0.154 | 0.094 | | 0.114 | 0.709 | 88849006000 | 888490H0600 |
| 0.315 | 8.0 | | 0.193 | 0.193 | | 0.118 | 1.339 | 88849008000 | 888490H0800 |
| 0.394 | 10.0 | | 0.232 | 0.232 | | 0.157 | | 88849010000 | 888490H1000 |
| 0.472 | 12.0 | | 0.232 | 0.232 | | 0.236 | | 88849012000 | 888490H1200 |
| 0.630 | 16.0 | | 0.394 | 0.311 | | 0.315 | | 88849016000 | 888490H1600 |


Standard - Angle 60° 4 Flutes

| Diameter (inch) (mm) | | d2 | d3 max | T max | L min | l/2 | l/3 | Bi-face 8460 | Hard'X 8460-H |
|---------------------------|------|-------|-----------|----------|----------|-------|-------|-----------------|------------------|
| 0.197 | 5.0 | 0.236 | 0.134 | 0.134 | 4 | 0.110 | 1.339 | 88846005000 | 888460H0500 |
| 0.315 | 8.0 | 0.236 | 0.193 | 0.232 | | 0.213 | | 88846008000 | 888460H0800 |
| 0.472 | 12.0 | 0.394 | 0.232 | 0.232 | | 0.413 | | 88846012000 | 888460H1200 |


See contouring section on page 85 for Bi-Face performance parameters.




Front Chamfering




Back Chamfering




Top Chamfering



Bottom Chamfering



V-Grooving



Deburring

Angle 60°

Thread Milling Cutters - Angle 60°
3 Flutes

| Screw Diameter | D (mm) | d2 | d1 | L | / | Hard'X 845-H |
|----------------|--------|----|------|----|-----|--------------|
| M0.8 | 0.57 | 3 | 0.27 | 39 | 2.4 | 88845MH0080 |
| M0.9 | 0.64 | | 0.31 | | 2.7 | 88845MH0090 |
| M1.0 | 0.71 | | 0.35 | | 3.0 | 88845MH0100 |
| M1.2 | 0.91 | | 0.55 | | 3.6 | 88845MH0120 |
| M1.4 | 1.06 | | 0.62 | | 4.2 | 88845MH0140 |
| M1.6 | 1.2 | | 0.69 | | 4.8 | 88845MH0160 |
| M1.8 | 1.35 | | 0.84 | | 5.5 | 88845MH0180 |
| M2.0 | 1.5 | | 0.92 | | 6 | 88845MH0200 |
| M2.5 | 1.9 | | 1.27 | | 7 | 88845MH0250 |
| M3 | 2.3 | | 1.57 | | 9 | 88845MH0300 |
| M4 | 3.1 | 6 | 2.09 | 66 | 12 | 88845MH0400 |
| M5 | 4.0 | | 2.90 | | 15 | 88845MH0500 |
| M6 | 4.8 | | 3.47 | | 18 | 88845MH0600 |
| M8 | 6.5 | | 4.85 | | 22 | 88845MH0800 |
| M10 | 7.9 | 8 | 5.95 | 80 | 26 | 88845MH1000 |
| | | | | | | |



K15 Carbide

The same tool will achieve different pitches (right or left hand), in blind or thru holes.

Multi-Function Carbide Miniature Tools

Applications: **Corner Rounding End-Mills**




K15 Carbide

These cutters are designed for CNC machines and allow machining of even very thin materials and easy regrinds.



The radius is positioned in relation to the small Ø d1-, making it possible to machine compound forms, small slots and holes from 0.5mm.


Hard'X
AlTiN Latuma

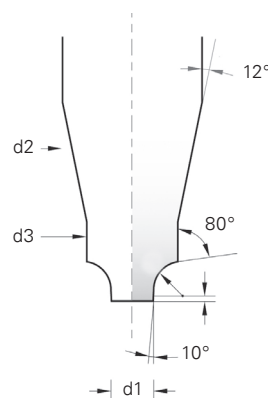

Miniature

| Radius | | d1 | d2 | d3 | Δx | / | L | Carbide 8550 | Hard'X 8550-H | |
|--------|------|-------|-------|-------|-------|-------|-------------|--------------|---------------|-------------|
| (inch) | (mm) | | | | | | | | | |
| 0.0039 | 0.10 | 0.020 | 0.118 | 0.031 | 0.35 | 0.098 | 2 | 88855000100 | 888550H0010 | |
| 0.0059 | 0.15 | | | 0.035 | 0.40 | 0.098 | | 88855000150 | 888550H0015 | |
| 0.0079 | 0.20 | | | 0.040 | 0.45 | 0.098 | | 88855000200 | 888550H0020 | |
| 0.0098 | 0.25 | | | 0.040 | 0.50 | 0.098 | | 88855000250 | 888550H0025 | |
| 0.0118 | 0.30 | | | 0.047 | 0.55 | 0.098 | | 88855000300 | 888550H0030 | |
| 0.0157 | 0.40 | | | 0.055 | 0.65 | 0.098 | | 88855000400 | 888550H0040 | |
| 0.0197 | 0.50 | | | 0.063 | 0.75 | 0.098 | | 88855000500 | 888550H0050 | |
| 0.0236 | 0.60 | | | 0.071 | 0.85 | 0.118 | | 88855000600 | 888550H0060 | |
| 0.0276 | 0.70 | | | 0.083 | 0.95 | 0.118 | | 88855000700 | 888550H0070 | |
| 0.0295 | 0.75 | | | 0.083 | 1.00 | 0.118 | | 88855000750 | 888550H0075 | |
| 0.0315 | 0.80 | 0.031 | 0.157 | 0.098 | 1.20 | 0.157 | 2-3/16 | 88855000800 | 888550H0080 | |
| 0.0354 | 0.90 | | | 0.114 | 1.30 | 0.157 | | 88855000900 | 888550H0090 | |
| 0.0394 | 1.00 | | | 0.114 | 1.40 | 0.157 | | 88855001000 | 888550H0100 | |
| 0.0492 | 1.25 | | | 0.134 | 1.65 | 0.157 | | 88855001250 | 888550H0125 | |
| 0.0591 | 1.50 | | | 0.197 | 0.180 | 2.25 | | 0.236 | 88855001500 | 888550H0150 |
| 0.0689 | 1.75 | | | 0.236 | 0.220 | 2.50 | | 0.236 | 88855001750 | 888550H0175 |
| 0.0787 | 2.00 | | | 0.236 | 0.220 | 2.75 | | 0.315 | 88855002000 | 888550H0200 |
| 0.0886 | 2.25 | | | 0.315 | 0.260 | 3.00 | | 0.394 | 88855002250 | 888550H0225 |
| 0.0984 | 2.50 | | | 0.315 | 0.260 | 3.25 | | 0.394 | 88855002500 | 888550H0250 |
| 0.1181 | 3.00 | | | 0.315 | 0.299 | 3.75 | | 0.394 | 88855003000 | 888550H0300 |
| 0.1575 | 4.00 | 0.075 | 0.394 | 0.394 | 4.95 | - | 88855004000 | 888550H0400 | | |
| 0.1969 | 5.00 | 0.075 | 0.472 | 0.472 | 5.95 | - | 88855005000 | 888550H0500 | | |

Coating is available

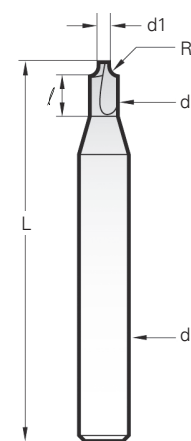


Tolerances

| R | d1 | d2 | L |
|---------|----------|----|---------|
| ± .0008 | ± .00039 | h6 | ± .0040 |


TRI-DENT Imperial

3 Flute Countersinks


| Three Flute Countersinks | | | | | | | | |
|--------------------------|----------|---------------|------------------|-------|-------------|-------------|-------------|-------------|
| Angle | Diameter | | Capacity min/max | d | L | Cobalt | Angle | M35/TiN |
| | (inch) | (mm) | | | | | | |
| 30° 439 | 0.248 | 6.30 | 0.079 – 0.248 | 0.197 | 2 | 84439063000 | 30° 4839 | 84483906300 |
| | 0.488 | 12.40 | 0.012 – 0.488 | 0.315 | 2-1/2 | 84439124000 | | 84483912400 |
| | 0.650 | 16.50 | 0.157 – 0.650 | 0.394 | 3 | 84439165000 | | 84483916500 |
| | 0.984 | 25.00 | 0.236 – 0.984 | 0.394 | 3-1/2 | 84439250000 | | 84483925000 |
| 60° 432 | 0.248 | 6.30 | 0.051 – 0.248 | 0.197 | 1-7/8 | 84432063000 | 60° 4832 | 84483206300 |
| | 0.327 | 8.30 | 0.071 – 0.327 | 0.236 | 2 | 84432083000 | | 84483208300 |
| | 0.410 | 10.40 | 0.091 – 0.410 | 0.236 | 2 | 84432104000 | | 84483210400 |
| | 0.488 | 12.40 | 0.098 – 0.488 | 0.315 | 2-3/8 | 84432124000 | | 84483212400 |
| | 0.650 | 16.50 | 0.110 – 0.650 | 0.394 | 2-1/2 | 84432165000 | | 84483216500 |
| | 0.807 | 20.50 | 0.118 – 0.807 | 0.940 | 2-3/4 | 84432205000 | | 84483220500 |
| | 0.984 | 25.00 | 0.126 – 0.984 | 0.394 | 3 | 84432250000 | | 84483225000 |
| 1.220 | 31.00 | 0.138 – 1.22 | 0.472 | 3-1/8 | 84432310000 | 84483231000 | | |
| 82° 434 | 0.248 | 6.30 | 0.051 – 0.248 | 0.197 | 1-3/4 | 84434063000 | 82° 4834 | 84483406300 |
| | 1/4 | 6.35 | 0.051 – 0.250 | 1/4 | 1-3/4 | 84434063500 | | 84483406350 |
| | 5/16 | 7.94 | 0.070 – 0.312 | 1/4 | 1-3/4 | 84434079300 | | 84483407930 |
| | 0.327 | 8.30 | 0.070 – 0.327 | 0.236 | 2 | 84434083000 | | 84483408300 |
| | 3/8 | 9.52 | 0.085 – 0.375 | 1/4 | 2 | 84434095200 | | 84483409520 |
| | 0.410 | 10.40 | 0.087 – 0.410 | 0.236 | 2 | 84434104000 | | 84483410400 |
| | 0.488 | 12.40 | 0.098 – 0.488 | 0.315 | 2-1/4 | 84434124000 | | 84483412400 |
| | 1/2 | 12.70 | 0.100 – 0.500 | 1/4 | 2 | 84434127000 | | 84483412700 |
| | 5/8 | 15.87 | 0.110 – 0.625 | 3/8 | 2-3/8 | 84434158700 | | 84483415870 |
| | 0.650 | 16.50 | 0.110 – 0.650 | 0.394 | 2-3/8 | 84434165000 | | 84483416500 |
| | 3/4 | 19.05 | 0.120 – 0.750 | 3/8 | 2-3/8 | 84434190500 | | 84483419050 |
| | 0.807 | 20.50 | 0.118 – 0.807 | 0.394 | 2-1/2 | 84434205000 | | 84483420500 |
| | 0.984 | 25.00 | 0.126 – 0.984 | 0.394 | 2-11/16 | 84434250000 | | 84483425000 |
| | 1.000 | 25.40 | 0.125 – 1.000 | 3/8 | 2-3/4 | 84434254000 | | 84483425400 |
| 1.220 | 31.00 | 0.138 – 1.220 | 0.472 | 2-7/8 | 84434310000 | 84483431000 | | |
| 90° | 0.158 | 4.00 | 0.051 – 0.158 | 0.158 | 1-5/8 | 84431040000 | 90° | 84483104000 |
| | 0.170 | 4.30 | 0.051 – 0.170 | 0.158 | 1-5/8 | 84431043000 | | 84483104300 |
| | 0.197 | 5.00 | 0.051 – 0.197 | 0.158 | 1-5/8 | 84431050000 | | 84483105000 |
| | 0.209 | 5.30 | 0.051 – 0.209 | 0.197 | 1-3/4 | 84431053000 | | 84483105300 |
| | 0.229 | 5.80 | 0.051 – 0.229 | 0.197 | 1-3/4 | 84431058000 | | 84483105800 |
| | 0.236 | 6.00 | 0.051 – 0.236 | 0.197 | 1-3/4 | 84431060000 | | 84483106000 |
| | 0.248 | 6.30 | 0.051 – 0.248 | 0.197 | 1-3/4 | 84431063000 | | 84483106300 |
| | 1/4 | 6.35 | 0.050 – 0.250 | 1/4 | 1-3/4 | 84431063500 | | 84483106350 |
| | 0.276 | 7.00 | 0.063 – 0.279 | 0.236 | 2 | 84431070000 | | 84483107000 |
| | 0.288 | 7.30 | 0.063 – 0.288 | 0.236 | 2 | 84431073000 | | 84483107300 |
| | 5/16 | 7.94 | 0.070 – 0.312 | 1/4 | 1-3/4 | 84431079300 | | 84483107930 |
| | 0.315 | 8.00 | 0.017 – 0.315 | 0.236 | 2 | 84431080000 | | 84483108000 |
| | 0.327 | 8.30 | 0.071 – 0.327 | 0.236 | 2 | 84431083000 | | 84483108300 |
| | 0.354 | 9.00 | 0.079 – 0.354 | 0.236 | 2 | 84431090000 | | 84483109000 |
| | 0.370 | 9.40 | 0.079 – 0.370 | 0.236 | 2 | 84431094000 | | 84483109400 |
| | 3/8 | 9.52 | 0.085 – 0.375 | 1/4 | 3 | 84431095200 | | 84483109520 |
| | 0.394 | 10.00 | 0.087 – 0.394 | 0.236 | 4 | 84431100000 | | 84483110000 |
| | 0.410 | 10.40 | 0.087 – 0.410 | 0.236 | 5 | 84431104000 | | 84483110400 |
| | 0.453 | 11.50 | 0.098 – 0.453 | 0.315 | 2-1/4 | 84431115000 | | 84483111500 |
| | 0.472 | 12.00 | 0.098 – 0.472 | 0.315 | 2-1/4 | 84431120000 | | 84483112000 |
| | 0.488 | 12.40 | 0.098 – 0.488 | 0.315 | 2-1/4 | 84431124000 | | 84483112400 |
| | 1/2 | 12.70 | 0.100 – 0.500 | 1/4 | 2 | 84431127000 | | 84483112700 |
| | 0.528 | 13.40 | 0.098 – 0.528 | 0.315 | 2-1/4 | 84431134000 | | 84483113400 |
| | 0.567 | 14.40 | 0.098 – 0.567 | 0.315 | 2-1/4 | 84431144000 | | 84483114400 |
| | 0.590 | 15.00 | 0.110 – 0.590 | 0.394 | 2-3/8 | 84431150000 | | 84483115000 |
| | 5/8 | 15.87 | 0.110 – 0.625 | 3/8 | 2-3/8 | 84431158700 | | 84483115870 |
| | 0.650 | 16.50 | 0.110 – 0.650 | 0.394 | 2-3/8 | 84431165000 | | 84483116500 |
| | 0.748 | 19.00 | 0.118 – 0.748 | 0.394 | 2-1/2 | 84431190000 | | 84483119000 |
| | 3/4 | 19.05 | 0.120 – 0.750 | 3/8 | 2-3/8 | 84431190500 | | 84483119050 |
| 0.807 | 20.50 | 0.118 – 0.807 | 0.394 | 2-1/2 | 84431205000 | 84483120500 | | |
| 0.906 | 23.00 | 0.126 – 0.906 | 0.394 | 2-5/8 | 84431230000 | 84483123000 | | |
| 0.984 | 25.00 | 0.126 – 0.984 | 0.394 | 2-5/8 | 84431250000 | 84483125000 | | |
| 1.000 | 25.40 | 0.125 – 1.00 | 3/8 | 2-3/4 | 84431254000 | 84483125400 | | |
| 1.024 | 26.00 | 0.126 – 1.024 | 0.394 | 2-5/8 | 84431260000 | 84483126000 | | |
| 1.102 | 28.00 | 0.138 – 1.102 | 0.472 | 2-3/4 | 84431280000 | 84483128000 | | |
| 1.181 | 30.00 | 0.138 – 1.181 | 0.472 | 2-3/4 | 84431300000 | 84483130000 | | |
| 1.220 | 31.00 | 0.138 – 1.220 | 0.472 | 2-3/4 | 84431310000 | 84483131000 | | |




HSS-E Cobalt M35



Countersink



Chamfer

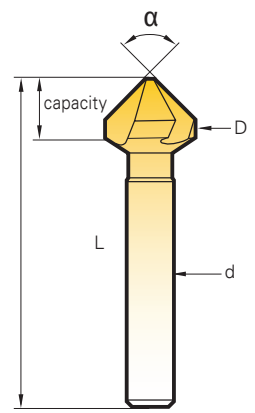

TRI-DENT Imperial

3 Flute Countersinks & Sets

Three Flute Countersinks

| Angle | Diameter | | Capacity min/max | d | L | Cobalt | Angle | M35/TiN |
|-------------|----------|---------------|---------------------|---------|-------------|-------------|--------------|-------------|
| | (inch) | (mm) | | | | | | |
| 100° 435 | 0.248 | 6.30 | 0.051 – 0.248 | 0.197 | 1-3/4 | 84435063000 | 100° 4835 | 84483506300 |
| | 0.327 | 8.30 | 0.070 – 0.327 | 0.236 | 2 | 84435083000 | | 84483508300 |
| | 0.410 | 10.40 | 0.087 – 0.410 | 0.236 | 2 | 84435104000 | | 84483510400 |
| | 0.488 | 12.40 | 0.098 – 0.488 | 0.315 | 2-3/16 | 84435124000 | | 84483512400 |
| | 0.650 | 16.50 | 0.110 – 0.650 | 0.394 | 2-5/16 | 84435165000 | | 84483516500 |
| | 0.807 | 20.50 | 0.118 – 0.807 | 0.394 | 2-7/16 | 84435205000 | | 84483520500 |
| | 0.984 | 25.00 | 0.126 – 0.984 | 0.394 | 2-1/2 | 84435250000 | | 84483525000 |
| 1.220 | 31.00 | 0.138 – 1.220 | 0.472 | 2-11/16 | 84435310000 | 84483531000 | | |
| 120° 433 | 0.248 | 6.30 | 0.051 – 0.248 | 0.197 | 1-3/4 | 84433063000 | 120° 4833 | 84483306300 |
| | 0.327 | 8.30 | 0.070 – 0.327 | 0.236 | 2 | 84433083000 | | 84483308300 |
| | 0.410 | 10.40 | 0.087 – 0.410 | 0.236 | 2 | 84433104000 | | 84483310400 |
| | 0.488 | 12.40 | 0.098 – 0.488 | 0.315 | 2-1/8 | 84433124000 | | 84483312400 |
| | 0.650 | 16.50 | 0.110 – 0.650 | 0.394 | 2-1/4 | 84433165000 | | 84483316500 |
| | 0.807 | 20.50 | 0.118 – 0.807 | 0.394 | 2-5/16 | 84433205000 | | 84483320500 |
| | 0.984 | 25.00 | 0.126 – 0.984 | 0.394 | 2-1/2 | 84433250000 | | 84483325000 |
| 1.220 | 31.00 | 0.138 – 1.220 | 0.472 | 2-1/2 | 84433310000 | 84483331000 | | |



84431000000-M

84431000000 / 84436000000

3 Flute Countersink Sets

| Angle | Cobalt | Composition (mm) |
|-------|-----------------|------------------|
| 60° | 84432000000 | 10.4 16.5 |
| | 84483200000 TiN | |
| 82° | 84434000000 | 20.5 |
| | 84483400000 TiN | |
| 100° | 84435000000 | 25 |
| 120° | 84433000000 | 31 |

Trident Countersink Sets

| Angle | EDP No. | Composition (mm) |
|-------|-----------------|---------------------------------|
| 60° | 84432000000 | Ø 10.4 - 16.5 20.5 - 25 - 31 |
| | 84483200000 TiN | |
| 82° | 84434000000 | |
| | 84483400000 TiN | |
| 100° | 84435000000 | |
| 120° | 84433000000 | |

Countersink Sets - Angle 90°

| EDP No. | Composition |
|-----------------|---|
| 84431000000 | 10.4 - 16.5 - 20.5 - 25.0 - 31.0mm |
| 84483100000 TiN | |
| 84436000000 | |
| 84431000002 | 6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5mm |
| 84483100002 TiN | |
| 84436000002 | |
| 88843100002 | |

TRI-DENT Metric | 60° and 82° Three Flute Countersinks

Applications: **Countersinking and Chamfering**



| Three Flute Countersinks - Angle 60° | | | | DIN 334-C |
|--------------------------------------|--------|-----|----|----------------|
| D (mm) | d1 max | d2 | L | Magaforce 8432 |
| 6.3 | 1.5 | 5 | 47 | 88843206300 |
| 8.3 | 2.0 | 6 | 52 | 88843208300 |
| 10.4 | 2.5 | 6 | 53 | 88843210400 |
| 12.4 | 2.8 | 8* | 60 | 88843212400 |
| 16.5 | 3.2 | 10* | 65 | 88843216500 |
| 20.5 | 3.5 | 10* | 69 | 88843220500 |
| 25.0 | 3.8 | 10* | 75 | 88843225000 |
| 31.0 | 4.2 | 12* | 81 | 88843231000 |



*3 flattened shanks = effective holding

| Three Flute Countersinks - Angle 82° | | | | DIN 334-C |
|--------------------------------------|--------|-----|----|----------------|
| D (mm) | d1 max | d2 | L | Magaforce 8434 |
| 10.4 | 2.5 | 6 | 50 | 88843410400 |
| 12.4 | 2.8 | 8* | 56 | 88843412400 |
| 16.5 | 3.2 | 10* | 61 | 88843416500 |
| 20.5 | 3.5 | 10* | 64 | 88843420500 |
| 25.0 | 3.8 | 10* | 68 | 88843425000 |

*3 flattened shanks = effective holding

| Tolerances | | | |
|------------|-------|----|-------|
| D | Angle | d | L |
| z 9 | - 1° | h9 | ± 1mm |

Carbide = hardness 1800 HV to machine steels over 1300 N/mm², treated steels up to 60 HRC, abrasive tough steels, stainless steels, titanium alloys, hard bronze, inconel, nimonic, waspaloy, hard cast irons and all other metals, thermoplastics, nylon, PVC, laminated, graphite, reinforced polymer with glass or carbon fibers and ceramic glass.

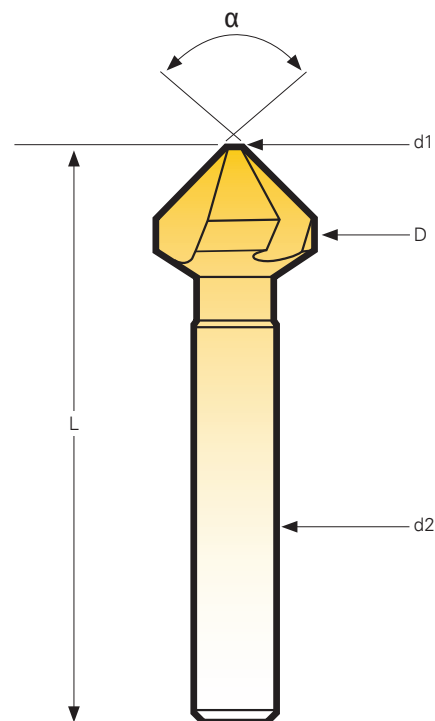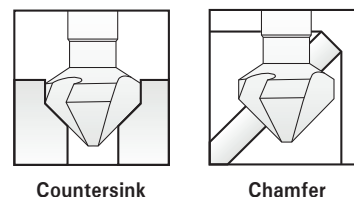


TRI-DENT Metric

90° Three Flute Countersinks

Three Flute Countersinks - Angle 90° Special for abrasion-resistant hard alloys

| Diameter | | Capacity min/max | D | L | Cobalt + 436 | M42/RedX 4936 |
|----------|-------|---------------------|-------|-------|-----------------|------------------|
| (inch) | (mm) | | | | | |
| 0.248 | 6.3 | 0.051 – 0.248 | 0.197 | 1-3/4 | 84436063000 | 84493606300 |
| 0.327 | 8.3 | 0.071 – 0.327 | 0.236 | 1-3/4 | 84436083000 | 84493608300 |
| 0.410 | 10.4 | 0.087 – 0.410 | 0.236 | 1-3/4 | 84436104000 | 84493610400 |
| 0.488 | 12.4 | 0.098 – 0.488 | 0.315 | 2-1/4 | 84436124000 | 84493612400 |
| 0.650 | 16.5 | 0.110 – 0.650 | 0.394 | 2-3/8 | 84436165000 | 84493616500 |
| 0.807 | 20.5 | 0.118 – 0.807 | 0.394 | 2-1/2 | 84436205000 | 84493620500 |
| 0.984 | 25.0 | 0.126 – 0.984 | 0.394 | 2-5/8 | 84436250000 | 84493625000 |
| 1.220 | 31.0 | 0.138 – 1.220 | 0.472 | 2-3/4 | 84436310000 | 84493631000 |
| 1.969 | 50.0* | 0.197 – 1.969 | 0.630 | 5 | 84436500000 | 84493650000 |

*3 flatted shanks



HSS-E 8% COBALT M42


NOTE:

All metric sizes are available. Call customer service for information or to place an order.

Countersinks - Angle 90° 3 Flutes

| Diameter | | Capacity min/max | D | L | Carbide 8431 | K15/Hard-H 8431-H |
|----------|-------|---------------------|-------|--------|-----------------|----------------------|
| (inch) | (mm) | | | | | |
| 0.170 | 4.3 | 0.051 – .0170 | 0.157 | 1-9/16 | 88843104300 | 888431H0430† |
| 0.209 | 5.3 | 0.051 – 0.209 | 0.157 | 1-9/16 | 88843105300 | 888431H0530† |
| 0.248 | 6.3 | 0.051 – 0.248 | 0.197 | 1-3/4 | 88843106300 | 888431H0630† |
| 0.327 | 8.3 | 0.071 – 0.327 | 0.236 | 1-3/4 | 88843108300 | 888431H0830† |
| 0.410 | 10.4 | 0.087 – 0.410 | 0.236 | 1-3/4 | 88843110400 | 888431H1040 |
| 0.488 | 12.4* | 0.098 – 0.488 | 0.315 | 2-1/4 | 88843112400 | 888431H1240 |
| 0.650 | 16.5* | 0.110 – 0.650 | 0.394 | 2-3/8 | 88843116500 | 888431H1650 |
| 0.807 | 20.5* | 0.118 – 0.807 | 0.394 | 2-1/2 | 88843120500 | 888431H2050 |
| 0.984 | 25.0* | 0.126 – 0.984 | 0.394 | 2-5/8 | 88843125000 | 888431H2500 |
| 1.200 | 31.0* | 0.138 – 1.220 | 0.472 | 2-3/4 | 88843131000 | 888431H3100 |


*Ø 12,4 – 31,0 = 3 flatted shanks



K15 SOLID CARBIDE

Long Series - Angle 90°

| Diameter | | Capacity min/max | D | L | Cobalt 4303 | M35/RedX 4933 | Carbide 8431-L |
|----------|------|---------------------|-------|----------|----------------|------------------|-------------------|
| (inch) | (mm) | | | | | | |
| 0.248 | 6.3 | 0.051 – 0.248 | 0.236 | 3-5/16 | 84430316500 | 84493306300 | 888431L0630 |
| 0.327 | 8.3 | 0.071 – 0.327 | 0.315 | 3-3/8 | 84430308300 | 84493308300 | 888431L0830 |
| 0.410 | 10.4 | 0.087 – 0.410 | 0.394 | 3-1/2 | 84430310400 | 84493310400 | 888431L1040 |
| 0.488 | 12.4 | 0.098 – 0.488 | 0.394 | 4-1/4 | 84430312400 | 84493312400 | 888431L1240 |
| 0.650 | 16.5 | 0.110 – 0.650 | 0.630 | 4 - 7/16 | 84430316500 | 84493316500 | 888431L1650 |
| 0.807 | 20.5 | 0.118 – 0.807 | 0.360 | 4-1/2 | 84430320500 | 84493320500 | 888431L2050 |
| 0.984 | 25.0 | 0.126 – 0.984 | 0.788 | 4 -11/16 | 84430325000 | 84493325000 | - |




HSS-E COBALT M35

TRI-DENT


90° Three Flute Countersinks Anti-Vibration

Metric

Applications: **Countersinking and Chamfering**



Countersink




Chamfer

The equal division 3 x 120° of the flutes offers good results in most materials.

For iron alloys, vibrations may happen and generate chatter.

These new **anti-vibration** countersinks with variable pitch flutes avoid this phenomenon.

HSS-E Cobalt = hardness 65 HRC, to machine steels up to 1000N/mm², cast iron up to 180 HB, copper, brass, bronze and aluminum.

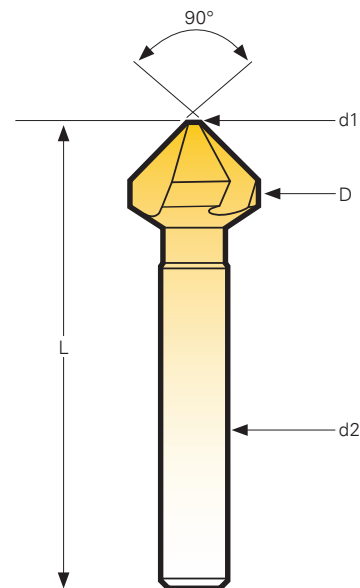

Three Flute Countersinks Anti-Vibration - Angle 90° DIN 334-C

| D (mm) | d1 max | d2 | L | HSS-E 43-A | TiN 483-A |
|--------|--------|----|----|-------------|-------------|
| 4.3 | 1.3 | 4 | 40 | 8443A043000 | 84483A04300 |
| 5.3 | 1.5 | 4 | 40 | 8443A053000 | 84483A05300 |
| 6.0 | 1.5 | 5 | 45 | 8443A060000 | 84483A06000 |
| 6.3 | 1.5 | 5 | 45 | 8443A063000 | 84483A06300 |
| 8.0 | 2.0 | 6 | 50 | 8443A080000 | 84483A08000 |
| 8.3 | 2.0 | 6 | 50 | 8443A083000 | 84483A08300 |
| 9.4 | 2.2 | 6 | 50 | 8443A094000 | 84483A09400 |
| 10.0 | 2.5 | 6 | 50 | 8443A100000 | 84483A10000 |
| 10.4 | 2.5 | 6 | 50 | 8443A104000 | 84483A10400 |
| 11.5 | 2.8 | 8 | 56 | 8443A115000 | 84483A11500 |
| 12.0 | 2.8 | 8 | 56 | 8443A120000 | 84483A12000 |
| 12.4 | 2.8 | 8 | 56 | 8443A124000 | 84483A12400 |
| 15.0 | 3.2 | 10 | 60 | 8443A150000 | 84483A15000 |
| 16.5 | 3.2 | 10 | 60 | 8443A165000 | 84483A16500 |
| 20.5 | 3.5 | 10 | 63 | 8443A205000 | 84483A20500 |
| 25.0 | 3.8 | 10 | 67 | 8443A250000 | 84483A25000 |
| 28.0 | 4 | 12 | 71 | 8443A280000 | 84483A28000 |
| 30.0 | 4.2 | 12 | 71 | 8443A300000 | 84483A30000 |
| 31.0 | 4.2 | 12 | 71 | 8443A310000 | 84483A31000 |

| Value Sets | | | |
|---|--------------|-------|-------------|
| Composition | Quality | Code | EDP No. |
| 5 cutters 10.4, 16.5 20.5, 25, 31 | HSS-E TiN | 43-A | 8443A000000 |
| | | 483-A | 84483A00000 |
| | | | |
| 6 cutters 6.3, 8.3, 10., 12.4, 16.5, 20.5 | HSS-E TiN | 43-A | 8443A000002 |
| | | 483-A | 84483A00002 |
| | | | |



To place an order or to learn more about Pilot Precision Products, contact customer service at 413-350-5200.


Single Flute Chamfering Cutters

| Single Flute Chamfering Cutters ¹ - Angle 90° | | | | | | |
|--|------|------------------|--------------------|-------|-------------|--------------|
| Diameter | | Capacity min/max | d | L | Cobalt 421 | M35/TiN 4821 |
| (inch) | (mm) | | | | | |
| 1/8 | - | 1/32 - 1/8 | 1/8 | 1-1/4 | 84421031700 | 84482103170 |
| 0.157 | 4 | 3/64 - 0.157 | 0.157 | 1-1/2 | 84421040000 | 84482104000 |
| 3/16 | - | 3/64 - 3.160 | 3/16 | 1-3/8 | 84421047600 | 84482104760 |
| 0.197 | 5 | 3/64 - 0.197 | 0.197 | 1-1/2 | 84421050000 | 84482105000 |
| 0.236 | 6 | 3/64 - 0.236 | 0.236 | 1-1/2 | 84421060000 | 84482106000 |
| 1/4 | - | 3/64 - 1/4 | 1/4 | 1-1/2 | 84421063500 | 84482106350 |
| 5/16 | - | 3/64 - 5/16 | 1/4 | 1-5/8 | 84421079300 | 84482107930 |
| 0.315 | 8 | 3/64 - 0.315 | 0.236 | 1-1/2 | 84421080000 | 84482108000 |
| 3/8 | - | 3/64 - 3/8 | 1/4 | 1-3/4 | 84421095200 | 84482109520 |
| 0.394 | 10 | 3/64 - 0.394 | 0.236 | 1-3/4 | 84421100000 | 84482110000 |
| 0.472 | 12 | 5/64 - 0.472 | 0.315 | 2 | 84421120000 | 84482112000 |
| 1/2 | - | 5/64 - 1/2 | 1/4 | 2 | 84421127000 | 84482112700 |
| 0.590 | 15 | 5/64 - 0.590 | 0.315 | 2-1/8 | 84421150000 | 84482115000 |
| 5/8 | - | 5/64 - 5/8 | 3/8 | 2-1/4 | 84421158700 | 84482115870 |
| 3/4 | - | 5/64 - 3/4 | 1/2 | 2-5/8 | 84421190500 | 84482119050 |
| 0.787 | 20 | 5/64 - 0.787 | 0.394 | 2-5/8 | 84421200000 | 84482120000 |
| 7/8 | - | 7/64 - 7/8 | 1/2 | 2-3/4 | 84421222200 | 84482122220 |
| 0.984 | 25 | 1/8 - 0.984 | 0.472 | 3 | 84421250000 | 84482125000 |
| 1 | - | 1/8 - 1.000 | 1/2 | 2-3/4 | 84421254000 | 84482125400 |
| 1.181 | 30 | 1/8 - 1.181 | 0.472 | 3-1/2 | 84421300000 | 84482130000 |
| 1-1/4 | - | 1/8 - 1-1/4 | 1/2 | 2-3/4 | 84421317500 | 84482131750 |
| 1.378 | 35 | 5/32 - 1.378 | 0.630 ¹ | 4 | 84421350000 | 84482135000 |
| 1.575 | 40 | 7/32 - 1.575 | 0.630 ¹ | 4-5/8 | 84421400000 | 84482140000 |
| 2.000 | 50 | 15/32 - 2.000 | 0.630 ¹ | 5 | 84421500000 | 84482150000 |

¹ Shank with 3 flats for better holding



HSS-E Cobalt M35



| Single Flute Chamfering Cutters - Angle 100° | | | | | | |
|--|------|------------------|-------|-------|-------------|--------------|
| Diameter | | Capacity min/max | d | L | Cobalt 425 | M35/TiN 4825 |
| (inch) | (mm) | | | | | |
| 0.394 | 10 | 3/64 - 0.394 | 0.236 | 1-3/4 | 84425100000 | 84482510000 |
| 0.472 | 12 | 5/64 - 0.472 | 0.315 | 1-7/8 | 84425120000 | 84482512000 |
| 0.590 | 15 | 5/64 - 0.590 | 0.315 | 2-1/8 | 84425150000 | 84482515000 |
| 0.787 | 20 | 5/64 - 0.787 | 0.394 | 2-1/2 | 84425200000 | 84482520000 |
| 0.984 | 25 | 1/8 - 0.984 | 0.472 | 3 | 84425250000 | 84482525000 |
| 1.181 | 30 | 1/8 - 1.181 | 0.472 | 3-3/8 | 84425300000 | 84482530000 |



| Single Flute Chamfering Cutters - Angle 120° | | | | | | |
|--|------|------------------|-------|-------|-------------|--------------|
| Diameter | | Capacity min/max | d | L | Cobalt 423 | M35/TiN 4823 |
| (inch) | (mm) | | | | | |
| 0.394 | 10 | 3/64 - 0.394 | 0.236 | 1-3/4 | 84423100000 | 84482310000 |
| 0.472 | 12 | 5/64 - 0.472 | 0.315 | 1-7/8 | 84423120000 | 84482312000 |
| 0.590 | 15 | 5/64 - 0.590 | 0.315 | 2 | 84423150000 | 84482315000 |
| 0.787 | 20 | 5/64 - 0.787 | 0.394 | 2-3/8 | 84423200000 | 84482320000 |
| 0.984 | 25 | 1/8 - 0.984 | 0.472 | 2-7/8 | 84423250000 | 84482325000 |
| 1.181 | 30 | 1/8 - 1.181 | 0.472 | 3-1/4 | 84423300000 | 84482330000 |

| Metric Single Flute Countersink - Sets of 5 Pieces | | | |
|--|-------------|-------------|-------------------|
| Angle | Cobalt | M35/TiN | Composition |
| 60° | 84422000000 | 84482200000 | 10-15-20 25-30 |
| 82° | 84424000000 | 84482400000 | |
| 90° | 84421000000 | 84482100000 | |
| 100° | 84425000000 | 84482500000 | |
| 120° | 84423000000 | 84482300000 | |

| Single Flute Countersink - Sets of 6 Pieces | | | |
|---|-------------|-------------|-------------|
| Angle | Cobalt | M35/TiN | Composition |
| 60° | 84422000006 | 84482200006 | 1/4 - 5/16 |
| 82° | 84424000006 | 84482400006 | 3/8 - 1/2 |
| 90° | 84421000006 | 84482100006 | 5/8 - 3/4 |

90°, 100°,120° Single Flute Chamfering Cutters

The characteristics of the single flute chamfering cutters are similar to those of the deburring tools "with hole." They do vary on the following points:



- Greater countersinking capacity from the point to the outside diameter (up to Ø 30mm)
- Simultaneous drilling and countersinking on thin elements (laminates, aluminum, wood)

Constant finish-grind profile makes it possible to obtain many easy regrinds: a mere touch of the grinder to the tooth is sufficient

We recommend lubricating.



HSS-E Cobalt M35

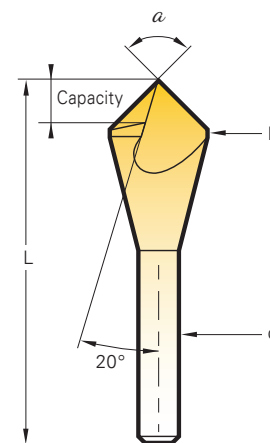


Single Flute Chamfering Cutters - Angles 60° and 82°

| Angle | Diameter | | Capacity min/max | d | L | Cobalt 422 | M35/TiN 4822 |
|-------|----------|-------------|------------------|-------|-------------|-------------|--------------|
| | (inch) | (mm) | | | | | |
| 60° | 1/8 | - | 1/32 - 1/8 | 1/8 | 1-1/4 | 84422031700 | 84482203170 |
| | 3/16 | - | 3/64 - 3/16 | 3/16 | 1-3/8 | 84422047600 | 84482204760 |
| | 0.236 | 6 | 3/64 - 0.236 | 0.236 | 1-5/8 | 84422060000 | 84482206000 |
| | 1/4 | - | 3/64 - 1/4 | 1/4 | 1-1/2 | 84422063500 | 84482206350 |
| | 5/16 | - | 3/64 - 5/16 | 1/4 | 1-5/8 | 84422079300 | 84482207930 |
| | 3/8 | - | 3/64 - 3/8 | 1/4 | 1-3/4 | 84422095200 | 84482209520 |
| | 0.394 | 10 | 3/64 - 0.394 | 0.236 | 1-7/8 | 84422100000 | 84482210000 |
| | 0.472 | 12 | 5/64 - 0.472 | 0.315 | 2-1/8 | 84422120000 | 84482212000 |
| | 1/2 | - | 5/64 - 1/2 | 1/4 | 2 | 84422127000 | 84482212700 |
| | 0.590 | 15 | 5/64 - 0.590 | 0.315 | 2-3/8 | 84422150000 | 84482215000 |
| | 5/8 | - | 5/64 - 5/8 | 3/8 | 2-1/4 | 84422158700 | 84482215870 |
| | 3/4 | - | 5/64 - 3/4 | 1/2 | 2-5/8 | 84422190500 | 84482219050 |
| | 0.787 | 20 | 5/64 - 0.787 | 0.394 | 2-7/8 | 84422200000 | 84482220000 |
| | 7/8 | - | 7/64 - 7/8 | 1/2 | 2-3/4 | 84422222200 | 84482222220 |
| | 0.984 | 25 | 1/8 - 0.984 | 0.472 | 3-3/8 | 84422250000 | 84482225000 |
| | 1 | - | 1/8 - 1 | 1/2 | 2-3/4 | 84422254000 | 84482225400 |
| 1.181 | 30 | 1/8 - 1.181 | 0.472 | 3-5/8 | 84422300000 | 84482230000 | |
| 1-1/4 | - | 1/8 - 1-1/4 | 1/2 | 3 | 84422317500 | 84482231750 | |
| 82° | 1/8 | - | 1/32 - 1/8 | 1/8 | 1-1/4 | 84424031700 | 84482403170 |
| | 3/16 | - | 3/64 - 3/16 | 3/16 | 1-3/8 | 84424047600 | 84482404760 |
| | 0.236 | 6 | 3/64 - 0.236 | 0.236 | 1-5/8 | 84424060000 | 84482406000 |
| | 1/4 | - | 3/64 - 1/4 | 1/4 | 1-1/2 | 84424063500 | 84482406350 |
| | 5/16 | - | 3/64 - 5/16 | 1/4 | 1-5/8 | 84424079300 | 84482407930 |
| | 3/8 | - | 3/64 - 3/8 | 1/4 | 1-3/4 | 84424095200 | 84482409520 |
| | 0.394 | 10 | 3/64 - 0.394 | 0.236 | 1-3/4 | 84424100000 | 84482410000 |
| | 0.472 | 12 | 5/64 - 0.472 | 0.315 | 2 | 84424120000 | 84482412000 |
| | 1/2 | - | 5/64 - 1/2 | 1/4 | 2 | 84424127000 | 84482412700 |
| | 0.590 | 15 | 5/64 - 0.590 | 0.315 | 2-1/4 | 84424150000 | 84482415000 |
| | 5/8 | - | 5/64 - 5/8 | 3/8 | 2-1/4 | 84424158700 | 84482415870 |
| | 3/4 | - | 5/64 - 3/4 | 1/2 | 2-5/8 | 84424190500 | 84482419050 |
| | 0.787 | 20 | 5/64 - 0.787 | 0.394 | 2-5/8 | 84424200000 | 84482420000 |
| | 7/8 | - | 7/64 - 7/8 | 1/2 | 2-3/4 | 84424222200 | 84482422220 |
| | 0.984 | 25 | 1/8 - 0.984 | 0.472 | 3 | 84424250000 | 84482425000 |
| | 1 | - | 1/8 - 1 | 1/2 | 2-3/4 | 84424254000 | 84482425400 |
| 1.181 | 30 | 1/8 - 1.181 | 0.472 | 3-1/2 | 84424300000 | 84482430000 | |
| 1-1/4 | - | 1/8 - 1-1/4 | 1/2 | 2-3/4 | 84424317500 | 84482431750 | |

Note: 30° and 45° angles are metric standard. Call 413-350-5200 for information.


| Tolerances | | | |
|------------|-------|----|-------|
| D | Angle | d | L |
| ± .03 | - 1° | h9 | ± 1mm |

60° & 82° Zero Flute Deburring Tool with Hole



The deburring tool "with hole" is specially designed for countersinking and chamfering light metals and plastics.

The surface obtained is smooth and without burrs. We recommend lubricating.

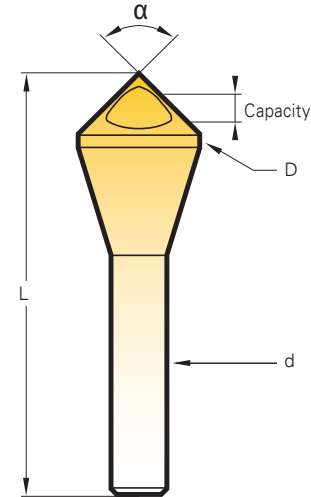

Metric Zero Flute Deburring Tool with Hole - Angle 90°

| # | Diameter (inch) | Diameter (mm) | Capacity min/max | d | L | Cobalt 411 | M352/TiN 4811 |
|---|------------------|---------------|------------------|--------------------|-------|-------------|---------------|
| 0 | 1/4 ¹ | - | 5/64 - 3/16 | 1/4 | 1-3/4 | 84411063500 | 84481106350 |
| | 0.394 | 10 | 5/32 - 11/32 | 0.236 | 1-3/4 | 84411100000 | 84481110000 |
| 1 | 7/16 | - | 7/32 - 13/32 | 1/4 | 1-3/4 | 84411112000 | 84481111200 |
| | 9/16 | - | 1/4 - 1/2 | 1/4 | 2 | 84411140000 | 84481114000 |
| 2 | 0.590 | 15 | 1/4 - 9/16 | 0.315 | 2-1/4 | 84411150000 | 84481115000 |
| | 0.787 | 20 | 5/16 - 11/16 | 0.394 | 2-1/2 | 84411200000 | 84481120000 |
| 3 | 13/16 | - | 5/16 - 11/16 | 1/2 | 2-5/8 | 84411204000 | 84481120400 |
| | 0.984 | 25 | 3/8 - 7/8 | 0.472 | 3 | 84411250000 | 84481125000 |
| 3 | 1.102 | 28 | 7/16 - 1 | 0.472 | 3-3/8 | 84411280000 | 84481128000 |
| | 1.181 | 30 | 1/2 - 1-1/8 | 0.472 | 3-1/2 | 84411300000 | 84481130000 |
| 4 | 1-3/16 | - | 1/2 - 1-1/8 | 1/2 | 3-1/2 | 84411301000 | 84481130100 |
| | 1.378 | 35 | 9/16 - 1-5/16 | 0.630 ² | 4 | 84411350000 | 84481135000 |
| 4 | 1.575 | 40 | 5/8 - 1-1/2 | 0.630 ² | 4-5/8 | 84411400000 | 84481140000 |
| | 1.969 | 50 | 3/4 - 1-7/8 | 0.630 ² | 5 | 84411500000 | 84481150000 |

¹ Double end cutter

² Shanks with 3 flats for better holding

Metric Zero Flute Deburring Tool with Hole - Angles 60°, 82°, 100° and 120°

| Angle | # | Diameter (inch) | Diameter (mm) | Capacity min/max | d | L | Cobalt | |
|-------|-------|-----------------|------------------|------------------|----------------|-------------|--------|-------------|
| 60° | 412 | 0 | 1/4 ¹ | - | 7/64 - 3/16 | 1/4 | 1-3/4 | 84412063500 |
| | | - | 0.394 | 10 | 3/16 - 11/32 | 0.236 | 2 | 84412100000 |
| | | 1 | 7/16 | - | 3/16 - 3/8 | 1/4 | 1-3/4 | 84412112000 |
| | | 2 | 9/16 | - | 9/32 - 1/2 | 1/4 | 2 | 84412140000 |
| | | - | 0.590 | 15 | 5/16 - 9/16 | 0.315 | 2-3/8 | 84412150000 |
| | | - | 0.787 | 20 | 3/8 - 11/16 | 0.394 | 2-7/8 | 84412200000 |
| | | 3 | 13/16 | - | 3/8 - 11/16 | 1/2 | 2-5/8 | 84412204000 |
| | | - | 0.984 | 25 | 1/2 - 7/8 | 0.472 | 3-3/8 | 84412250000 |
| | | - | 1.181 | 30 | 9/16 - 1 - 1/8 | 0.472 | 3-5/8 | 84412300000 |
| | | 4 | 1-3/16 | - | 9/16 - 1 - 1/8 | 1/2 | 3-1/2 | 84412301000 |
| - | 1.378 | 35 | 11/16 - 1 - 5/16 | 0.630 | 4-1/2 | 84412350000 | | |
| 82° | 414 | 0 | 1/4 ¹ | - | 5/64 - 3/16 | 1/4 | 1-3/4 | 84414063500 |
| | | - | 0.394 | 10 | 5/32 - 11/32 | 0.236 | 1-3/4 | 84414100000 |
| | | 1 | 7/16 | - | 7/32 - 13/32 | 1/4 | 1-3/4 | 84414112000 |
| | | 2 | 9/16 | - | 1/4 - 1/2 | 1/4 | 2 | 84414140000 |
| | | - | 0.590 | 15 | 1/4 - 9/16 | 0.315 | 2-1/4 | 84414150000 |
| | | - | 0.787 | 20 | 5/16 - 11/16 | 0.394 | 2-1/2 | 84414200000 |
| | | 3 | 13/16 | - | 5/16 - 11/16 | 1/2 | 2-5/8 | 84414204000 |
| | | - | 0.984 | 25 | 3/8 - 7/8 | 0.472 | 3 | 84414250000 |
| | | - | 1.181 | 30 | 1/2 - 1-1/8 | 0.472 | 3-1/2 | 84414300000 |
| | | 4 | 1-3/16 | - | 1/2 - 1-1/8 | 1/2 | 3-1/2 | 84414301000 |
| - | 1.378 | 35 | 9/16 - 1-5/16 | 0.630 | 4 | 84414350000 | | |
| 100° | 415 | - | 0.394 | 10 | 5/32 - 11/32 | 0.236 | 1-3/4 | 84415100000 |
| | | - | 0.590 | 15 | 1/4 - 9/16 | 0.315 | 2-1/8 | 84415150000 |
| | | - | 0.787 | 20 | 9/32 - 11/16 | 0.394 | 2-1/2 | 84415200000 |
| | | - | 0.984 | 25 | 11/32 - 7/8 | 0.472 | 3 | 84415250000 |
| | | - | 1.181 | 30 | 7/16 - 1-1/16 | 0.472 | 3-3/8 | 84415300000 |
| | | - | 1.387 | 35 | 1/2 - 1-5/16 | 0.630 | 4 | 84415350000 |
| 120° | 413 | - | 0.394 | 10 | 5/32 - 11/32 | 0.236 | 1-3/4 | 84413100000 |
| | | - | 0.590 | 15 | 1/4 - 9/16 | 0.315 | 2 | 84413150000 |
| | | - | 0.787 | 20 | 9/32 - 11/16 | 0.394 | 2-3/8 | 84413200000 |
| | | - | 0.984 | 25 | 11/32 - 7/8 | 0.472 | 2-7/8 | 84413250000 |
| | | - | 1.181 | 30 | 7/16 - 1-1/16 | 0.472 | 3-1/4 | 84413300000 |
| | | - | 1.378 | 35 | 1/2 - 1-5/16 | 0.630 | 3-3/4 | 84413350000 |

¹ Double end cutter

² Shanks with 3 flats for better holding

Tolerances

| D | Angle | d | L |
|-------|-------|----|-------|
| ± .03 | - 1° | h9 | ± 1mm |



Metric Single Flute Countersink Sets - 5 pieces

| Angle | EDP No. | Composition |
|-------|-----------------|---------------------|
| 60° | 84412000000 | Ø 10-15-20-25-30 mm |
| | 84412000005 | # 0-1-2-3-4 |
| 82° | 84414000000 | Ø 10-15-20-25-30 mm |
| | 84414000005 | # 0-1-2-3-4 |
| 90° | 84411000000 | Ø 10-15-20-25-30 mm |
| | 84481100000-TiN | Ø 10-15-20-25-30 mm |
| | 84411000002 | Ø 10-15-20-28-35 mm |
| | 84411000005 | # 0-1-2-3-4 |
| | 84481100005-TiN | # 0-1-2-3-4 |
| 100° | 84415000000 | Ø 10-15-20-25-30 mm |
| 120° | 84413000000 | Ø 10-15-20-25-30 mm |



Deburring Countersinking - Performance

Performance

Use Recommendations

Example:

3/4" - .750 Diameter 3 Flute to Countersink 304 SS

SFM = Speed : Surface Feet Per Minute

IPM = Feed : Inches Per Minute

RPM = $\frac{SFM \times 12}{3.14 \times Diameter}$

$$RPM = \frac{45 \times 12}{3.14 \times .75} = \frac{540}{2.35} = 230 \text{ RPM}$$

| | | Deburring Countersinking | | | | | | | | | | Contouring | | | | | | | | |
|--------------------------------|-----|--------------------------|---------|--------------------|---------|------------------|---------|-----------------------|---------|----------------------------|---------|------------------|---------|-----------------------|---------|----------------------------|---------|---------|-----|-----|
| | | | | | | | | | | | | | | | | | | | | |
| | | Recommendation N°1 | | Recommendation N°2 | | | | | | | | | | | | | | | | |
| Material | | HSS. Co =+TiN | | HSS. Co =+TiN | | HSS. Co =+TiN | | HSS. .8% Co +Red'X | | Carbure/Carbide +Hard'X | | HSS. Co =+TiN | | HSS. .8% Co +Red'X | | Carbure/Carbide +Hard'X | | | | |
| | SFM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM | IPM |
| Steel < 81 HRB (B) | Ø10 | IPM | 6.5 | 6.5 | 6.5 | 6.5 | 3.4 | 3.4 | 6.5 | 6.5 | 10.0 | 10.0 | 3.4 | 3.4 | 6.5 | 6.5 | 10.0 | 10.0 | | |
| | Ø20 | IPM | 3.4 | 3.4 | 3.4 | 3.4 | 1.8 | 1.8 | 3.4 | 3.4 | 5.0 | 5.0 | 1.8 | 1.8 | 3.4 | 3.4 | 5.0 | 5.0 | | |
| | Ø30 | IPM | 2.0 | 2.0 | 2.0 | 2.0 | 1.2 | 1.2 | 2.0 | 2.0 | 3.4 | 3.4 | 1.2 | 1.2 | 2.0 | 2.0 | 3.4 | 3.4 | | |
| Steel < 24 Rc | SFM | | 65-95 | 65-95 | 65-95 | 65-95 | 32-48 | 32-48 | 65-95 | 65-95 | 95-160 | 95-160 | 32-48 | 32-48 | 65-95 | 65-95 | 95-160 | 95-160 | | |
| | Ø10 | IPM | 4.3 | 4.3 | 4.3 | 4.3 | 2.4 | 2.4 | 4.3 | 4.3 | 6.6 | 6.6 | 2.4 | 2.4 | 4.3 | 4.3 | 6.6 | 6.6 | | |
| | Ø20 | IPM | 2.0 | 2.0 | 2.0 | 2.0 | 1.2 | 1.2 | 2.0 | 2.0 | 3.4 | 3.4 | 1.2 | 1.2 | 2.0 | 2.0 | 3.4 | 3.4 | | |
| Steel 24 - 32 Rc | Ø30 | IPM | 1.4 | 1.4 | 1.4 | 1.4 | 0.8 | 0.8 | 1.4 | 1.4 | 2.4 | 2.4 | 0.8 | 0.8 | 1.4 | 1.4 | 2.4 | 2.4 | | |
| | SFM | | 48-64 | 48-64 | 48-64 | 48-64 | 25-38 | 25-38 | 48-64 | 48-64 | 64-128 | 64-128 | 25-38 | 25-38 | 48-64 | 48-64 | 64-128 | 64-128 | | |
| | Ø10 | IPM | 2.0 | 2.0 | 2.0 | 2.0 | 1.4 | 1.4 | 2.0 | 2.0 | 4.0 | 4.0 | 1.4 | 1.4 | 2.0 | 2.0 | 4.0 | 4.0 | | |
| Stainless Steel 32 - 41 Rc | Ø20 | IPM | 1.4 | 1.4 | 1.4 | 1.4 | 1.0 | 1.0 | 1.4 | 1.4 | 2.4 | 2.4 | 1.0 | 1.0 | 1.4 | 1.4 | 2.4 | 2.4 | | |
| | Ø30 | IPM | 1.0 | 1.0 | 1.0 | 1.0 | 0.6 | 0.6 | 1.0 | 1.0 | 1.8 | 1.8 | 0.6 | 0.6 | 1.0 | 1.0 | 1.8 | 1.8 | | |
| | SFM | | 38-48 | 38-48 | 38-48 | 38-48 | 20-32 | 20-32 | 38-48 | 38-48 | 64-128 | 64-128 | 20-32 | 20-32 | 38-48 | 38-48 | 64-128 | 64-128 | | |
| Abrasion Resistant Steel | Ø10 | IPM | | | | | | | | | 1.6 | 2.0 | 2.0 | | | | | 1.6 | 2.0 | 2.0 |
| | Ø20 | IPM | | | | | | | | | 1.2 | 1.4 | 1.4 | | | | | 1.2 | 1.4 | 1.4 |
| | Ø30 | IPM | | | | | | | | | 0.8 | 1.0 | 1.0 | | | | | 0.8 | 1.0 | 1.0 |
| Inconel | SFM | | | | | | | | 13-20 | 13-20 | 32-38 | 32-38 | | | 13-20 | 13-20 | 32-38 | 32-38 | | |
| | Ø10 | IPM | | | | | | | 0.6 | 0.6 | 1.2 | 1.2 | | | 0.6 | 0.6 | 1.2 | 1.2 | | |
| | Ø20 | IPM | | | | | | | 0.3 | 0.3 | 0.6 | 0.6 | | | 0.3 | 0.3 | 0.6 | 0.6 | | |
| Cast Iron | Ø30 | IPM | | | | | | | 0.3 | 0.3 | 0.4 | 0.4 | | | 0.3 | 0.3 | 0.4 | 0.4 | | |
| | SFM | | 64-128 | 64-128 | 64-128 | 64-128 | 48-80 | 48-80 | 64-128 | 64-128 | 128-256 | 128-256 | 48-80 | 48-80 | 64-128 | 64-128 | 128-256 | 128-256 | | |
| | Ø10 | IPM | 5.0 | 5.0 | 5.0 | 5.0 | 2.8 | 2.8 | 5.0 | 5.0 | 0.3 | 0.3 | 2.8 | 2.8 | 5.0 | 5.0 | 0.3 | 0.3 | | |
| Aluminium | Ø20 | IPM | 3.0 | 3.0 | 3.0 | 3.0 | 1.6 | 1.6 | 3.0 | 3.0 | 6.0 | 6.0 | 1.6 | 1.6 | 3.0 | 3.0 | 6.0 | 6.0 | | |
| | Ø30 | IPM | 2.0 | 2.0 | 2.0 | 2.0 | 1.2 | 1.2 | 2.0 | 2.0 | 4.0 | 4.0 | 1.2 | 1.2 | 2.0 | 2.0 | 4.0 | 4.0 | | |
| | SFM | | 160-190 | 160-190 | 160-190 | 160-190 | 112-145 | 112-145 | 160-190 | 160-190 | 128-320 | 128-320 | 112-145 | 112-145 | 160-190 | 160-190 | 128-320 | 128-320 | | |
| Bronze Brass | Ø10 | IPM | 10.0 | 10.0 | 10.0 | 10.0 | 7.8 | 7.8 | 10.0 | 10.0 | 13.8 | 13.8 | 7.8 | 7.8 | 10.0 | 10.0 | 13.8 | 13.8 | | |
| | Ø20 | IPM | 7.0 | 7.0 | 7.0 | 7.0 | 5.2 | 5.2 | 7.0 | 7.0 | 9.0 | 9.0 | 5.2 | 5.2 | 7.0 | 7.0 | 9.0 | 9.0 | | |
| | Ø30 | IPM | 6.0 | 6.0 | 6.0 | 6.0 | 4.3 | 4.3 | 6.0 | 6.0 | 7.8 | 7.8 | 4.3 | 4.3 | 6.0 | 6.0 | 7.8 | 7.8 | | |
| Copper | SFM | | 96-128 | 96-128 | 96-128 | 96-128 | 65-95 | 65-95 | 96-128 | 96-128 | | | 65-95 | 65-95 | 96-128 | 96-128 | | | | |
| | Ø10 | IPM | 6.0 | 6.0 | 6.0 | 6.0 | 4.7 | 4.7 | 6.0 | 6.0 | | | 4.7 | 4.7 | 6.0 | 6.0 | | | | |
| | Ø20 | IPM | 4.3 | 4.3 | 4.3 | 4.3 | 3.4 | 3.4 | 4.3 | 4.3 | | | 3.4 | 3.4 | 4.3 | 4.3 | | | | |
| Laminated | Ø30 | IPM | 3.5 | 3.5 | 3.5 | 3.5 | 2.8 | 2.8 | 3.5 | 3.5 | | | 2.8 | 2.8 | 3.5 | 3.5 | | | | |
| | SFM | | 65-95 | 65-95 | 65-95 | 65-95 | 48-80 | 48-80 | 65-95 | 65-95 | 160-256 | 160-256 | 48-80 | 48-80 | 65-95 | 65-95 | 160-256 | 160-256 | | |
| | Ø10 | IPM | 4.7 | 4.7 | 4.7 | 4.7 | 3.75 | 3.75 | 4.7 | 4.7 | 12.0 | 12.0 | 3.75 | 3.75 | 4.7 | 4.7 | 12.0 | 12.0 | | |
| Nylon, PVC Plastics | Ø20 | IPM | 3.0 | 3.0 | 3.0 | 3.0 | 2.4 | 2.4 | 3.0 | 3.0 | 7.8 | 7.8 | 2.4 | 2.4 | 3.0 | 3.0 | 7.8 | 7.8 | | |
| | Ø30 | IPM | 2.6 | 2.6 | 2.6 | 2.6 | 1.8 | 1.8 | 2.6 | 2.6 | 7.0 | 7.0 | 1.8 | 1.8 | 2.6 | 2.6 | 7.0 | 7.0 | | |
| | SFM | | 160-320 | 160-320 | 160-320 | 160-320 | 112-224 | 112-224 | 112-224 | 112-224 | | | 112-224 | 112-224 | 112-224 | 112-224 | | | | |
| Nylon, PVC Plastics | Ø10 | IPM | 16.0 | 16.0 | 16.0 | 16.0 | 12.0 | 12.0 | 12.0 | 12.0 | | | 12.0 | 12.0 | 12.0 | 12.0 | | | | |
| | Ø20 | IPM | 12.0 | 12.0 | 12.0 | 12.0 | 7.8 | 7.8 | 7.8 | 7.8 | | | 7.8 | 7.8 | 7.8 | 7.8 | | | | |
| | Ø30 | IPM | 10.0 | 10.0 | 10.0 | 10.0 | 6.0 | 6.0 | 6.0 | 6.0 | | | 6.0 | 6.0 | 6.0 | 6.0 | | | | |
| Nylon, PVC Plastics | SFM | | 160-320 | 160-320 | 160-320 | 160-320 | 112-224 | 112-224 | 112-224 | 112-224 | | | 112-224 | 112-224 | 112-224 | 112-224 | | | | |
| | Ø10 | IPM | 18.0 | 18.0 | 18.0 | 18.0 | 16.0 | 16.0 | 16.0 | 16.0 | | | 16.0 | 16.0 | 16.0 | 16.0 | | | | |
| | Ø20 | IPM | 13.8 | 13.8 | 13.8 | 13.8 | 12.0 | 12.0 | 12.0 | 12.0 | | | 12.0 | 12.0 | 12.0 | 12.0 | | | | |
| Nylon, PVC Plastics | Ø30 | IPM | 12.0 | 12.0 | 12.0 | 12.0 | 10.0 | 10.0 | 10.0 | 10.0 | | | 10.0 | 10.0 | 10.0 | 10.0 | | | | |

TRI-DENT


Hand Countersinks

Countersinks with 3 Flatted Shanks* - Angle 90°

| Diameter | | Capacity min/max | d | L | Cobalt 437 | M35/TiN 4837 |
|----------|------|------------------|-------|---------|-------------|--------------|
| (inch) | (mm) | | | | | |
| 0.488 | 12.4 | 0.098 – 0.488 | 0.315 | 2 - 1/4 | 84437124000 | 84483712400 |
| 0.597 | 14.4 | 0.098 – 0.597 | 0.315 | 2 - 1/4 | 84437144000 | 84483714400 |
| 0.650 | 16.5 | 0.110 – 0.650 | 0.394 | 2 - 3/8 | 84437165000 | 84483716500 |
| 0.807 | 20.5 | 0.118 – 0.807 | 0.394 | 2 - 1/2 | 84437205000 | 84483720500 |
| 0.984 | 25.0 | 0.126 – 0.984 | 0.394 | 2 - 5/8 | 84437250000 | 84483725000 |
| 1.220 | 31.0 | 0.138 – 1.220 | 0.472 | 2 - 3/4 | 84437310000 | 84483731000 |
| 1.339 | 34.0 | 0.177 – 1.339 | 0.630 | 4 | 84437340000 | 84483734000 |
| 1.378 | 35.0 | 0.177 – 1.378 | 0.630 | 4 | 84437350000 | 84483735000 |
| 1.457 | 37.0 | 0.177 – 1.457 | 0.630 | 4 - 5/8 | 84437370000 | 84483737000 |
| 1.575 | 40.0 | 0.177 – 1.575 | 0.630 | 4 - 5/8 | 84437400000 | 84483740000 |
| 1.969 | 50.0 | 0.197 – 1.969 | 0.630 | 5 | 84437500000 | 84483750000 |
| 2.480 | 63.0 | 0.394 – 2.480 | 0.630 | 5 - 1/2 | 84437630000 | 84483763000 |
| 3.150 | 80.0 | 0.551 – 3.150 | 0.630 | 6 - 1/2 | 84437800000 | 84483780000 |

This highly productive countersinking cutter is a much-improved version of the traditional multiflute milling cutter. It offers the following benefits:

- Grooves opened wide to allow for greater chip removal
- High positive cut
- Constant profile relief (for many regrinds)
- Self-centering countersink
- Work without vibration



Tool dimensions are adapted to countersink the 82° and 90° caps crews. Lubrication is recommended.



Hand Countersinks - HSS-E Cobalt M35

| Diameter | | Capacity min/max | Angle 82° Cobalt 438 | Angle 90° Cobalt 430 |
|----------|------|------------------|----------------------|----------------------|
| (inch) | (mm) | | | |
| 0.488 | 12.4 | 0.118 – 0.488 | 84438124000 | 84430124000 |
| 0.650 | 16.5 | 0.157 – 0.650 | 84438165000 | 84430165000 |
| 0.807 | 20.5 | 0.157 – 0.807 | 84438205000 | 84430205000 |
| 0.984 | 25.0 | 0.197 – 0.984 | 84438250000 | 84430250000 |
| 1.220 | 31.0 | 0.197 – 1.220 | 84438310000 | 84430310000 |

Universal Auto-Lock Chuck

| Handle | Capacity min/max | EDP No. |
|-----------|------------------|-------------|
| Ergonomic | 3/64 – 8mm | 84400200000 |
| Large | 3/64 – 1/2" | 84400100000 |

To hold any straight shank tool, for use by hand.



Hand Countersink Sets - HSS-E Cobalt M35

| | |
|------------------------------|---|
| 84431000003 ¹ | 6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 - 25mm |
| 84431000004 ¹ | 4.3 - 5.3 - 6.3 - 8.3 - 10.4 - 12.4 - 16.5 - 20.5 - 25 - 31mm |
| 88843100000 | 10.4 - 16.5 - 20.5 - 25.0 - 31 mm carbide |
| 84431000006 ² | 6.3 - 12.4 - 16.5 - 20.5mm |
| 84483100006 TiN ² | 6.3 - 12.4 - 16.5 - 20.5mm |

¹ Set supplied with 1 auto-lock chuck handle Code 4001

² Set supplied with 8mm auto-lock chuck handle Code 4002

Auto Body Drill Bits to Disconnect Spot Welds

Hard'X
AlTiN Latuma



The machining of hard sheets has to be done with coated tools.
The high-performance series **8203-H** is made from **Hard'X** coated carbide.

- Easy to start
- Long lasting
- Will spot and drill one panel only, without walking


These short drills are specially designed to be used with these two types of hand type pneumatic disconnecter tools:

- With swan-neck = Magafor 202
- With revolver-handle = Magafor 203

Flatted shanks with 60° taper for a good location in the disconnecter.

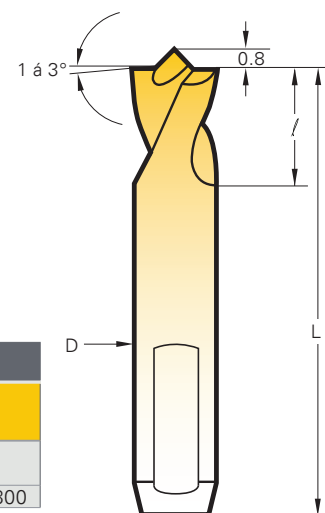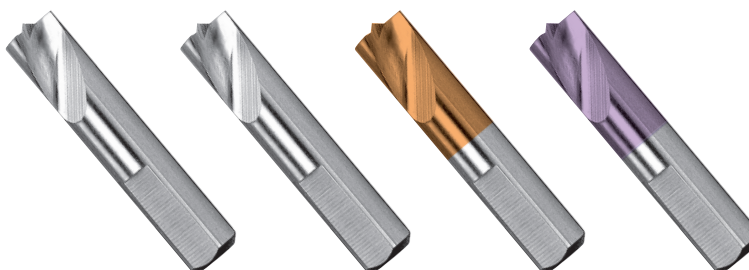

| Short Series | | | | Cobalt 202 | Cobalt 203 | M35/Red'X 2903 | K15/Hard'X 8203-H |
|--------------|------|-------|-------|-------------|-------------|----------------|-------------------|
| Diameter | | L | / | | | | |
| (inch) | (mm) | | | | | | |
| 0.236 | 6 | 1-3/4 | 0.590 | - | 82203060000 | - | - |
| 5/16 | 8 | 1-1/2 | 0.590 | 82202080000 | - | - | - |
| 5/16 | 8 | 1-3/4 | 0.590 | - | 82203080000 | 82290308000 | 888203H0800 |



| Long Series | | | | | | |
|-------------|------|-------|-------|-------------|----------------|---------------------|
| Diameter | | d | L | Cobalt 201 | M35/Red'X 2901 | Brazed Carbide 8201 |
| (inch) | (mm) | | | | | |
| 0.236 | 6 | 2-5/8 | 1.100 | 82201060000 | 82290106000 | - |
| 0.275 | 7 | 2-7/8 | 1.340 | 82201070000 | 82290107000 | - |
| 0.314 | 8 | - | - | - | - | 88820108000 |
| 5/16 | - | 3-1/8 | 1.450 | 82201080000 | 82290108000 | - |
| 0.394 | 10 | 3-1/2 | 1.690 | 82201100000 | 82290110000 | - |

| Tolerances | | |
|------------|-----|----|
| D | L | / |
| h8 | ± 1 | +1 |

The centering point grants perfect drilling without any drifting or walking. Thanks to the special sharpening, the first sheet will be bored without damage to the second one. This design allows for excellent penetration, a high resistance to wear and a great many regrinds. The carbide spot-weld drills are designed to machine the new, very-high elastic limit sheet metal (VHEL).


High Precision Reamers

How to Choose Standard Inch Reamers

| Examples | Reaming (Hole) | | Tolerance (inch) | Reamer (Tool) | |
|----------|----------------|----------------------|--------------------|--------------------------------------|--------------------|
| | Ø | | | Ø | Tolerance-inch |
| 1 | 1/64" | +0.00006 -0.00012 | 0.01568 0.01550 | EDP No. 861000395 0.01551" | 0.01559 0.01551 |
| 2 | 1/32" | +0.0001 -0.0002 | 0.03135 0.03105 | EDP No. 86000079 0.03110" | 0.03122 0.03110 |
| 3 | 1/16" | +0.0004 -0.0001 | 0.0629 0.0624 | EDP No. 86000159 0.0626" | 0.06272 0.06260 |




Example 3 Explanation

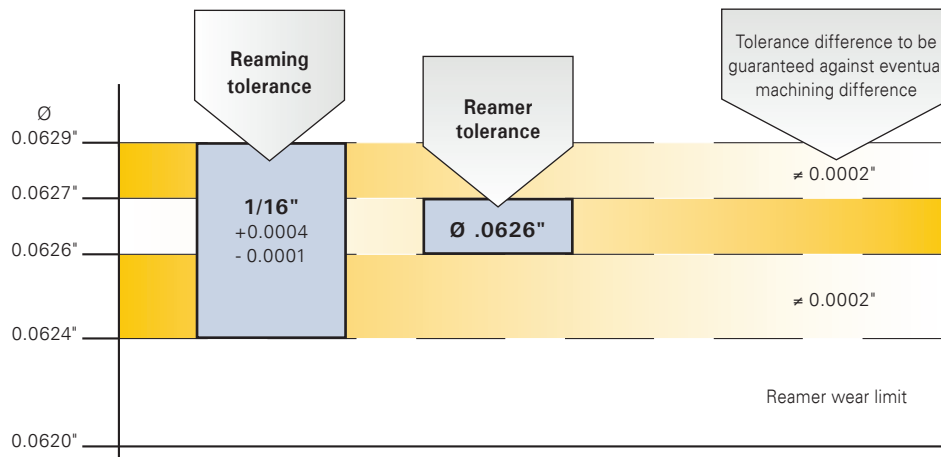

How to Choose Metric Reamers Code 8610 – 8600 : page 85–91


| Tolerance | Ø 2 | Ø 3 | Ø 4 | Ø 5 | Ø 6 | Ø 8 | Ø 10 | Ø 12 | Ø 14 |
|-----------|------|-------------|------|-------------|------|------|-------------|-------|-------|
| D 10 | 2.04 | 3.04 | 4.05 | 5.06 | 6.06 | 8.07 | 10.08 | 12.10 | 14.10 |
| E 8 | 2.02 | 3.02 | 4.03 | 5.03 | 6.03 | 8.03 | 10.03 | 12.04 | 14.04 |
| E 9 | 2.03 | 3.03 | 4.04 | 5.04 | 6.04 | 8.05 | 10.05 | 12.06 | 14.06 |
| F 7 | 2.01 | 3.01 | 4.01 | 5.01 | 6.01 | 8.02 | 10.02 | 12.02 | 14.02 |
| F 8 | 2.01 | 3.01 | 4.02 | 5.02 | 5.02 | 8.02 | 10.02 | 12.03 | 14.03 |
| G 7 | 2.00 | 3.00 | 4.01 | 5.02 | 5.02 | 8.01 | 10.01 | 12.01 | 14.01 |
| H 6 | 2.00 | 3.01 | 4.00 | 5.00 | 6.00 | 8.00 | 10.00 | 12.00 | 14.00 |
| H 8 | 2.01 | 3.01 | 4.01 | 5.01 | 6.01 | 8.01 | 10.01 | 12.01 | 14.01 |
| H 9 | 2.01 | 2.99 | 4.02 | 5.02 | 6.02 | 8.02 | 10.02 | 12.03 | 14.03 |
| M 7 | 1.99 | 2.99 | 3.99 | 4.99 | 5.99 | 7.99 | 9.99 | 11.99 | 13.99 |
| N 7 | 1.99 | 2.99 | 3.99 | 4.99 | 5.99 | 7.98 | 9.98 | 11.98 | 13.98 |
| P 7 | 1.99 | 2.99 | 3.98 | 4.98 | 5.98 | 7.98 | 9.98 | 11.97 | 13.97 |
| R 7 | 1.98 | 2.98 | 3.98 | 4.98 | 5.98 | 7.98 | 9.98 | 11.97 | 13.97 |

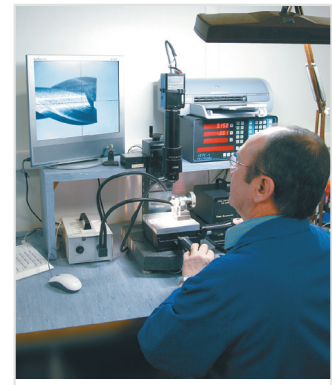

Reamers with Coolant Thru for Blind Holes

8670 Series

*Floating Holders available on pg. 73

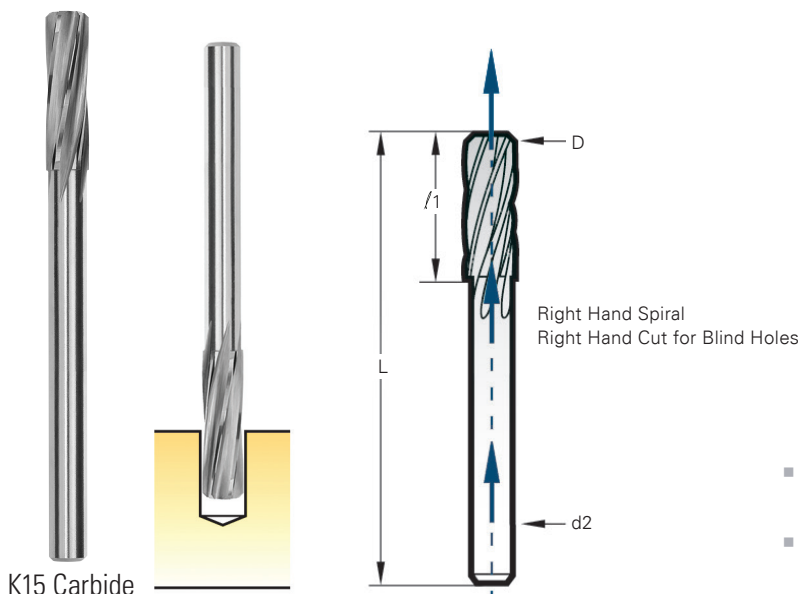


K15 Carbide

- Central oil feeding: the lubricant is fed directly into the hole to ream
- Right hand spiral - improved removal of swarf and coolant flow

| 8670 Series | | | | | | |
|-------------|----------|-------|------|-------|--------|-----------|
| EDP No. | Diameter | | L | f1 | d2 | Wire/Frac |
| | (inch) | (mm) | | | | |
| 88867003900 | 0.1535 | 3.90 | 2.05 | 0.787 | 0.1575 | |
| 88867004000 | 0.1575 | 4.00 | 2.05 | 0.787 | 0.1575 | |
| 88867004100 | 0.1614 | 4.10 | 2.05 | 0.787 | 0.1575 | |
| 88867004200 | 0.1654 | 4.20 | 2.05 | 0.787 | 0.1575 | |
| 88867004300 | 0.1693 | 4.30 | 2.05 | 0.787 | 0.1575 | |
| 88867004400 | 0.1732 | 4.40 | 2.05 | 0.787 | 0.1575 | |
| 88867004500 | 0.1772 | 4.50 | 2.05 | 0.787 | 0.1575 | |
| 88867004600 | 0.1811 | 4.60 | 2.05 | 0.787 | 0.1575 | |
| 88867004700 | 0.1850 | 4.70 | 2.05 | 0.787 | 0.1575 | |
| 88867004762 | 0.1875 | 4.762 | 2.05 | 0.787 | 0.1575 | 3/16" |
| 88867004800 | 0.1890 | 4.80 | 2.48 | 0.866 | 0.1575 | |
| 88867004900 | 0.1929 | 4.90 | 2.48 | 0.866 | 0.1575 | |
| 88867005000 | 0.1969 | 5.00 | 2.48 | 0.866 | 0.1575 | |
| 88867005100 | 0.2008 | 5.10 | 2.48 | 0.866 | 0.1575 | |
| 88867005200 | 0.2047 | 5.20 | 2.48 | 0.866 | 0.1575 | |
| 88867005300 | 0.2087 | 5.30 | 2.48 | 0.866 | 0.1575 | |
| 88867005400 | 0.2126 | 5.40 | 2.48 | 0.866 | 0.1575 | |
| 88867005500 | 0.2165 | 5.50 | 2.48 | 0.866 | 0.1575 | |
| 88867005600 | 0.2205 | 5.60 | 2.48 | 0.866 | 0.1575 | |
| 88867005700 | 0.224 | 5.70 | 2.48 | 0.866 | 0.1575 | |
| 88867005800 | 0.2284 | 5.80 | 2.48 | 0.866 | 0.1575 | |
| 88867005900 | 0.2323 | 5.90 | 2.48 | 0.866 | 0.1969 | |
| 88867006000 | 0.2362 | 6.00 | 2.48 | 0.866 | 0.1969 | |
| 88867006100 | 0.2402 | 6.10 | 2.48 | 0.866 | 0.1969 | |
| 88867006200 | 0.2241 | 6.20 | 2.48 | 0.866 | 0.1969 | |
| 88867006300 | 0.2480 | 6.30 | 2.48 | 0.866 | 0.1969 | |
| 88867006350 | 0.2500 | 6.35 | 2.48 | 0.866 | 0.1969 | E / 1/4" |
| 88867006400 | 0.2520 | 6.40 | 2.48 | 0.866 | 0.1969 | |
| 88867006500 | 0.2259 | 6.50 | 2.48 | 0.866 | 0.1969 | |
| 88867006600 | 0.2598 | 6.60 | 2.48 | 0.866 | 0.1969 | |
| 88867006700 | 0.2638 | 6.70 | 2.80 | 0.984 | 0.248 | |
| 88867006800 | 0.2677 | 6.80 | 2.80 | 0.984 | 0.248 | |
| 88867006900 | 0.2717 | 6.90 | 2.80 | 0.984 | 0.248 | |
| 88867007000 | 0.2756 | 7.00 | 2.80 | 0.984 | 0.248 | |
| 88867007100 | 0.2795 | 7.10 | 2.80 | 0.984 | 0.248 | |
| 88867007200 | 0.2835 | 7.20 | 2.80 | 0.984 | 0.248 | |
| 88867007300 | 0.2874 | 7.30 | 2.80 | 0.984 | 0.248 | |
| 88867007400 | 0.2913 | 7.40 | 2.80 | 0.984 | 0.248 | |
| 88867007500 | 0.2756 | 7.50 | 2.80 | 0.984 | 0.248 | |
| 88867007600 | 0.2992 | 7.60 | 2.80 | 0.984 | 0.248 | |
| 88867007700 | 0.3031 | 7.70 | 2.80 | 0.984 | 0.248 | |
| 88867007800 | 0.3071 | 7.80 | 2.80 | 0.984 | 0.248 | |
| 88867007900 | 0.3110 | 7.90 | 2.80 | 0.984 | 0.248 | |
| 88867007937 | 0.3125 | 7.937 | 2.80 | 0.984 | 0.248 | 5/16" |

| 8670 Series | | | | | | |
|-------------|----------|--------|------|-------|-------|-----------|
| EDP No. | Diameter | | L | f1 | d2 | Wire/Frac |
| | (inch) | (mm) | | | | |
| 88867008000 | 0.3150 | 8.00 | 2.80 | 0.984 | 0.248 | |
| 88867008100 | 0.3189 | 8.10 | 2.80 | 0.984 | 0.248 | |
| 88867008200 | 0.3328 | 8.20 | 2.80 | 0.984 | 0.248 | |
| 88867008300 | 0.3268 | 8.30 | 2.80 | 0.984 | 0.248 | |
| 88867008400 | 0.3307 | 8.40 | 2.80 | 0.984 | 0.248 | |
| 88867008500 | 0.3346 | 8.50 | 2.80 | 0.984 | 0.248 | |
| 88867008600 | 0.3386 | 8.60 | 2.80 | 0.984 | 0.315 | |
| 88867008700 | 0.3425 | 8.70 | 2.80 | 0.984 | 0.315 | |
| 88867008800 | 0.3465 | 8.80 | 2.80 | 0.984 | 0.315 | |
| 88867008900 | 0.3504 | 8.90 | 2.80 | 0.984 | 0.315 | |
| 88867009000 | 0.3543 | 9.00 | 2.80 | 0.984 | 0.315 | |
| 88867009100 | 0.3583 | 9.10 | 2.80 | 0.984 | 0.315 | |
| 88867009200 | 0.3543 | 9.20 | 2.80 | 0.984 | 0.315 | |
| 88867009300 | 0.3661 | 9.30 | 2.80 | 0.984 | 0.315 | |
| 88867009400 | 0.3701 | 9.40 | 2.80 | 0.984 | 0.315 | |
| 88867009500 | 0.3740 | 9.50 | 2.80 | 0.984 | 0.315 | |
| 88867009525 | 0.3750 | 9.525 | 2.80 | 0.984 | 0.315 | 3/8" |
| 88867009600 | 0.3780 | 9.60 | 2.80 | 0.984 | 0.315 | |
| 88867009700 | 0.3819 | 9.70 | 2.80 | 0.984 | 0.315 | |
| 88867009800 | 0.3858 | 9.80 | 2.80 | 0.984 | 0.315 | |
| 88867009900 | 0.3897 | 9.90 | 2.80 | 0.984 | 0.315 | |
| 88867010000 | 0.3937 | 10.00 | 2.80 | 0.984 | 0.315 | |
| 88867010100 | 0.3976 | 10.10 | 2.80 | 0.984 | 0.315 | |
| 88867010200 | 0.4016 | 10.20 | 2.80 | 0.984 | 0.315 | |
| 88867010300 | 0.4055 | 10.30 | 2.80 | 0.984 | 0.315 | |
| 88867010400 | 0.4094 | 10.40 | 2.80 | 0.984 | 0.315 | |
| 88867010500 | 0.4134 | 10.50 | 2.80 | 0.984 | 0.315 | |
| 88867010600 | 0.4173 | 10.60 | 2.80 | 0.984 | 0.315 | |
| 88867010700 | 0.4213 | 10.70 | 3.15 | 1.102 | 0.394 | |
| 88867010800 | 0.4252 | 10.80 | 3.15 | 1.102 | 0.394 | |
| 88867010900 | 0.4291 | 10.90 | 3.15 | 1.102 | 0.394 | |
| 88867011000 | 0.4331 | 11.00 | 3.15 | 1.102 | 0.394 | |
| 88867011100 | 0.4370 | 11.10 | 3.15 | 1.102 | 0.394 | |
| 88867011112 | 0.4375 | 11.112 | 3.15 | 1.102 | 0.394 | 7/16" |
| 88867011200 | 0.4409 | 11.20 | 3.15 | 1.102 | 0.394 | |
| 88867011300 | 0.449 | 11.30 | 3.15 | 1.102 | 0.394 | |
| 88867011400 | 0.4488 | 11.40 | 3.15 | 1.102 | 0.394 | |
| 88867011500 | 0.4528 | 11.50 | 3.15 | 1.102 | 0.394 | |
| 88867011600 | 0.4567 | 11.60 | 3.15 | 1.102 | 0.394 | |
| 88867011700 | 0.4606 | 11.70 | 3.15 | 1.102 | 0.394 | |
| 88867011800 | 0.4646 | 11.80 | 3.15 | 1.102 | 0.394 | |
| 88867011900 | 0.4685 | 11.90 | 3.15 | 1.102 | 0.394 | 15/32" |
| 88867012000 | 0.4724 | 12.00 | 3.15 | 1.102 | 0.394 | - |
| 88867012700 | 0.5000 | 12.70 | 3.15 | 1.102 | 0.394 | 1/2" |

High Precision Carbide Micro-Reamers

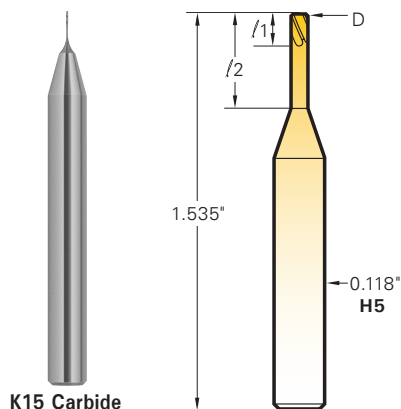

Micro-reamers are manufactured and stocked in all diameters at every 0.0002" increment. Their reinforced shank offers a greater stability necessary for these high precision tools.

| Magaforce 8610 Micro-Precision | | |
|--------------------------------|-------|-------|
| D 0.0002" increment | /1 | /2 |
| 0.0079 to 0.0096 | 0.036 | 0.079 |
| 0.0098 to 0.0116 | 0.043 | 0.098 |
| 0.0118 to 0.0136 | 0.055 | 0.118 |
| 0.0138 to 0.0156 | 0.067 | 0.138 |
| 0.0157 to 0.0195 | 0.079 | 0.157 |
| 0.0197 to 0.0234 | 0.091 | 0.197 |

For Magaforce 8610 EDP numbers, see below

| Tolerances - inch | |
|-------------------|-----------|
| H4 | ± 0.00004 |

K15 Carbide — 6.5 – 7% Cobalt (0.600 – 0.008mm grain size)

| 8610 Series | | | |
|-------------|-------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88861000200 | 0.200 | 0.0079 | 92 |
| 88861000205 | 0.205 | 0.0081 | |
| 88861000210 | 0.210 | 0.0083 | 91 |
| 88861000215 | 0.215 | 0.0085 | |
| 88861000220 | 0.220 | 0.0087 | 90 |
| 88861000225 | 0.225 | 0.0089 | |
| 88861000230 | 0.230 | 0.0091 | 89 |
| 88861000235 | 0.235 | 0.0093 | |
| 88861000240 | 0.240 | 0.0094 | 88 |
| 88861000245 | 0.245 | 0.0096 | |
| 88861000250 | 0.250 | 0.0098 | |
| 88861000255 | 0.255 | 0.0100 | 87 |
| 88861000260 | 0.260 | 0.0102 | |
| 88861000265 | 0.265 | 0.0104 | 86 |
| 88861000270 | 0.270 | 0.0106 | |
| 88861000275 | 0.275 | 0.0108 | |
| 88861000280 | 0.280 | 0.0110 | 85 |
| 88861000285 | 0.285 | 0.0112 | |
| 88861000290 | 0.290 | 0.0114 | 84 |
| 88861000295 | 0.295 | 0.0116 | |
| 88861000300 | 0.300 | 0.0118 | |
| 88861000305 | 0.305 | 0.0120 | 83 |
| 88861000310 | 0.310 | 0.0122 | |
| 88861000315 | 0.315 | 0.0124 | 82 |
| 88861000320 | 0.320 | 0.0126 | |
| 88861000325 | 0.325 | 0.0128 | |
| 88861000330 | 0.330 | 0.0130 | 81 |

| 8610 Series | | | |
|-------------|-------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88861000335 | 0.335 | 0.0132 | |
| 88861000340 | 0.340 | 0.0134 | 80 |
| 88861000345 | 0.345 | 0.0136 | |
| 88861000350 | 0.350 | 0.0138 | |
| 88861000355 | 0.355 | 0.0140 | |
| 88861000360 | 0.360 | 0.0142 | |
| 88861000365 | 0.365 | 0.0144 | 79 |
| 88861000370 | 0.370 | 0.0146 | |
| 88861000375 | 0.375 | 0.0148 | |
| 88861000380 | 0.380 | 0.0150 | |
| 88861000385 | 0.385 | 0.0152 | |
| 88861000390 | 0.390 | 0.0154 | |
| 88861000395 | 0.395 | 0.0156 | |
| 88861000400 | 0.400 | 0.0157 | |
| 88861000405 | 0.405 | 0.0159 | 78 |
| 88861000410 | 0.410 | 0.0161 | |
| 88861000415 | 0.415 | 0.0163 | |
| 88861000420 | 0.420 | 0.0165 | |
| 88861000425 | 0.425 | 0.0167 | |
| 88861000430 | 0.430 | 0.0169 | |
| 88861000435 | 0.435 | 0.0171 | |
| 88861000440 | 0.440 | 0.0173 | |
| 88861000445 | 0.445 | 0.0175 | |
| 88861000450 | 0.450 | 0.0177 | |
| 88861000455 | 0.455 | 0.0179 | 77 |
| 88861000460 | 0.460 | 0.0181 | |
| 88861000465 | 0.465 | 0.0183 | - |

4 flutes, 20° left spiral, right hand cut


| 8610 Series | | | |
|-------------|-------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88861000470 | 0.470 | 0.0185 | |
| 88861000475 | 0.475 | 0.0187 | |
| 88861000480 | 0.480 | 0.0189 | |
| 88861000485 | 0.485 | 0.0191 | |
| 88861000490 | 0.490 | 0.0193 | |
| 88861000495 | 0.495 | 0.0195 | |
| 88861000500 | 0.500 | 0.0197 | |
| 88861000505 | 0.505 | 0.0199 | 76 |
| 88861000510 | 0.510 | 0.0201 | |
| 88861000515 | 0.515 | 0.0203 | |
| 88861000520 | 0.520 | 0.0205 | |
| 88861000525 | 0.525 | 0.0207 | |
| 88861000530 | 0.530 | 0.0209 | 75 |
| 88861000535 | 0.535 | 0.0211 | |
| 88861000540 | 0.540 | 0.0213 | |
| 88861000545 | 0.545 | 0.0215 | |
| 88861000550 | 0.550 | 0.0217 | |
| 88861000555 | 0.555 | 0.0219 | |
| 88861000560 | 0.560 | 0.0220 | |
| 88861000565 | 0.565 | 0.0222 | |
| 88861000570 | 0.570 | 0.0224 | 74 |
| 88861000575 | 0.575 | 0.0226 | |
| 88861000580 | 0.580 | 0.0228 | |
| 88861000585 | 0.585 | 0.0230 | |
| 88861000590 | 0.590 | 0.0232 | |
| 88861000595 | 0.595 | 0.0234 | |

All reamers come with 10° left hand spiral/right cut flute, designed for thru holes to optimally flush out chips for improved tool life and surface finish.

High Precision 8600 Miniature Reamers

*Floating Holders available on pg. 73

| Magaforce 8600 Micro-Precision | | | | |
|--------------------------------|-------|-------|-------|-------|
| D 0.0002" increment | /1 | /2 | L | d2 H6 |
| 0.0236 to 0.0413 | 0.275 | 0.393 | 1.300 | D |
| 0.0417 to 0.0610 | 0.393 | 0.944 | 1.580 | D |
| 0.0614 to 0.0929 | 0.433 | 1.220 | 1.970 | D |
| 0.0933 to 0.1476 | 0.590 | 1.500 | 2.250 | D |
| 0.1480 to 0.1673 | 0.748 | 1.930 | 2.950 | 0.158 |
| 0.1677 to 0.1870 | 0.827 | 2" | 3.150 | 0.177 |
| 0.1874 to 0.2087 | 0.906 | 2.320 | 3.390 | 0.197 |
| 0.2091 to 0.2284 | 1.024 | 2.559 | 3.660 | 0.217 |
| 0.2288 to 0.2638 | 1.102 | 2.795 | 3.980 | 0.236 |
| 0.2642 to 0.2972 | 1.220 | 3.071 | 4.290 | 0.276 |
| 0.2976 to 0.3366 | 1.299 | 3.307 | 4.610 | 0.315 |
| 0.3370 to 0.3760 | 1.417 | 3.465 | 4.920 | 0.354 |
| 0.3763 to 0.3957 | 1.496 | 3.819 | 5.236 | 0.394 |
| 0.3961 to 0.4350 | 1.496 | 3.819 | 5.236 | 0.394 |
| 0.4354 to 0.4744 | 1.732 | 4.331 | 5.945 | 0.472 |
| 0.4748 to 0.5138 | 1.732 | 4.331 | 5.945 | 0.472 |
| 0.5535 to 0.5890 | 1.969 | 44.09 | 6.378 | 0.551 |
| 0.5929 to 0.7500 | 2.047 | 4.606 | 6.693 | 0.630 |
| 0.7468 to 0.7500 | 2.283 | 5.354 | 7.441 | 0.630 |

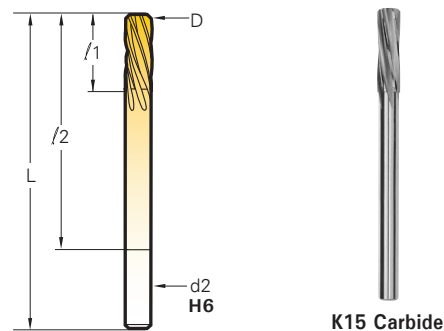

All reamers have a 45° chamfer lead
 Ø 0.0236" to 0.0929" = 4 flutes, Ø 0.0933" to .5138" = 6 flutes,
10° left spiral/right hand cut for thru holes.

For Magaforce 8600 EDP numbers see below

| Tolerances | | |
|------------|--------------|------------|
| | (mm) | (inch) |
| H7 | 0.60 – 3.00 | 0 + .00012 |
| H8 | 3.00 – 6.00 | 0 + .00016 |
| H9 | 6.00 – 19.05 | 0 + .00020 |

| 8600 Series | | | 8600 Series | | | |
|-------------|------|---------|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | EDP No. | (mm) | Decimal | Wire |
| 88860000600 | 0.60 | 0.0236 | 88860000980 | 0.98 | 0.0386 | |
| 88860000610 | 0.61 | 0.0240 | 88860000990 | 0.99 | 0.0390 | 61 |
| 88860000620 | 0.62 | 0.0244 | 88860001000 | 1.00 | 0.0394 | |
| 88860000630 | 0.63 | 0.0248 | 88860001010 | 1.01 | 0.0398 | 60 |
| 88860000640 | 0.64 | 0.0252 | 88860001020 | 1.02 | 0.0402 | |
| 88860000650 | 0.65 | 0.0256 | 88860001030 | 1.03 | 0.0406 | |
| 88860000660 | 0.66 | 0.0260 | 88860001040 | 1.04 | 0.0409 | 59 |
| 88860000670 | 0.67 | 0.0264 | 88860001050 | 1.05 | 0.0413 | |
| 88860000680 | 0.68 | 0.0268 | 88860001060 | 1.06 | 0.0417 | |
| 88860000690 | 0.69 | 0.0272 | 88860001070 | 1.07 | 0.0421 | 58 |
| 88860000700 | 0.70 | 0.0276 | 88860001080 | 1.08 | 0.0425 | |
| 88860000710 | 0.71 | 0.0280 | 88860001090 | 1.09 | 0.0429 | 57 |
| 88860000720 | 0.72 | 0.0283 | 88860001100 | 1.10 | 0.0433 | |
| 88860000730 | 0.73 | 0.0287 | 88860001110 | 1.11 | 0.0437 | |
| 88860000740 | 0.74 | 0.0291 | 88860001120 | 1.12 | 0.0441 | |
| 88860000750 | 0.75 | 0.0295 | 88860001130 | 1.13 | 0.0445 | |
| 88860000760 | 0.76 | 0.0299 | 88860001140 | 1.14 | 0.0449 | |
| 88860000770 | 0.77 | 0.0303 | 88860001150 | 1.15 | 0.0453 | |
| 88860000780 | 0.78 | 0.0307 | 88860001160 | 1.16 | 0.0457 | |
| 88860000790 | 0.79 | 0.0311 | 88860001170 | 1.17 | 0.0461 | |
| 88860000800 | 0.80 | 0.0315 | 88860001180 | 1.18 | 0.0465 | 56 |
| 88860000810 | 0.81 | 0.0319 | 88860001190 | 1.19 | 0.0469 | |
| 88860000820 | 0.82 | 0.0323 | 88860001200 | 1.20 | 0.0472 | |
| 88860000830 | 0.83 | 0.0327 | 88860001210 | 1.21 | 0.0476 | |
| 88860000840 | 0.84 | 0.0331 | 88860001220 | 1.22 | 0.0480 | |
| 88860000850 | 0.85 | 0.0335 | 88860001230 | 1.23 | 0.0484 | |
| 88860000860 | 0.86 | 0.0339 | 88860001240 | 1.24 | 0.0488 | |
| 88860000870 | 0.87 | 0.0343 | 88860001250 | 1.25 | 0.0492 | |
| 88860000880 | 0.88 | 0.0346 | 88860001260 | 1.26 | 0.0496 | |
| 88860000890 | 0.89 | 0.0350 | 88860001270 | 1.27 | 0.0500 | |
| 88860000900 | 0.90 | 0.0354 | 88860001280 | 1.28 | 0.0504 | |
| 88860000910 | 0.91 | 0.0358 | 88860001290 | 1.29 | 0.0508 | |
| 88860000920 | 0.92 | 0.0362 | 88860001300 | 1.30 | 0.0512 | |
| 88860000930 | 0.93 | 0.0366 | 88860001310 | 1.31 | 0.0516 | |
| 88860000940 | 0.94 | 0.0370 | 88860001320 | 1.32 | 0.0520 | 55 |
| 88860000950 | 0.95 | 0.0374 | 88860001330 | 1.33 | 0.0524 | |
| 88860000960 | 0.96 | 0.0378 | 88860001340 | 1.34 | 0.0528 | |
| 88860000970 | 0.97 | 0.0382 | 88860001350 | 1.35 | 0.0531 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860001360 | 1.36 | 0.0535 | |
| 88860001370 | 1.37 | 0.0539 | |
| 88860001380 | 1.38 | 0.0543 | |
| 88860001390 | 1.39 | 0.0547 | |
| 88860001400 | 1.40 | 0.0551 | 54 |
| 88860001410 | 1.41 | 0.0555 | |
| 88860001420 | 1.42 | 0.0559 | |
| 88860001430 | 1.43 | 0.0563 | |
| 88860001440 | 1.44 | 0.0567 | |
| 88860001450 | 1.45 | 0.0571 | |
| 88860001460 | 1.46 | 0.0575 | |
| 88860001470 | 1.47 | 0.0579 | |
| 88860001480 | 1.48 | 0.0583 | |
| 88860001490 | 1.49 | 0.0587 | |
| 88860001500 | 1.50 | 0.0590 | |
| 88860001510 | 1.51 | 0.0594 | 53 |
| 88860001520 | 1.52 | 0.0598 | |
| 88860001530 | 1.53 | 0.0602 | |
| 88860001540 | 1.54 | 0.0606 | |
| 88860001550 | 1.55 | 0.0610 | |
| 88860001560 | 1.56 | 0.0614 | |
| 88860001570 | 1.57 | 0.0618 | |
| 88860001580 | 1.58 | 0.0622 | |
| 88860001590 | 1.59 | 0.0626 | |
| 88860001600 | 1.60 | 0.0630 | |
| 88860001610 | 1.61 | 0.0634 | 52 |
| 88860001620 | 1.62 | 0.0638 | |
| 88860001630 | 1.63 | 0.0642 | |
| 88860001640 | 1.64 | 0.0646 | |
| 88860001650 | 1.65 | 0.0650 | |
| 88860001660 | 1.66 | 0.0654 | |
| 88860001670 | 1.67 | 0.0657 | |
| 88860001680 | 1.68 | 0.0661 | |
| 88860001690 | 1.69 | 0.0665 | |
| 88860001700 | 1.70 | 0.0669 | 51 |
| 88860001710 | 1.71 | 0.0673 | |
| 88860001720 | 1.72 | 0.0677 | |
| 88860001730 | 1.73 | 0.0681 | |

10° left spiral/right hand cut for thru holes.

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860001740 | 1.74 | 0.0685 | |
| 88860001750 | 1.75 | 0.0689 | |
| 88860001760 | 1.76 | 0.0693 | |
| 88860001770 | 1.77 | 0.0697 | |
| 88860001780 | 1.78 | 0.0701 | 50 |
| 88860001790 | 1.79 | 0.0705 | |
| 88860001800 | 1.80 | 0.0709 | |
| 88860001810 | 1.81 | 0.0713 | |
| 88860001820 | 1.82 | 0.0717 | |
| 88860001830 | 1.83 | 0.0720 | |
| 88860001840 | 1.84 | 0.0724 | |
| 88860001850 | 1.85 | 0.0728 | 49 |
| 88860001860 | 1.86 | 0.0732 | |
| 88860001870 | 1.87 | 0.0736 | |
| 88860001880 | 1.88 | 0.0740 | |
| 88860001890 | 1.89 | 0.0744 | |
| 88860001900 | 1.90 | 0.0748 | |
| 88860001910 | 1.91 | 0.0752 | |
| 88860001920 | 1.92 | 0.0756 | |
| 88860001930 | 1.93 | 0.0760 | 48 |
| 88860001940 | 1.94 | 0.0764 | |
| 88860001950 | 1.95 | 0.0768 | |
| 88860001960 | 1.96 | 0.0772 | |
| 88860001970 | 1.97 | 0.0776 | |
| 88860001980 | 1.98 | 0.0780 | |
| 88860001990 | 1.99 | 0.0783 | 47 |
| 88860002000 | 2.00 | 0.0787 | |
| 88860002010 | 2.01 | 0.0791 | |
| 88860002020 | 2.02 | 0.0795 | |
| 88860002030 | 2.03 | 0.0799 | |
| 88860002040 | 2.04 | 0.0803 | |
| 88860002050 | 2.05 | 0.0807 | |
| 88860002060 | 2.06 | 0.0811 | 46 |
| 88860002070 | 2.07 | 0.0815 | |
| 88860002080 | 2.08 | 0.0819 | 45 |
| 88860002090 | 2.09 | 0.0823 | |
| 88860002100 | 2.10 | 0.0827 | |
| 88860002110 | 2.11 | 0.0831 | |
| 88860002120 | 2.12 | 0.0835 | |
| 88860002130 | 2.13 | 0.0839 | |
| 88860002140 | 2.14 | 0.0843 | |
| 88860002150 | 2.15 | 0.0846 | |
| 88860002160 | 2.16 | 0.0850 | |
| 88860002170 | 2.17 | 0.0854 | |
| 88860002180 | 2.18 | 0.0858 | 44 |
| 88860002190 | 2.19 | 0.0862 | |
| 88860002200 | 2.20 | 0.0866 | |
| 88860002210 | 2.21 | 0.0870 | |
| 88860002220 | 2.22 | 0.0874 | |
| 88860002230 | 2.23 | 0.0878 | |
| 88860002240 | 2.24 | 0.0882 | |
| 88860002250 | 2.25 | 0.0886 | |
| 88860002260 | 2.26 | 0.0890 | 43 |
| 88860002270 | 2.27 | 0.0894 | |
| 88860002280 | 2.28 | 0.0898 | |
| 88860002290 | 2.29 | 0.0902 | |
| 88860002300 | 2.30 | 0.0906 | |
| 88860002310 | 2.31 | 0.0909 | |
| 88860002320 | 2.32 | 0.0913 | |
| 88860002330 | 2.33 | 0.0917 | |
| 88860002340 | 2.34 | 0.0921 | |
| 88860002350 | 2.35 | 0.0925 | |
| 88860002360 | 2.36 | 0.0929 | |
| 88860002370 | 2.37 | 0.0933 | 42 |
| 88860002380 | 2.38 | 0.0937 | |
| 88860002390 | 2.39 | 0.0941 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860002400 | 2.40 | 0.0945 | |
| 88860002410 | 2.41 | 0.0949 | |
| 88860002420 | 2.42 | 0.0953 | |
| 88860002430 | 2.43 | 0.0957 | |
| 88860002440 | 2.44 | 0.0961 | 41 |
| 88860002450 | 2.45 | 0.0965 | |
| 88860002460 | 2.46 | 0.0969 | |
| 88860002470 | 2.47 | 0.0972 | |
| 88860002480 | 2.48 | 0.0976 | |
| 88860002490 | 2.49 | 0.0980 | 40 |
| 88860002500 | 2.50 | 0.0984 | |
| 88860002510 | 2.51 | 0.0988 | |
| 88860002520 | 2.52 | 0.0992 | |
| 88860002530 | 2.53 | 0.0996 | 39 |
| 88860002540 | 2.54 | 0.1000 | |
| 88860002550 | 2.55 | 0.1004 | |
| 88860002560 | 2.56 | 0.1008 | |
| 88860002570 | 2.57 | 0.1012 | |
| 88860002580 | 2.58 | 0.1016 | 38 |
| 88860002590 | 2.59 | 0.1020 | |
| 88860002600 | 2.60 | 0.1024 | |
| 88860002610 | 2.61 | 0.1028 | |
| 88860002620 | 2.62 | 0.1031 | |
| 88860002630 | 2.63 | 0.1035 | |
| 88860002640 | 2.64 | 0.1039 | 37 |
| 88860002650 | 2.65 | 0.1043 | |
| 88860002660 | 2.66 | 0.1047 | |
| 88860002670 | 2.67 | 0.1051 | |
| 88860002680 | 2.68 | 0.1055 | |
| 88860002690 | 2.69 | 0.1059 | |
| 88860002700 | 2.70 | 0.1063 | 36 |
| 88860002710 | 2.71 | 0.1067 | |
| 88860002720 | 2.72 | 0.1071 | |
| 88860002730 | 2.73 | 0.1075 | |
| 88860002740 | 2.74 | 0.1079 | |
| 88860002750 | 2.75 | 0.1083 | |
| 88860002760 | 2.76 | 0.1087 | |
| 88860002770 | 2.77 | 0.1091 | |
| 88860002780 | 2.78 | 0.1094 | |
| 88860002790 | 2.79 | 0.1098 | 35 |
| 88860002800 | 2.80 | 0.1102 | |
| 88860002810 | 2.81 | 0.1106 | |
| 88860002820 | 2.82 | 0.1110 | 34 |
| 88860002830 | 2.83 | 0.1114 | |
| 88860002840 | 2.84 | 0.1118 | |
| 88860002850 | 2.85 | 0.1122 | |
| 88860002860 | 2.86 | 0.1126 | |
| 88860002870 | 2.87 | 0.1130 | 33 |
| 88860002880 | 2.88 | 0.1134 | |
| 88860002890 | 2.89 | 0.1138 | |
| 88860002900 | 2.90 | 0.1142 | |
| 88860002910 | 2.91 | 0.1146 | |
| 88860002920 | 2.92 | 0.1150 | |
| 88860002930 | 2.93 | 0.1154 | |
| 88860002940 | 2.94 | 0.1157 | |
| 88860002950 | 2.95 | 0.1161 | 32 |
| 88860002960 | 2.96 | 0.1164 | |
| 88860002970 | 2.97 | 0.1169 | |
| 88860002980 | 2.98 | 0.1173 | |
| 88860002990 | 2.99 | 0.1177 | |
| 88860003000 | 3.00 | 0.1181 | |
| 88860003010 | 3.01 | 0.1185 | |
| 88860003020 | 3.02 | 0.1189 | |
| 88860003030 | 3.03 | 0.1193 | |
| 88860003040 | 3.04 | 0.1197 | |
| 88860003050 | 3.05 | 0.1201 | 31 |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860003060 | 3.06 | 0.1205 | |
| 88860003070 | 3.07 | 0.1209 | |
| 88860003080 | 3.08 | 0.1213 | |
| 88860003090 | 3.09 | 0.1217 | |
| 88860003100 | 3.10 | 0.1220 | |
| 88860003110 | 3.11 | 0.1224 | |
| 88860003120 | 3.12 | 0.1228 | |
| 88860003130 | 3.13 | 0.1232 | |
| 88860003140 | 3.14 | 0.1236 | |
| 88860003150 | 3.15 | 0.1240 | |
| 88860003160 | 3.16 | 0.1244 | |
| 88860003170 | 3.17 | 0.1248 | |
| 88860003180 | 3.18 | 0.1252 | |
| 88860003190 | 3.19 | 0.1256 | |
| 88860003200 | 3.20 | 0.1260 | |
| 88860003210 | 3.21 | 0.1264 | |
| 88860003220 | 3.22 | 0.1268 | |
| 88860003230 | 3.23 | 0.1272 | |
| 88860003240 | 3.24 | 0.1276 | |
| 88860003250 | 3.25 | 0.1280 | |
| 88860003260 | 3.26 | 0.1283 | 30 |
| 88860003270 | 3.27 | 0.1287 | |
| 88860003280 | 3.28 | 0.1291 | |
| 88860003290 | 3.29 | 0.1295 | |
| 88860003300 | 3.30 | 0.1299 | |
| 88860003310 | 3.31 | 0.1303 | |
| 88860003320 | 3.32 | 0.1308 | |
| 88860003330 | 3.33 | 0.1311 | |
| 88860003340 | 3.34 | 0.1315 | |
| 88860003350 | 3.35 | 0.1319 | |
| 88860003360 | 3.36 | 0.1323 | |
| 88860003370 | 3.37 | 0.1327 | |
| 88860003380 | 3.38 | 0.1331 | |
| 88860003390 | 3.39 | 0.1335 | |
| 88860003400 | 3.40 | 0.1339 | |
| 88860003410 | 3.41 | 0.1343 | |
| 88860003420 | 3.42 | 0.1346 | |
| 88860003430 | 3.43 | 0.1350 | |
| 88860003440 | 3.44 | 0.1354 | |
| 88860003450 | 3.45 | 0.1358 | 29 |
| 88860003460 | 3.46 | 0.1362 | |
| 88860003470 | 3.47 | 0.1366 | |
| 88860003480 | 3.48 | 0.1370 | |
| 88860003490 | 3.49 | 0.1374 | |
| 88860003500 | 3.50 | 0.1378 | |
| 88860003510 | 3.51 | 0.1382 | |
| 88860003520 | 3.52 | 0.1386 | |
| 88860003530 | 3.53 | 0.1390 | |
| 88860003540 | 3.54 | 0.1394 | |
| 88860003550 | 3.55 | 0.1398 | |
| 88860003560 | 3.56 | 0.1402 | |
| 88860003570 | 3.57 | 0.1406 | 28 |
| 88860003580 | 3.58 | 0.1409 | |
| 88860003590 | 3.59 | 0.1413 | |
| 88860003600 | 3.60 | 0.1417 | |
| 88860003610 | 3.61 | 0.1421 | |
| 88860003620 | 3.62 | 0.1425 | |
| 88860003630 | 3.63 | 0.1429 | |
| 88860003640 | 3.64 | 0.1433 | |
| 88860003650 | 3.65 | 0.1437 | |
| 88860003660 | 3.66 | 0.1440 | 27 |
| 88860003670 | 3.67 | 0.1445 | |
| 88860003680 | 3.68 | 0.1449 | |
| 88860003690 | 3.69 | 0.1453 | |
| 88860003700 | 3.70 | 0.1457 | |

Note: Highlighted items are an increment of 0.0003

10° left spiral/right hand cut for thru holes.

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860003710 | 3.71 | 0.1461 | |
| 88860003720 | 3.72 | 0.1465 | |
| 88860003730 | 3.73 | 0.1469 | 26 |
| 88860003740 | 3.74 | 0.1472 | |
| 88860003750 | 3.75 | 0.1476 | |
| 88860003760 | 3.76 | 0.1480 | |
| 88860003770 | 3.77 | 0.1484 | |
| 88860003780 | 3.78 | 0.1488 | |
| 88860003790 | 3.79 | 0.1492 | |
| 88860003800 | 3.80 | 0.1496 | 25 |
| 88860003810 | 3.81 | 0.1500 | |
| 88860003820 | 3.82 | 0.1504 | |
| 88860003830 | 3.83 | 0.1508 | |
| 88860003840 | 3.84 | 0.1512 | |
| 88860003850 | 3.85 | 0.1516 | |
| 88860003860 | 3.86 | 0.1520 | 24 |
| 88860003870 | 3.87 | 0.1524 | |
| 88860003880 | 3.88 | 0.1528 | |
| 88860003890 | 3.89 | 0.1531 | |
| 88860003900 | 3.90 | 0.1535 | |
| 88860003910 | 3.91 | 0.1539 | 23 |
| 88860003920 | 3.92 | 0.1543 | |
| 88860003930 | 3.93 | 0.1547 | |
| 88860003940 | 3.94 | 0.1551 | |
| 88860003950 | 3.95 | 0.1555 | |
| 88860003960 | 3.96 | 0.1559 | |
| 88860003970 | 3.97 | 0.1563 | |
| 88860003980 | 3.98 | 0.1567 | |
| 88860003990 | 3.99 | 0.1571 | 22 |
| 88860004000 | 4.00 | 0.1575 | |
| 88860004010 | 4.01 | 0.1579 | |
| 88860004020 | 4.02 | 0.1583 | |
| 88860004030 | 4.03 | 0.1587 | |
| 88860004040 | 4.04 | 0.1591 | 21 |
| 88860004050 | 4.05 | 0.1594 | |
| 88860004060 | 4.06 | 0.1598 | |
| 88860004070 | 4.07 | 0.1602 | |
| 88860004080 | 4.08 | 0.1606 | |
| 88860004090 | 4.09 | 0.1610 | 20 |
| 88860004100 | 4.10 | 0.1614 | |
| 88860004110 | 4.11 | 0.1618 | |
| 88860004120 | 4.12 | 0.1622 | |
| 88860004130 | 4.13 | 0.1626 | |
| 88860004140 | 4.14 | 0.1630 | |
| 88860004150 | 4.15 | 0.1634 | |
| 88860004160 | 4.16 | 0.1638 | |
| 88860004170 | 4.17 | 0.1642 | |
| 88860004180 | 4.18 | 0.1646 | |
| 88860004190 | 4.19 | 0.1650 | |
| 88860004200 | 4.20 | 0.1654 | |
| 88860004210 | 4.21 | 0.1657 | |
| 88860004220 | 4.22 | 0.1661 | 19 |
| 88860004230 | 4.23 | 0.1665 | |
| 88860004240 | 4.24 | 0.1669 | |
| 88860004250 | 4.25 | 0.1673 | |
| 88860004260 | 4.26 | 0.1677 | |
| 88860004270 | 4.27 | 0.1681 | |
| 88860004280 | 4.28 | 0.1685 | |
| 88860004290 | 4.29 | 0.1689 | |
| 88860004300 | 4.30 | 0.1693 | 18 |
| 88860004310 | 4.31 | 0.1697 | |
| 88860004320 | 4.32 | 0.1701 | |
| 88860004330 | 4.33 | 0.1705 | |
| 88860004340 | 4.34 | 0.1709 | |
| 88860004350 | 4.35 | 0.1713 | |
| 88860004360 | 4.36 | 0.1717 | |

| 8600 Series | | | |
|-------------|-------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860004370 | 4.37 | 0.1720 | |
| 88860004380 | 4.38 | 0.1724 | |
| 88860004390 | 4.39 | 0.1728 | 17 |
| 88860004400 | 4.40 | 0.1732 | |
| 88860004410 | 4.41 | 0.1736 | |
| 88860004420 | 4.42 | 0.1740 | |
| 88860004430 | 4.43 | 0.1744 | |
| 88860004440 | 4.44 | 0.1748 | |
| 88860004450 | 4.45 | 0.1752 | |
| 88860004460 | 4.46 | 0.1756 | |
| 88860004470 | 4.47 | 0.1760 | |
| 88860004480 | 4.48 | 0.1764 | |
| 88860004490 | 4.49 | 0.1768 | 16 |
| 88860004500 | 4.50 | 0.1772 | |
| 88860004510 | 4.51 | 0.1776 | |
| 88860004520 | 4.52 | 0.1780 | |
| 88860004530 | 4.53 | 0.1783 | |
| 88860004540 | 4.54 | 0.1787 | |
| 88860004550 | 4.55 | 0.1791 | |
| 88860004560 | 4.56 | 0.1795 | |
| 88860004570 | 4.57 | 0.1799 | 15 |
| 88860004580 | 4.58 | 0.1803 | |
| 88860004590 | 4.59 | 0.1807 | |
| 88860004600 | 4.60 | 0.1811 | |
| 88860004610 | 4.61 | 0.1815 | |
| 88860004620 | 4.62 | 0.1819 | 14 |
| 88860004630 | 4.63 | 0.1823 | |
| 88860004640 | 4.64 | 0.1827 | |
| 88860004650 | 4.65 | 0.1831 | |
| 88860004660 | 4.66 | 0.1835 | |
| 88860004670 | 4.67 | 0.1839 | |
| 88860004680 | 4.68 | 0.1843 | |
| 88860004690 | 4.69 | 0.1846 | |
| 88860004700 | 4.70 | 0.1850 | 13 |
| 88860004710 | 4.71 | 0.1854 | |
| 88860004720 | 4.72 | 0.1858 | |
| 88860004730 | 4.73 | 0.1862 | |
| 88860004740 | 4.74 | 0.1866 | |
| 88860004750 | 4.75 | 0.1870 | |
| 88860004760 | 4.76 | 0.1874 | |
| 88865004762 | 4.763 | 0.1875 | |
| 88860004770 | 4.77 | 0.1878 | |
| 88860004780 | 4.78 | 0.1882 | |
| 88860004790 | 4.79 | 0.1886 | |
| 88860004800 | 4.80 | 0.1890 | 12 |
| 88860004810 | 4.81 | 0.1894 | |
| 88860004820 | 4.82 | 0.1898 | |
| 88860004830 | 4.83 | 0.1902 | |
| 88860004840 | 4.84 | 0.1906 | |
| 88860004850 | 4.85 | 0.1909 | 11 |
| 88860004860 | 4.86 | 0.1913 | |
| 88860004870 | 4.87 | 0.1917 | |
| 88860004880 | 4.88 | 0.1921 | |
| 88860004890 | 4.89 | 0.1925 | |
| 88860004900 | 4.90 | 0.1929 | |
| 88860004910 | 4.91 | 0.1933 | 10 |
| 88860004920 | 4.92 | 0.1937 | |
| 88860004930 | 4.93 | 0.1941 | |
| 88860004940 | 4.94 | 0.1945 | |
| 88860004950 | 4.95 | 0.1949 | |
| 88860004960 | 4.96 | 0.1953 | |
| 88860004970 | 4.97 | 0.1957 | |
| 88860004980 | 4.98 | 0.1961 | 9 |
| 88860004990 | 4.99 | 0.1965 | |
| 88860005000 | 5.00 | 0.1969 | |
| 88860005010 | 5.01 | 0.1972 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860005020 | 5.02 | 0.1976 | |
| 88860005030 | 5.03 | 0.1980 | |
| 88860005040 | 5.04 | 0.1984 | |
| 88860005050 | 5.05 | 0.1988 | 8 |
| 88860005060 | 5.06 | 0.1992 | |
| 88860005070 | 5.07 | 0.1996 | |
| 88860005080 | 5.08 | 0.2000 | |
| 88860005090 | 5.09 | 0.2004 | |
| 88860005100 | 5.10 | 0.2008 | 7 |
| 88860005110 | 5.11 | 0.2012 | |
| 88860005120 | 5.12 | 0.2016 | |
| 88860005130 | 5.13 | 0.2020 | |
| 88860005140 | 5.14 | 0.2024 | |
| 88860005150 | 5.15 | 0.2028 | |
| 88860005160 | 5.16 | 0.2031 | |
| 88860005170 | 5.17 | 0.2035 | |
| 88860005180 | 5.18 | 0.2039 | 6 |
| 88860005190 | 5.19 | 0.2043 | |
| 88860005200 | 5.20 | 0.2047 | |
| 88860005210 | 5.21 | 0.2051 | |
| 88860005220 | 5.22 | 0.2055 | 5 |
| 88860005230 | 5.23 | 0.2059 | |
| 88860005240 | 5.24 | 0.2063 | |
| 88860005250 | 5.25 | 0.2067 | |
| 88860005260 | 5.26 | 0.2071 | |
| 88860005270 | 5.27 | 0.2075 | |
| 88860005280 | 5.28 | 0.2079 | |
| 88860005290 | 5.29 | 0.2083 | |
| 88860005300 | 5.30 | 0.2087 | |
| 88860005310 | 5.31 | 0.2091 | 4 |
| 88860005320 | 5.32 | 0.2094 | |
| 88860005330 | 5.33 | 0.2098 | |
| 88860005340 | 5.34 | 0.2102 | |
| 88860005350 | 5.35 | 0.2106 | |
| 88860005360 | 5.36 | 0.2110 | |
| 88860005370 | 5.37 | 0.2114 | |
| 88860005380 | 5.38 | 0.2118 | |
| 88860005390 | 5.39 | 0.2122 | |
| 88860005400 | 5.40 | 0.2126 | |
| 88860005410 | 5.41 | 0.2130 | 3 |
| 88860005420 | 5.42 | 0.2134 | |
| 88860005430 | 5.43 | 0.2138 | |
| 88860005440 | 5.44 | 0.2142 | |
| 88860005450 | 5.45 | 0.2146 | |
| 88860005460 | 5.46 | 0.2150 | |
| 88860005470 | 5.47 | 0.2154 | |
| 88860005480 | 5.48 | 0.2158 | |
| 88860005490 | 5.49 | 0.2161 | |
| 88860005500 | 5.50 | 0.2165 | |
| 88860005510 | 5.51 | 0.2169 | |
| 88860005520 | 5.52 | 0.2173 | |
| 88860005530 | 5.53 | 0.2177 | |
| 88860005540 | 5.54 | 0.2181 | |
| 88860005550 | 5.55 | 0.2185 | |
| 88860005560 | 5.56 | 0.2189 | |
| 88860005570 | 5.57 | 0.2193 | |
| 88860005580 | 5.58 | 0.2197 | |
| 88860005590 | 5.59 | 0.2201 | |
| 88860005600 | 5.60 | 0.2205 | |
| 88860005610 | 5.61 | 0.2209 | 2 |
| 88860005620 | 5.62 | 0.2213 | |
| 88860005630 | 5.63 | 0.2217 | |
| 88860005640 | 5.64 | 0.2220 | |
| 88860005650 | 5.65 | 0.2224 | |
| 88860005660 | 5.66 | 0.2228 | |
| 88860005670 | 5.67 | 0.2232 | |

Note: Highlighted items are an increment of 0.0003

10° left spiral/right hand cut for thru holes.

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860005680 | 5.68 | 0.2236 | |
| 88860005690 | 5.69 | 0.2240 | |
| 88860005700 | 5.70 | 0.2244 | |
| 88860005710 | 5.71 | 0.2248 | |
| 88860005720 | 5.72 | 0.2252 | |
| 88860005730 | 5.73 | 0.2256 | |
| 88860005740 | 5.74 | 0.2260 | |
| 88860005750 | 5.75 | 0.2264 | |
| 88860005760 | 5.76 | 0.2268 | |
| 88860005770 | 5.77 | 0.2272 | |
| 88860005780 | 5.78 | 0.2276 | |
| 88860005790 | 5.79 | 0.2280 | 1 |
| 88860005800 | 5.80 | 0.2284 | |
| 88860005810 | 5.81 | 0.2288 | |
| 88860005820 | 5.82 | 0.2291 | |
| 88860005830 | 5.83 | 0.2295 | |
| 88860005840 | 5.84 | 0.2299 | |
| 88860005850 | 5.85 | 0.2303 | |
| 88860005860 | 5.86 | 0.2307 | |
| 88860005870 | 5.87 | 0.2311 | |
| 88860005880 | 5.88 | 0.2315 | |
| 88860005890 | 5.89 | 0.2319 | |
| 88860005900 | 5.90 | 0.2323 | |
| 88860005910 | 5.91 | 0.2327 | |
| 88860005920 | 5.92 | 0.2331 | |
| 88860005930 | 5.93 | 0.2335 | |
| 88860005940 | 5.94 | 0.2339 | A |
| 88860005950 | 5.95 | 0.2343 | |
| 88860005960 | 5.96 | 0.2347 | |
| 88860005970 | 5.97 | 0.2350 | |
| 88860005980 | 5.98 | 0.2354 | |
| 88860005990 | 5.99 | 0.2358 | |
| 88860006000 | 6.00 | 0.2362 | |
| 88860006010 | 6.01 | 0.2366 | |
| 88860006020 | 6.02 | 0.2370 | |
| 88860006030 | 6.03 | 0.2374 | |
| 88860006040 | 6.04 | 0.2378 | |
| 88860006050 | 6.05 | 0.2382 | B |
| 88860006060 | 6.06 | 0.2386 | |
| 88860006070 | 6.07 | 0.2390 | |
| 88860006080 | 6.08 | 0.2394 | |
| 88860006090 | 6.09 | 0.2398 | |
| 88860006100 | 6.10 | 0.2402 | |
| 88860006110 | 6.11 | 0.2406 | |
| 88860006120 | 6.12 | 0.2410 | |
| 88860006130 | 6.13 | 0.2413 | |
| 88860006140 | 6.14 | 0.2417 | |
| 88860006150 | 6.15 | 0.2421 | C |
| 88860006160 | 6.16 | 0.2425 | |
| 88860006170 | 6.17 | 0.2429 | |
| 88860006180 | 6.18 | 0.2433 | |
| 88860006190 | 6.19 | 0.2437 | |
| 88860006200 | 6.20 | 0.2441 | |
| 88860006210 | 6.21 | 0.2445 | |
| 88860006220 | 6.22 | 0.2449 | |
| 88860006230 | 6.23 | 0.2453 | |
| 88860006240 | 6.24 | 0.2457 | |
| 88860006250 | 6.25 | 0.2461 | D |
| 88860006260 | 6.26 | 0.2465 | |
| 88860006270 | 6.27 | 0.2468 | |
| 88860006280 | 6.28 | 0.2472 | |
| 88860006290 | 6.29 | 0.2476 | |
| 88860006300 | 6.30 | 0.2480 | |
| 88860006310 | 6.31 | 0.2484 | |
| 88860006320 | 6.32 | 0.2488 | |
| 88860006330 | 6.33 | 0.2492 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860006340 | 6.34 | 0.2496 | |
| 88860006350 | 6.35 | 0.2500 | E |
| 88860006360 | 6.36 | 0.2504 | |
| 88860006370 | 6.37 | 0.2508 | |
| 88860006380 | 6.38 | 0.2512 | |
| 88860006390 | 6.39 | 0.2517 | |
| 88860006400 | 6.40 | 0.2520 | |
| 88860006410 | 6.41 | 0.2524 | |
| 88860006420 | 6.42 | 0.2528 | |
| 88860006430 | 6.43 | 0.2531 | |
| 88860006440 | 6.44 | 0.2535 | |
| 88860006450 | 6.45 | 0.2539 | |
| 88860006460 | 6.46 | 0.2543 | |
| 88860006470 | 6.47 | 0.2547 | |
| 88860006480 | 6.48 | 0.2551 | |
| 88860006490 | 6.49 | 0.2555 | |
| 88860006500 | 6.50 | 0.2559 | |
| 88860006510 | 6.51 | 0.2563 | |
| 88860006520 | 6.52 | 0.2567 | |
| 88860006530 | 6.53 | 0.2571 | F |
| 88860006540 | 6.54 | 0.2575 | |
| 88860006550 | 6.55 | 0.2579 | |
| 88860006560 | 6.56 | 0.2583 | |
| 88860006570 | 6.57 | 0.2587 | |
| 88860006580 | 6.58 | 0.2591 | |
| 88860006590 | 6.59 | 0.2594 | |
| 88860006600 | 6.60 | 0.2598 | |
| 88860006610 | 6.61 | 0.2602 | |
| 88860006620 | 6.62 | 0.2606 | |
| 88860006630 | 6.63 | 0.2610 | G |
| 88860006640 | 6.64 | 0.2614 | |
| 88860006650 | 6.65 | 0.2618 | |
| 88860006660 | 6.66 | 0.2622 | |
| 88860006670 | 6.67 | 0.2626 | |
| 88860006680 | 6.68 | 0.2630 | |
| 88860006690 | 6.69 | 0.2634 | |
| 88860006700 | 6.70 | 0.2638 | |
| 88860006710 | 6.71 | 0.2642 | |
| 88860006720 | 6.72 | 0.2646 | |
| 88860006730 | 6.73 | 0.2650 | |
| 88860006740 | 6.74 | 0.2654 | |
| 88860006750 | 6.75 | 0.2657 | |
| 88860006760 | 6.76 | 0.2661 | H |
| 88860006770 | 6.77 | 0.2665 | |
| 88860006780 | 6.78 | 0.2669 | |
| 88860006790 | 6.79 | 0.2673 | |
| 88860006800 | 6.80 | 0.2677 | |
| 88860006810 | 6.81 | 0.2681 | |
| 88860006820 | 6.82 | 0.2685 | |
| 88860006830 | 6.83 | 0.2689 | |
| 88860006840 | 6.84 | 0.2693 | |
| 88860006850 | 6.85 | 0.2697 | |
| 88860006860 | 6.86 | 0.2701 | |
| 88860006870 | 6.87 | 0.2705 | |
| 88860006880 | 6.88 | 0.2709 | |
| 88860006890 | 6.89 | 0.2713 | |
| 88860006900 | 6.90 | 0.2717 | |
| 88860006910 | 6.91 | 0.2720 | I |
| 88860006920 | 6.92 | 0.2724 | |
| 88860006930 | 6.93 | 0.2728 | |
| 88860006940 | 6.94 | 0.2732 | |
| 88860006950 | 6.95 | 0.2736 | |
| 88860006960 | 6.96 | 0.2740 | |
| 88860006970 | 6.97 | 0.2744 | |
| 88860006980 | 6.98 | 0.2748 | |
| 88860006990 | 6.99 | 0.2752 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860007000 | 7.00 | 0.2756 | |
| 88860007010 | 7.01 | 0.2760 | |
| 88860007020 | 7.02 | 0.2764 | |
| 88860007030 | 7.03 | 0.2768 | J |
| 88860007040 | 7.04 | 0.2772 | |
| 88860007050 | 7.05 | 0.2776 | |
| 88860007060 | 7.06 | 0.2780 | |
| 88860007070 | 7.07 | 0.2783 | |
| 88860007080 | 7.08 | 0.2787 | |
| 88860007090 | 7.09 | 0.2791 | |
| 88860007100 | 7.10 | 0.2795 | |
| 88860007110 | 7.11 | 0.2799 | |
| 88860007120 | 7.12 | 0.2803 | |
| 88860007130 | 7.13 | 0.2807 | |
| 88860007140 | 7.14 | 0.2811 | K |
| 88860007150 | 7.15 | 0.2815 | |
| 88860007160 | 7.16 | 0.2819 | |
| 88860007170 | 7.17 | 0.8223 | |
| 88860007180 | 7.18 | 0.2827 | |
| 88860007190 | 7.19 | 0.2831 | |
| 88860007200 | 7.20 | 0.2835 | |
| 88860007210 | 7.21 | 0.2839 | |
| 88860007220 | 7.22 | 0.2843 | |
| 88860007230 | 7.23 | 0.2846 | |
| 88860007240 | 7.24 | 0.2850 | |
| 88860007250 | 7.25 | 0.2854 | |
| 88860007260 | 7.26 | 0.2858 | |
| 88860007270 | 7.27 | 0.2862 | |
| 88860007280 | 7.28 | 0.2866 | |
| 88860007290 | 7.29 | 0.2870 | |
| 88860007300 | 7.30 | 0.2874 | |
| 88860007310 | 7.31 | 0.2878 | |
| 88860007320 | 7.32 | 0.2882 | |
| 88860007330 | 7.33 | 0.2886 | |
| 88860007340 | 7.34 | 0.2890 | |
| 88860007350 | 7.35 | 0.2894 | |
| 88860007360 | 7.36 | 0.2898 | L |
| 88860007370 | 7.37 | 0.2902 | |
| 88860007380 | 7.38 | 0.2906 | |
| 88860007390 | 7.39 | 0.2909 | |
| 88860007400 | 7.40 | 0.2913 | |
| 88860007410 | 7.41 | 0.2917 | |
| 88860007420 | 7.42 | 0.2921 | |
| 88860007430 | 7.43 | 0.2925 | |
| 88860007440 | 7.44 | 0.2929 | |
| 88860007450 | 7.45 | 0.2933 | |
| 88860007460 | 7.46 | 0.2937 | |
| 88860007470 | 7.47 | 0.2941 | |
| 88860007480 | 7.48 | 0.2945 | |
| 88860007490 | 7.49 | 0.2949 | M |
| 88860007500 | 7.50 | 0.2953 | |
| 88860007510 | 7.51 | 0.2957 | |
| 88860007520 | 7.52 | 0.2961 | |
| 88860007530 | 7.53 | 0.2965 | |
| 88860007540 | 7.54 | 0.2969 | |
| 88860007550 | 7.55 | 0.2972 | |
| 88860007560 | 7.56 | 0.2976 | |
| 88860007570 | 7.57 | 0.2980 | |
| 88860007580 | 7.58 | 0.2984 | |
| 88860007590 | 7.59 | 0.2988 | |
| 88860007600 | 7.60 | 0.2992 | |
| 88860007610 | 7.61 | 0.2996 | |
| 88860007620 | 7.62 | 0.3000 | |
| 88860007630 | 7.63 | 0.3004 | |
| 88860007640 | 7.64 | 0.3008 | |
| 88860007650 | 7.65 | 0.3012 | |

Note: Highlighted items are an increment of 0.0003

10° left spiral/right hand cut for thru holes.

| 8600 Series | | | |
|--------------------|--------------|---------------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860007660 | 7.66 | 0.3016 | |
| 88860007670 | 7.67 | 0.3020 | N |
| 88860007680 | 7.68 | 0.3024 | |
| 88860007690 | 7.69 | 0.3028 | |
| 88860007700 | 7.70 | 0.3031 | |
| 88860007710 | 7.71 | 0.3035 | |
| 88860007720 | 7.72 | 0.3039 | |
| 88860007730 | 7.73 | 0.3043 | |
| 88860007740 | 7.74 | 0.3047 | |
| 88860007750 | 7.75 | 0.3051 | |
| 88860007760 | 7.76 | 0.3055 | |
| 88860007770 | 7.77 | 0.3059 | |
| 88860007780 | 7.78 | 0.3063 | |
| 88860007790 | 7.79 | 0.3067 | |
| 88860007800 | 7.80 | 0.3071 | |
| 88860007810 | 7.81 | 0.3075 | |
| 88860007820 | 7.82 | 0.3079 | |
| 88860007830 | 7.83 | 0.3083 | |
| 88860007840 | 7.84 | 0.3087 | |
| 88860007850 | 7.85 | 0.3091 | |
| 88860007860 | 7.86 | 0.3094 | |
| 88860007870 | 7.87 | 0.3098 | |
| 88860007880 | 7.88 | 0.3102 | |
| 88860007890 | 7.89 | 0.3106 | |
| 88860007900 | 7.90 | 0.3110 | |
| 88860007910 | 7.91 | 0.3114 | |
| 88860007920 | 7.92 | 0.3118 | |
| 88860007930 | 7.93 | 0.3122 | |
| 88865007937 | 7.938 | 0.3125 | |
| 88860007940 | 7.94 | 0.3126 | |
| 88860007950 | 7.95 | 0.3130 | |
| 88860007960 | 7.96 | 0.3134 | |
| 88860007970 | 7.97 | 0.3138 | |
| 88860007980 | 7.98 | 0.3142 | |
| 88860007990 | 7.99 | 0.3146 | |
| 88860008000 | 8.00 | 0.3150 | |
| 88860008010 | 8.01 | 0.3154 | |
| 88860008020 | 8.02 | 0.3157 | |
| 88860008030 | 8.03 | 0.3161 | O |
| 88860008040 | 8.04 | 0.3165 | |
| 88860008050 | 8.05 | 0.3169 | |
| 88860008060 | 8.06 | 0.3173 | |
| 88860008070 | 8.07 | 0.3177 | |
| 88860008080 | 8.08 | 0.3181 | |
| 88860008090 | 8.09 | 0.3185 | |
| 88860008100 | 8.10 | 0.3189 | |
| 88860008110 | 8.11 | 0.3193 | |
| 88860008120 | 8.12 | 0.3197 | |
| 88860008130 | 8.13 | 0.3201 | |
| 88860008140 | 8.14 | 0.3205 | |
| 88860008150 | 8.15 | 0.3209 | |
| 88860008160 | 8.16 | 0.3213 | |
| 88860008170 | 8.17 | 0.3217 | |
| 88860008180 | 8.18 | 0.3220 | |
| 88860008190 | 8.19 | 0.3224 | |
| 88860008200 | 8.20 | 0.3228 | P |
| 88860008210 | 8.21 | 0.3232 | |
| 88860008220 | 8.22 | 0.3236 | |
| 88860008230 | 8.23 | 0.3240 | |
| 88860008240 | 8.24 | 0.3244 | |
| 88860008250 | 8.25 | 0.3248 | |
| 88860008260 | 8.26 | 0.3252 | |
| 88860008270 | 8.27 | 0.3256 | |
| 88860008280 | 8.28 | 0.3260 | |
| 88860008290 | 8.29 | 0.3264 | |

| 8600 Series | | | |
|-------------|------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860008300 | 8.30 | 0.3268 | |
| 88860008310 | 8.31 | 0.3272 | |
| 88860008320 | 8.32 | 0.3276 | |
| 88860008330 | 8.33 | 0.3280 | |
| 88860008340 | 8.34 | 0.3283 | |
| 88860008350 | 8.35 | 0.3287 | |
| 88860008360 | 8.36 | 0.3291 | |
| 88860008370 | 8.37 | 0.3295 | |
| 88860008380 | 8.38 | 0.3299 | |
| 88860008390 | 8.39 | 0.3303 | |
| 88860008400 | 8.40 | 0.3307 | |
| 88860008410 | 8.41 | 0.3311 | |
| 88860008420 | 8.42 | 0.3315 | |
| 88860008430 | 8.43 | 0.3319 | Q |
| 88860008440 | 8.44 | 0.3323 | |
| 88860008450 | 8.45 | 0.3327 | |
| 88860008460 | 8.46 | 0.3331 | |
| 88860008470 | 8.47 | 0.3335 | |
| 88860008480 | 8.48 | 0.3339 | |
| 88860008490 | 8.49 | 0.3343 | |
| 88860008500 | 8.50 | 0.3346 | |
| 88860008510 | 8.51 | 0.3350 | |
| 88860008520 | 8.52 | 0.3354 | |
| 88860008530 | 8.53 | 0.3358 | |
| 88860008540 | 8.54 | 0.3362 | |
| 88860008550 | 8.55 | 0.3366 | |
| 88860008560 | 8.56 | 0.3370 | |
| 88860008570 | 8.57 | 0.3374 | |
| 88860008580 | 8.58 | 0.3378 | |
| 88860008590 | 8.59 | 0.3382 | |
| 88860008600 | 8.60 | 0.3386 | |
| 88860008610 | 8.61 | 0.3390 | R |
| 88860008620 | 8.62 | 0.3394 | |
| 88860008630 | 8.63 | 0.3398 | |
| 88860008640 | 8.64 | 0.3402 | |
| 88860008650 | 8.65 | 0.3406 | |
| 88860008660 | 8.66 | 0.3409 | |
| 88860008670 | 8.67 | 0.3413 | |
| 88860008680 | 8.68 | 0.3417 | |
| 88860008690 | 8.69 | 0.3421 | |
| 88860008700 | 8.70 | 0.3425 | |
| 88860008710 | 8.71 | 0.3429 | |
| 88860008720 | 8.72 | 0.3433 | |
| 88860008730 | 8.73 | 0.3437 | |
| 88860008740 | 8.74 | 0.3441 | |
| 88860008750 | 8.75 | 0.3445 | |
| 88860008760 | 8.76 | 0.3449 | |
| 88860008770 | 8.77 | 0.3453 | |
| 88860008780 | 8.78 | 0.3457 | |
| 88860008790 | 8.79 | 0.3461 | |
| 88860008800 | 8.80 | 0.3465 | |
| 88860008810 | 8.81 | 0.3469 | |
| 88860008820 | 8.82 | 0.3472 | |
| 88860008830 | 8.83 | 0.3476 | |
| 88860008840 | 8.84 | 0.3480 | S |
| 88860008850 | 8.85 | 0.3484 | |
| 88860008860 | 8.86 | 0.3488 | |
| 88860008870 | 8.87 | 0.3492 | |
| 88860008880 | 8.88 | 0.3496 | |
| 88860008890 | 8.89 | 0.3500 | |
| 88860008900 | 8.90 | 0.3504 | |
| 88860008910 | 8.91 | 0.3508 | |
| 88860008920 | 8.92 | 0.3512 | |
| 88860008930 | 8.93 | 0.3516 | |
| 88860008940 | 8.94 | 0.3520 | |

| 8600 Series | | | |
|-------------|-------|---------|------|
| EDP No. | (mm) | Decimal | Wire |
| 88860008950 | 8.95 | 0.3524 | |
| 88860008960 | 8.96 | 0.3528 | |
| 88860008970 | 8.97 | 0.3531 | |
| 88860008980 | 8.98 | 0.3535 | |
| 88860008990 | 8.99 | 0.3539 | |
| 88860009000 | 9.00 | 0.3543 | |
| 88860009010 | 9.01 | 0.3547 | |
| 88860009020 | 9.02 | 0.3551 | |
| 88860009030 | 9.03 | 0.3555 | |
| 88860009040 | 9.04 | 0.3559 | |
| 88860009050 | 9.05 | 0.3563 | |
| 88860009060 | 9.06 | 0.3567 | |
| 88860009070 | 9.07 | 0.3571 | |
| 88860009080 | 9.08 | 0.3575 | |
| 88860009090 | 9.09 | 0.3579 | T |
| 88860009100 | 9.10 | 0.3583 | |
| 88860009110 | 9.11 | 0.3587 | |
| 88860009120 | 9.12 | 0.3591 | |
| 88860009130 | 9.13 | 0.3594 | |
| 88860009140 | 9.14 | 0.3598 | |
| 88860009150 | 9.15 | 0.3602 | |
| 88860009170 | 9.17 | 0.3610 | |
| 88860009180 | 9.18 | 0.3614 | |
| 88860009190 | 9.19 | 0.3618 | |
| 88860009200 | 9.20 | 0.3622 | |
| 88860009210 | 9.21 | 0.3626 | |
| 88860009220 | 9.22 | 0.3630 | |
| 88860009230 | 9.23 | 0.3634 | |
| 88860009240 | 9.24 | 0.3638 | |
| 88860009250 | 9.25 | 0.3642 | |
| 88860009260 | 9.26 | 0.3646 | |
| 88860009270 | 9.27 | 0.3650 | |
| 88860009280 | 9.28 | 0.3654 | |
| 88860009290 | 9.29 | 0.3657 | |
| 88860009300 | 9.30 | 0.3661 | |
| 88860009310 | 9.31 | 0.3665 | |
| 88860009320 | 9.32 | 0.3669 | |
| 88860009330 | 9.33 | 0.3673 | |
| 88860009340 | 9.34 | 0.3677 | |
| 88860009350 | 9.35 | 0.3681 | U |
| 88860009360 | 9.36 | 0.3685 | |
| 88860009370 | 9.37 | 0.3689 | |
| 88860009380 | 9.38 | 0.3693 | |
| 88860009390 | 9.39 | 0.3697 | |
| 88860009400 | 9.40 | 0.3701 | |
| 88860009410 | 9.41 | 0.3705 | |
| 88860009420 | 9.42 | 0.3709 | |
| 88860009430 | 9.43 | 0.3713 | |
| 88860009440 | 9.44 | 0.3717 | |
| 88860009450 | 9.45 | 0.3720 | |
| 88860009460 | 9.46 | 0.3724 | |
| 88860009470 | 9.47 | 0.3728 | |
| 88860009480 | 9.48 | 0.3732 | |
| 88860009490 | 9.49 | 0.3736 | |
| 88860009500 | 9.50 | 0.3740 | |
| 88860009510 | 9.51 | 0.3744 | |
| 88860009520 | 9.52 | 0.3748 | |
| 88865009525 | 9.525 | 0.3750 | |
| 88860009530 | 9.53 | 0.3752 | |
| 88860009540 | 9.54 | 0.3756 | |
| 88860009550 | 9.55 | 0.3760 | |
| 88860009560 | 9.56 | 0.3763 | |
| 88860009570 | 9.57 | 0.3767 | |
| 88860009650 | 9.65 | - | |
| 88860009730 | 9.73 | - | |

Note: Highlighted items are an increment of 0.0003

10° left spiral/right hand cut for thru holes.

| 8600 Series | | |
|--------------|--------|---------|
| 25/64" Range | | |
| EDP No. | (mm) | Decimal |
| 88860009870 | 9.87 | 0.3886 |
| 88860009880 | 9.88 | 0.3889 |
| 88860009890 | 9.89 | 0.3893 |
| 88860009900 | 9.90 | 0.3897 |
| 88860009910 | 9.91 | 0.3901 |
| 88860009920 | 9.92 | 0.3905 |
| 88860009930 | 9.93 | 0.3909 |
| 88860009940 | 9.94 | 0.3913 |
| 88860009950 | 9.95 | 0.3917 |
| 88860009960 | 9.96 | 0.3921 |
| 10mm Range | | |
| EDP No. | (mm) | Decimal |
| 88860009970 | 9.97 | 0.3925 |
| 88860009980 | 9.98 | 0.3929 |
| 88860009990 | 9.99 | 0.3933 |
| 88860010000 | 10.00 | 0.3937 |
| 88860010010 | 10.01 | 0.3941 |
| 88860010020 | 10.02 | 0.3945 |
| 88860010030 | 10.03 | 0.3949 |
| 88860010040 | 10.04 | 0.3953 |
| 88860010050 | 10.05 | 0.3957 |
| 27/64" Range | | |
| EDP No. | (mm) | Decimal |
| 88860010660 | 10.66 | 0.4197 |
| 88860010670 | 10.67 | 0.4201 |
| 88860010680 | 10.68 | 0.4205 |
| 88860010690 | 10.69 | 0.4209 |
| 88860010700 | 10.70 | 0.4213 |
| 88860010710 | 10.71 | 0.4217 |
| 88860010720 | 10.72 | 0.4220 |
| 88860010730 | 10.73 | 0.4224 |
| 88860010740 | 10.74 | 0.4228 |
| 88860010750 | 10.75 | 0.4232 |
| 88860010760 | 10.76 | 0.4236 |
| 11mm Range | | |
| EDP No. | (mm) | Decimal |
| 88860010950 | 10.95 | 0.4311 |
| 88860010960 | 10.96 | 0.4315 |
| 88860010970 | 10.97 | 0.4319 |
| 88860010980 | 10.98 | 0.4323 |
| 88860010990 | 10.99 | 0.4327 |
| 88860011000 | 11.00 | 0.4331 |
| 88860011010 | 11.01 | 0.4335 |
| 88860011020 | 11.02 | 0.4339 |
| 88860011030 | 11.03 | 0.4343 |
| 88860011040 | 11.04 | 0.4346 |
| 88860011050 | 11.05 | 0.4350 |
| 7/16" Range | | |
| EDP No. | (mm) | Decimal |
| 88860011060 | 11.06 | 0.4354 |
| 88860011070 | 11.07 | 0.4358 |
| 88860011080 | 11.08 | 0.4362 |
| 88860011090 | 11.09 | 0.4366 |
| 88860011100 | 11.10 | 0.4370 |
| 88860011110 | 11.11 | 0.4374 |
| 88865011112 | 11.113 | 0.4375 |
| 88860011120 | 11.12 | 0.4378 |
| 88860011130 | 11.13 | 0.4382 |
| 88860011140 | 11.14 | 0.4386 |
| 88860011150 | 11.15 | 0.4390 |
| 88860011160 | 11.16 | 0.4394 |
| 88860011170 | 11.17 | - |

| 8600 Series | | |
|-----------------------|-------|---------|
| 29/64" & 11.5mm Range | | |
| EDP No. | (mm) | Decimal |
| 88860011450 | 11.45 | 0.4508 |
| 88860011460 | 11.46 | 0.4512 |
| 88860011470 | 11.47 | 0.4516 |
| 88860011480 | 11.48 | 0.4520 |
| 88860011490 | 11.49 | 0.4524 |
| 88860011500 | 11.50 | 0.4528 |
| 88860011510 | 11.51 | 0.4531 |
| 88860011520 | 11.52 | 0.4535 |
| 88860011530 | 11.53 | 0.4539 |
| 88860011540 | 11.54 | 0.4543 |
| 88860011550 | 11.55 | 0.4547 |
| 5/32" Range | | |
| EDP No. | (mm) | Decimal |
| 88860011850 | 11.85 | 0.4665 |
| 88860011860 | 11.86 | 0.4669 |
| 88860011870 | 11.87 | 0.4673 |
| 88860011880 | 11.88 | 0.4677 |
| 88860011890 | 11.89 | 0.4681 |
| 88860011900 | 11.90 | 0.4685 |
| 88860011910 | 11.91 | 0.4689 |
| 88860011920 | 11.92 | 0.4693 |
| 88860011930 | 11.93 | 0.4697 |
| 12mm Range | | |
| EDP No. | (mm) | Decimal |
| 88860011940 | 11.94 | 0.4701 |
| 88860011950 | 11.95 | 0.4705 |
| 88860011960 | 11.96 | 0.4709 |
| 88860011970 | 11.97 | 0.4713 |
| 88860011980 | 11.98 | 0.4717 |
| 88860011990 | 11.99 | 0.4720 |
| 88860012000 | 12.00 | 0.4724 |
| 88860012010 | 12.01 | 0.4728 |
| 88860012020 | 12.02 | 0.4732 |
| 88860012030 | 12.03 | 0.4736 |
| 88860012040 | 12.04 | 0.4740 |
| 88860012050 | 12.05 | 0.4744 |
| 31/64" Range | | |
| EDP No. | (mm) | Decimal |
| 88860012250 | 12.25 | 0.4823 |
| 88860012260 | 12.26 | 0.4827 |
| 88860012270 | 12.27 | 0.4831 |
| 88860012280 | 12.28 | 0.4835 |
| 88860012290 | 12.29 | 0.4839 |
| 88860012300 | 12.30 | 0.4843 |
| 88860012310 | 12.31 | 0.4846 |
| 88860012320 | 12.32 | 0.4850 |
| 88860012330 | 12.33 | 0.4854 |
| 88860012340 | 12.34 | 0.4858 |
| 88860012350 | 12.35 | 0.4862 |

| 8600 Series | | |
|-------------|--------|---------|
| 1/2" Range | | |
| EDP No. | (mm) | Decimal |
| 88860012650 | 12.65 | 0.4980 |
| 88860012660 | 12.66 | 0.4984 |
| 88860012670 | 12.67 | 0.4988 |
| 88860012680 | 12.68 | 0.4992 |
| 88860012690 | 12.69 | 0.4996 |
| 88860012700 | 12.70 | 0.5000 |
| 88860012710 | 12.71 | 0.5004 |
| 88860012720 | 12.72 | 0.5008 |
| 88860012730 | 12.73 | 0.5012 |
| 88860012740 | 12.74 | 0.5016 |
| 88860012750 | 12.75 | 0.5020 |
| 88860012940 | 12.94 | 0.5094 |
| 88860012950 | 12.95 | 0.5098 |
| 88860012960 | 12.96 | 0.5102 |
| 88860012970 | 12.97 | 0.5106 |
| 88860012980 | 12.98 | 0.5110 |
| 88860012990 | 12.99 | 0.5114 |
| 13mm Range | | |
| EDP No. | (mm) | Decimal |
| 88860013000 | 13.00 | 0.5118 |
| 88860013010 | 13.01 | 0.5122 |
| 88860013020 | 13.02 | 0.5126 |
| 88860013030 | 13.03 | 0.5130 |
| 88860013040 | 13.04 | 0.5134 |
| 88860013050 | 13.05 | 0.5138 |
| 88865014287 | 14.287 | 0.5625 |
| 88865015875 | 15.875 | 0.6250 |
| 88865019050 | 19.050 | 0.7500 |

Note: Highlighted items are an increment of 0.0003

Reamer Formulas for Speeds & Feeds

The parameters below are based on using a carbide reamer at the highest SFM

SFM: Surface Feet per Minute

RPM: Revolutions per Minute

IPT: Inches per Tooth (chip load)

IPM: Inches per Minute

IPR: Inches per Revolution

Speed Formula:

RPM = $3.82 \times (\text{SFM} \div \text{Diameter})$

Feed:

IPM = $\text{IPT} \times \# \text{ of Flutes} \times \text{RPM}$

IPR = $\text{IPM} \div \text{RPM}$

SFM = $\text{RPM} \times \text{Diameter} \div 3.82$

Example:

using a Carbide 2mm Reamer
in Steel < 81 HRB

RPM = $3.82 \times (132 \div .0787) = 6407 \text{ RPM}$

IPM = $.0015 \times 4 \times 6407 = 38.4 \text{ IPM}$

IPR = $38.4 \div 6407 = .0059 \text{ IPR}$

This chart lists general reference parameters for a starting point. Below are a couple of tips for fine-tuning the desired size.

To increase the hole diameter: Slow down the feed rate and/or decrease RPM

To decrease the hole diameter: Increase the feed rate and/or increase the RPM

| General reference parameters for a starting point | | | | | | | | | |
|---|-------------|----------|-----|-------------|--------|--------|--------|--------|--------|
| Material | Speed / SFM | | | Diameter mm | | | | | |
| | Carbide | Cobalt | | 2 | 4 | 6 | 10 | 15 | 20 |
| Steel < 81 HRB | 82 – 132 | 49 – 72 | IPR | 0.006 | 0.006 | 0.006 | 0.0098 | 0.0098 | 0.0118 |
| | | | IPM | 38.4 | 19.2 | 12.8 | 12.3 | 8.2 | 7.7 |
| | | | RPM | 6400 | 3200 | 2130 | 1300 | 850 | 640 |
| Steel < 24 Rc. | 66 – 82 | 39 – 56 | IPR | 0.0039 | 0.0039 | 0.0047 | 0.0071 | 0.0071 | 0.0098 |
| | | | IPM | 14.3 | 8.4 | 6.4 | 5.7 | 3.8 | 3.8 |
| | | | RPM | 4000 | 2000 | 1300 | 800 | 500 | 400 |
| Steel 24-32 Rc. | 39 – 59 | 25 – 33 | IPR | 0.0031 | 0.0031 | 0.0039 | 0.0071 | 0.0059 | 0.0087 |
| | | | IPM | 8.6 | 4.3 | 3.4 | 4.1 | 2.3 | 2.4 |
| | | | RPM | 2800 | 1430 | 1000 | 600 | 400 | 280 |
| Steel 32-41 Rc. | 33 – 49 | 16 – 23 | IPR | 0.0031 | 0.0031 | 0.0035 | 0.0059 | 0.0079 | 0.0098 |
| | | | IPM | 7.1 | 3.6 | 2.9 | 2.9 | 2.5 | 2.3 |
| | | | RPM | 2400 | 1200 | 800 | 500 | 300 | 240 |
| Stainless Steel | 23 – 39 | 10 – 16 | IPR | 0.0028 | 0.0028 | 0.0039 | 0.0047 | 0.0059 | 0.0079 |
| | | | IPM | 5.7 | 2.8 | 2.3 | 1.8 | 1.5 | 1.5 |
| | | | RPM | 1900 | 950 | 630 | 400 | 250 | 240 |
| Inconel/Waspaloy | 20 – 33 | 7 – 10 | IPR | 0.0028 | 0.0028 | 0.0039 | 0.0047 | 0.0059 | 0.0079 |
| | | | IPM | 4.8 | 2.4 | 1.9 | 1.5 | 1.3 | 1.2 |
| | | | RPM | 1600 | 800 | 540 | 320 | 200 | 200 |
| Cast Iron ≤ 180 HB (Grey) | 99 – 132 | 20 – 49 | IPR | 0.0039 | 0.0039 | 0.0047 | 0.0079 | 0.0098 | 0.0098 |
| | | | IPM | 231.1 | 11.5 | 10.2 | 10 | 8.2 | 6.1 |
| | | | RPM | 6400 | 3200 | 2130 | 1300 | 850 | 640 |
| Cast Iron > 180 HB | 26 – 49 | 13 – 16 | IPR | 0.0028 | 0.0028 | 0.0039 | 0.0059 | 0.0071 | 0.0079 |
| | | | IPM | 7.1 | 3.6 | 2.9 | 2.9 | 2.3 | 1.9 |
| | | | RPM | 2400 | 1200 | 800 | 480 | 300 | 240 |
| Copper | 82 – 99 | 39 – 66 | IPR | 0.0047 | 0.0047 | 0.0071 | 0.0079 | 0.0098 | 0.0118 |
| | | | IPM | 23.1 | 11.5 | 11.5 | 7.5 | 6.1 | 5.8 |
| | | | RPM | 4800 | 2400 | 1600 | 960 | 640 | 480 |
| Brass | 115 – 132 | 66 – 99 | IPR | 0.0079 | 0.0079 | 0.0087 | 0.0118 | 0.0138 | 0.0157 |
| | | | IPM | 50 | 25 | 17.9 | 15.4 | 11.8 | 10 |
| | | | RPM | 6400 | 3200 | 2130 | 1300 | 850 | 640 |
| Bronze | 66 – 82 | 39 – 56 | IPR | 0.0059 | 0.0059 | 0.0071 | 0.0087 | 0.138 | 0.0146 |
| | | | IPM | 21.5 | 11.9 | 9.5 | 7.2 | 7.3 | 5.7 |
| | | | RPM | 4000 | 2000 | 1320 | 800 | 530 | 400 |
| Aluminum | 132 – 197 | 82 – 115 | IPR | 0.0059 | 0.0059 | 0.0071 | 0.0098 | 0.0118 | 0.0138 |
| | | | IPM | 57.3 | 28.7 | 22.9 | 18.3 | 15.3 | 13.2 |
| | | | RPM | 9500 | 4800 | 3200 | 1900 | 1300 | 950 |
| Recommended drill hole diameter: | | | | 1.90 | 3.90 | 5.85 | 9.80 | 14.70 | 19.70 |

Note: Reference pg. 118 for Drill Hole Diameter Chart

Reamer Hole Size Chart

Correct Hole Sizes for Best Reamer Results


All Magafor Micro and Miniature Solid Carbide Reamers are left-hand spiral/right-hand cut with a 45° Lead. Designed for thru holes or holes with enough room to accommodate a small amount of waste material.

The left-hand spiral acts like an Archimedean Screw. Coolant is directly led to the cutting edges for better lubrication and cooling. Chips are pushed forward with no scratches and leave outstanding surface finishes.


Over 1,125 Standard Sizes
Starting at .0079 in .0002" increments to 0.0236"
In 0.0004" increments to 0.5020"

| Final Hole Size to Drilled Hole Size | | |
|--------------------------------------|---------------------------------------|-------------------------------------|
| Final Hole Reamer Size (mm/inch) | Reduce Drill Hole Size (inch) min/max | Reduce Drill Hole Size (mm) min/max |
| 0.20 / 0.00787 | -0.00157 / -0.00236 | -0.04 / -0.06 |
| 0.30 / 0.01181 | -0.00197 / -0.00315 | -0.05 / -0.08 |
| 0.40 / 0.01575 | -0.00197 / -0.00394 | -0.05 / -0.10 |
| 0.50 / 0.01969 | -0.00197 / -0.0047 | -0.05 / -0.12 |
| 0.60 / 0.02362 | -0.0019 / -0.00472 | -0.05 / -0.12 |
| 2.00 / 0.07874 | -0.00197 / -0.00472 | -0.05 / -0.12 |
| 6.00 / 0.23622 | -0.00591 / -0.00787 | -0.15 / -0.20 |
| 10.00 / 0.39370 | -0.0059 / -0.00787 | -0.15 / -0.20 |
| 15.00 / 0.59055 | -0.01181 / -0.01575 | -0.30 / -0.40 |
| 20.00 / 0.78740 | -0.01181 / -0.01575 | -0.30 / -0.40 |
| 25.00 / 0.98425 | -0.01181 / -0.01969 | -0.30 / -0.50 |
| 15.00 / 0.59055 | -0.01181 / -0.01575 | -0.30 / -0.40 |
| 20.00 / 0.78740 | -0.01181 / -0.01575 | -0.30 / -0.40 |
| 25.00 / 0.98425 | -0.01181 / -0.01969 | -0.30 / -0.50 |

220° Ball-End Miniature End-Mills with Back Clearance

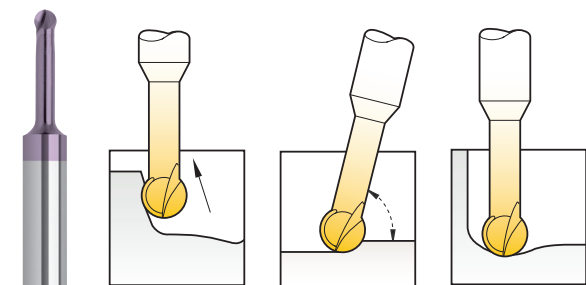

| Metric Long Neck Series / 2 | | | | | | | | |
|-----------------------------|------|------|----|----|------|------|------|---------------|
| Diameter | | d1 | d2 | L | /1 | /2 | R | Hard'X 8522-H |
| (inch) | (mm) | | | | | | | |
| 0.0315 | 0.8 | 0.70 | 3 | 60 | 0.55 | 4.0 | 0.4 | 888522H0080 |
| 0.0394 | 1.0 | 0.85 | 3 | 60 | 0.70 | 5.0 | 0.5 | 888522H0100 |
| 0.0472 | 1.2 | 1.00 | 3 | 60 | 0.80 | 6.0 | 0.6 | 888522H0120 |
| 0.0590 | 1.5 | 1.30 | 3 | 60 | 1.00 | 7.5 | 0.75 | 888522H0150 |
| 0.0787 | 2.0 | 1.70 | 3 | 60 | 1.35 | 10.0 | 1.0 | 888522H0200 |
| 0.1180 | 3.0 | 2.60 | 6 | 75 | 2.00 | 15.0 | 1.5 | 888522H0300 |
| 0.1575 | 4.0 | 3.45 | 6 | 75 | 2.70 | 20.0 | 2.0 | 888522H0400 |
| 0.1969 | 5.0 | 4.30 | 6 | 75 | 3.40 | 25.0 | 2.5 | 888522H0500 |

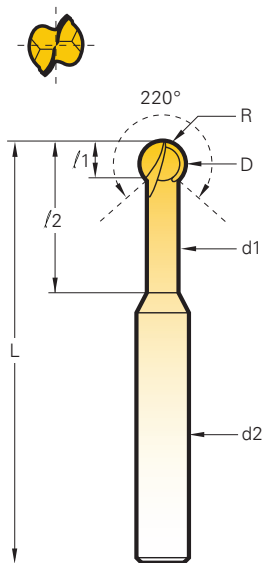


K15 Carbide


High Performance Micro-Milling




Applications: **Machining hard materials, abrasives composites, titanium and Hi-temp Alloys.**

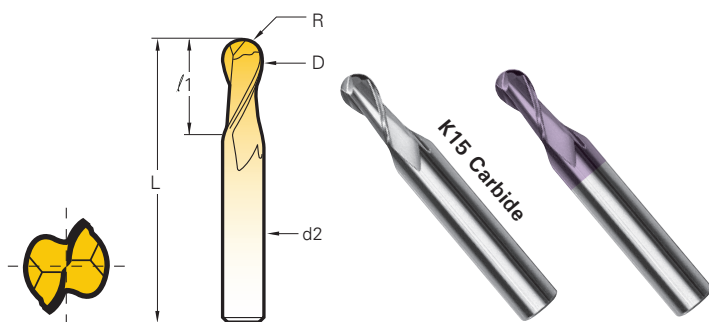


| Ball End Series | | L = 39mm | | d2 = 0.188 / 3mm | | f = 1.5 x D | |
|-----------------|---------------|----------|--------|------------------|---------------|-------------|--|
| Diameter (inch) | Diameter (mm) | f / 1 | r | magafor 8527 | Hard'X 8527-H | | |
| 0.0039 | 0.10 | 0.0039 | 0.0020 | 88852700100 | - | | |
| 0.0059 | 0.15 | 0.0079 | 0.0030 | 88852700150 | - | | |
| 0.0079 | 0.20 | 0.0118 | 0.0039 | 88852700200 | - | | |
| 0.0098 | 0.25 | 0.0138 | 0.0049 | 88852700250 | - | | |
| 0.0118 | 0.30 | 0.0177 | 0.0059 | 88852700300 | 888527H0030 | | |
| 0.0157 | 0.40 | 0.0236 | 0.0079 | 88852700400 | 888527H0040 | | |
| 0.0197 | 0.50 | 0.0295 | 0.0098 | 88852700500 | 888527H0050 | | |
| 0.0236 | 0.60 | 0.0354 | 0.0118 | 88852700600 | 888527H0060 | | |
| 0.0276 | 0.70 | 0.0413 | 0.0138 | 88852700700 | 888527H0070 | | |
| 0.0315 | 0.80 | 0.0472 | 0.0157 | 88852700800 | 888527H0080 | | |
| 0.0354 | 0.90 | 0.0531 | 0.0177 | 88852700900 | 888527H0090 | | |
| 0.0394 | 1.00 | 0.0591 | 0.0197 | 88852701000 | 888527H0100 | | |
| 0.0472 | 1.20 | 0.0709 | 0.0236 | 88852701200 | 888527H0120 | | |
| 0.0591 | 1.50 | 0.0886 | 0.0295 | 88852701500 | 888527H0150 | | |
| 0.0787 | 2.00 | 0.1181 | 0.0394 | 88852702000 | 888527H0200 | | |

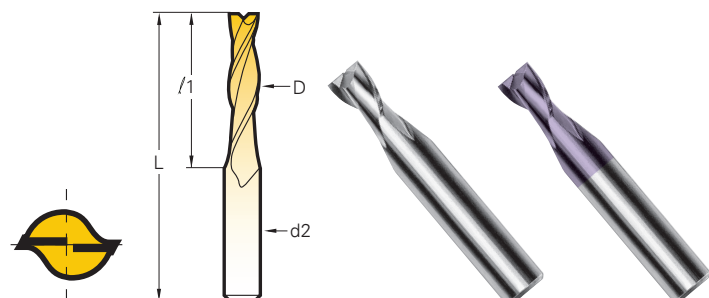


| Square End Series | | L = 39mm | | d2 = 3mm | | f = 1.5 x D | |
|-------------------|---------------|----------|--|--------------|---------------|-------------|--|
| Diameter (inch) | Diameter (mm) | f / 1 | | magafor 8507 | Hard'X 8507-H | | |
| 0.0039 | 0.10 | 0.0039 | | 88850700100 | - | | |
| 0.0059 | 0.15 | 0.0079 | | 88850700150 | - | | |
| 0.0079 | 0.20 | 0.0118 | | 88850700200 | - | | |
| 0.0098 | 0.25 | 0.0138 | | 88850700250 | - | | |
| 0.0118 | 0.30 | 0.0177 | | 88850700300 | 888507H0030 | | |
| 0.0157 | 0.40 | 0.0236 | | 88850700400 | 888507H0040 | | |
| 0.0197 | 0.50 | 0.0295 | | 88850700500 | 888507H0050 | | |
| 0.0236 | 0.60 | 0.0354 | | 88850700600 | 888507H0060 | | |
| 0.0276 | 0.70 | 0.0413 | | 88850700700 | 888507H0070 | | |
| 0.0315 | 0.80 | 0.0472 | | 88850700800 | 888507H0080 | | |
| 0.0354 | 0.90 | 0.0531 | | 88850700900 | 888507H0090 | | |
| 0.0394 | 1.00 | 0.0591 | | 88850701000 | 888507H0100 | | |
| 0.0433 | 1.10 | 0.0650 | | 88850701100 | 888507H0110 | | |
| 0.0472 | 1.20 | 0.0709 | | 88850701200 | 888507H0120 | | |
| 0.0512 | 1.30 | 0.0768 | | 88850701300 | 888507H0130 | | |
| 0.0551 | 1.40 | 0.0827 | | 88850701400 | 888507H0140 | | |
| 0.0591 | 1.50 | 0.0886 | | 88850701500 | 888507H0150 | | |
| 0.0630 | 1.60 | 0.0945 | | 88850701600 | 888507H0160 | | |
| 0.0669 | 1.70 | 0.1004 | | 88850701700 | 888507H0170 | | |
| 0.0709 | 1.80 | 0.1063 | | 88850701800 | 888507H0180 | | |
| 0.0748 | 1.90 | 0.1122 | | 88850701900 | 888507H0190 | | |
| 0.0787 | 2.00 | 0.1181 | | 88850702000 | 888507H0200 | | |




Copying



Precise Grooving
0 - 0.01mm



Precise Grooving
R +/- 0.01mm



Flat Bottom Boring

Engaged right from the start in the process aspiring to excellence, in addition to our Futura and TiN coatings, Magafor offers three "X" coatings, sprung from multi-layer nano technology.


Hard'X [For hard milling] carbide tool coating has a high hardness (3500 HV) and shows a high thermic stability. It offers excellent protection against heat and wear and is ideal for dry machining-high speed cut-in treated steels and dies up to 67 Rc.

Graph'X [For composite milling] diamond coating (8000 HV) is particularly effective when machining graphite, composite materials, plastics with glass-fibers or carbon-fibers.


Standard Length Miniature End-mills

| Standard Length Miniature End-Mills 2-3 x D | | | | | | | |
|--|------|-------|-------------|--------------|-------------------|-------------------|------------------|
| Diameter | | f1 | L | d2 | magaforce 8500 | Graph'X 8500-G | Hard'X 8500-H |
| (inch) | (mm) | | | | | | |
| 0.0020 | 0.05 | 0.004 | 1-1/2 | 0.118 3mm | 88850000050 | | |
| 0.0024 | 0.06 | 0.005 | | | 88850000060 | | |
| 0.0031 | 0.08 | 0.006 | | | 88850000080 | | |
| 0.0039 | 0.10 | 0.008 | | | 88850000100 | | |
| 0.0047 | 0.12 | 0.009 | | | 88850000120 | | |
| 0.0059 | 0.15 | 0.012 | | | 88850000150 | | |
| 0.0079 | 0.20 | 0.020 | | | 88850000200 | | |
| 0.0098 | 0.25 | 0.020 | | | 88850000250 | | |
| 0.0118 | 0.30 | 0.039 | | | 88850000300 | 888500G0030 | 888500H0030 |
| 0.0138 | 0.35 | 0.039 | | | 88850000350 | 888500G0035 | 888500H0035 |
| 0.0157 | 0.40 | 0.039 | | | 88850000400 | 888500G0040 | 888500H0040 |
| 0.0177 | 0.45 | 0.039 | | | 88850000450 | 888500G0045 | 888500H0045 |
| 0.0197 | 0.50 | 0.059 | | | 88850000500 | 888500G0050 | 888500H0050 |
| 0.0216 | 0.55 | 0.059 | | | 88850000550 | 888500G0055 | 888500H0055 |
| 0.0236 | 0.60 | 0.059 | | | 88850000600 | 888500G0060 | 888500H0060 |
| 0.0256 | 0.65 | 0.059 | | | 88850000650 | 888500G0065 | 888500H0065 |
| 0.0276 | 0.70 | 0.079 | | | 88850000700 | 888500G0070 | 888500H0070 |
| 0.0295 | 0.75 | 0.079 | | | 88850000750 | 888500G0075 | 888500H0075 |
| 0.0315 | 0.80 | 0.079 | | | 88850000800 | 888500G0080 | 888500H0080 |
| 0.0335 | 0.85 | 0.079 | | | 88850000850 | 888500G0085 | 888500H0085 |
| 0.0354 | 0.90 | 0.098 | | | 88850000900 | 888500G0090 | 888500H0090 |
| 0.0374 | 0.95 | 0.098 | | | 88850000950 | 888500G0095 | 888500H0095 |
| 0.0394 | 1.00 | 0.12 | | | 88850001000 | 888500G0100 | 888500H0100 |
| 0.0413 | 1.05 | 0.12 | | | 88850001050 | 888500G0105 | 888500H0105 |
| 0.0433 | 1.10 | 0.12 | | | 88850001100 | 888500G0110 | 888500H0110 |
| 0.0452 | 1.15 | 0.12 | | | 88850001150 | 888500G0115 | 888500H0115 |
| 0.0472 | 1.20 | 0.16 | | | 88850001200 | 888500G0120 | 888500H0120 |
| 0.0492 | 1.25 | 0.16 | | | 88850001250 | 888500G0125 | 888500H0125 |
| 0.0512 | 1.30 | 0.16 | | | 88850001300 | 888500G0130 | 888500H0130 |
| 0.0551 | 1.40 | 0.16 | | | 88850001400 | 888500G0140 | 888500H0140 |
| 0.0591 | 1.50 | 0.16 | | | 88850001500 | 888500G0150 | 888500H0150 |
| 0.0630 | 1.60 | 0.20 | | | 88850001600 | 888500G0160 | 888500H0160 |
| 0.0669 | 1.70 | 0.20 | 88850001700 | 888500G0170 | 888500H0170 | | |
| 0.0709 | 1.80 | 0.20 | 88850001800 | 888500G0180 | 888500H0180 | | |
| 0.0748 | 1.90 | 0.20 | 88850001900 | 888500G0190 | 888500H0190 | | |
| 0.0787 | 2.00 | 0.20 | 88850002000 | 888500G0200 | 888500H0200 | | |
| 0.0827 | 2.10 | 0.24 | 88850002100 | 888500G0210 | 888500H0210 | | |
| 0.0866 | 2.20 | 0.24 | 88850002200 | 888500G0220 | 888500H0220 | | |
| 0.0906 | 2.30 | 0.24 | 88850002300 | 888500G0230 | 888500H0230 | | |
| 0.0945 | 2.40 | 0.24 | 88850002400 | 888500G0240 | 888500H0240 | | |
| 0.0984 | 2.50 | 0.28 | 88850002500 | 888500G0250 | 888500H0250 | | |
| 0.1024 | 2.60 | 0.28 | 88850002600 | 888500G0260 | 888500H0260 | | |
| 0.1063 | 2.70 | 0.28 | 88850002700 | 888500G0270 | 888500H0270 | | |
| 0.1102 | 2.80 | 0.28 | 88850002800 | 888500G0280 | 888500H0280 | | |
| 0.1142 | 2.90 | 0.28 | 88850002900 | 888500G0290 | 888500H0290 | | |
| 0.1181 | 3.00 | 0.39 | 88850003000 | 888500G0300 | 888500H0300 | | |
| 0.1220 | 3.10 | 0.39 | 88850003100 | 888500G0310 | 888500H0310 | | |


continued next page



**Slotting
Engraving**



**Flat Bottom
Boring**

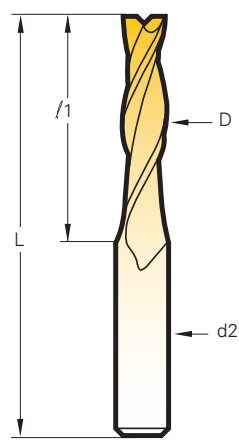

**K15 Carbide — 6.5 – 7% Cobalt
(0.006 – 0.008mm grain size)**

| Tolerances - inch | |
|-------------------|--|
| 0 – 0.0004 | |

Standard Length Miniature End-Mills




Continued from page 101

| Standard Length Miniature End-Mills 2-3 x D | | | | | | | | | |
|--|------|------|-------------|--------------|-------------------|-------------------|------------------|-------------|-------------|
| Diameter | | /1 | L | d2 | magaforce 8500 | Graph'X 8500-G | Hard'X 8500-H | | |
| (inch) | (mm) | | | | | | | | |
| 0.1260 | 3.20 | 0.39 | 1-3/4 | 0.157 4mm | 88850003200 | 888500G0320 | 888500H0320 | | |
| 0.1299 | 3.30 | 0.39 | | | 88850003300 | 888500G0330 | 888500H0330 | | |
| 0.1339 | 3.40 | 0.39 | | | 88850003400 | 888500G0340 | 888500H0340 | | |
| 0.1378 | 3.50 | 0.39 | | | 88850003500 | 888500G0350 | 888500H0350 | | |
| 0.1417 | 3.60 | 0.39 | | | 88850003600 | 888500G0360 | 888500H0360 | | |
| 0.1457 | 3.70 | 0.39 | | | 88850003700 | 888500G0370 | 888500H0370 | | |
| 0.1496 | 3.80 | 0.39 | | | 88850003800 | 888500G0380 | 888500H0380 | | |
| 0.1535 | 3.90 | 0.39 | | | 88850003900 | 888500G0390 | 888500H0390 | | |
| 0.1575 | 4.00 | 0.47 | | | 88850004000 | 888500G0400 | 888500H0400 | | |
| 0.1614 | 4.10 | 0.47 | | | 88850004100 | 888500G0410 | 888500H0410 | | |
| 0.1654 | 4.20 | 0.47 | 88850004200 | 888500G0420 | 888500H0420 | | | | |
| 0.1693 | 4.30 | 0.47 | 1-1/2 | 0.118 3mm | 88850004300 | 888500G0430 | 888500H0430 | | |
| 0.1732 | 4.40 | 0.47 | | | 88850004400 | 888500G0440 | 888500H0440 | | |
| 1.7720 | 4.50 | 0.47 | | | 88850004500 | 888500G0450 | 888500H0450 | | |
| 0.1811 | 4.60 | 0.47 | | | 88850004600 | 888500G0460 | 888500H0460 | | |
| 0.1850 | 4.70 | 0.47 | | | 88850004700 | 888500G0470 | 888500H0470 | | |
| 0.1890 | 4.80 | 0.47 | | | 88850004800 | 888500G0480 | 888500H0480 | | |
| 0.1929 | 4.90 | 0.47 | | | 88850004900 | 888500G0490 | 888500H0490 | | |
| 0.1969 | 5.00 | 0.55 | | | 2-3/16 | 0.236 6mm | 88850005000 | 888500G0500 | 888500H0500 |
| 0.2008 | 5.10 | 0.55 | | | | | 88850005100 | 888500G0510 | 888500H0510 |
| 0.2047 | 5.20 | 0.55 | | | | | 88850005200 | 888500G0520 | 888500H0520 |
| 0.2087 | 5.30 | 0.55 | 88850005300 | 888500G0530 | | | 888500H0530 | | |
| 0.2126 | 5.40 | 0.55 | 88850005400 | 888500G0540 | | | 888500H0540 | | |
| 0.2165 | 5.50 | 0.55 | 88850005500 | 888500G0550 | | | 888500H0550 | | |
| 0.2205 | 5.60 | 0.55 | 88850005600 | 888500G0560 | | | 888500H0560 | | |
| 0.2244 | 5.70 | 0.55 | 88850005700 | 888500G0570 | | | 888500H0570 | | |
| 0.2283 | 5.80 | 0.55 | 88850005800 | 888500G0580 | | | 888500H0580 | | |
| 0.2323 | 5.90 | 0.55 | 88850005900 | 888500G0590 | | | 888500H0590 | | |




K15 Carbide

Long Miniature End-mills


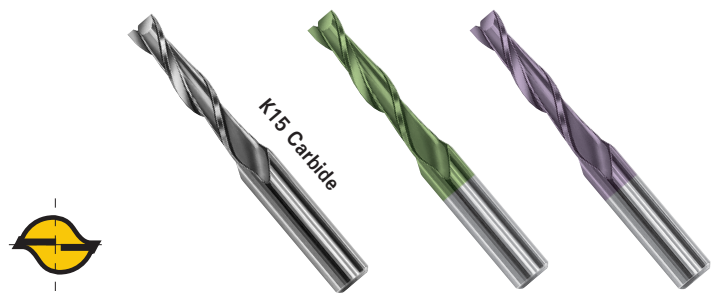


Long Series
K15 Carbide d2 = 0.118 L = 39mm / = 5 x D

| Diameter | | /1 | magaforce 8509 | Graph'X 8509-G | Hard'X 8509-H |
|----------|------|-------|-------------------|-------------------|------------------|
| (inch) | (mm) | | | | |
| 0.0157 | 0.4 | 0.078 | 88850900400 | 888509G0040 | 888509H0040 |
| 0.0197 | 0.5 | 0.098 | 88850900500 | 888509G0050 | 888509H0050 |
| 0.0236 | 0.6 | 0.118 | 88850900600 | 888509G0060 | 888509H0060 |
| 0.0276 | 0.7 | 0.137 | 88850900700 | 888509G0070 | 888509H0070 |
| 0.0315 | 0.8 | 0.157 | 88850900800 | 888509G0080 | 888509H0080 |
| 0.0354 | 0.9 | 0.177 | 88850900900 | 888509G0090 | 888509H0090 |
| 0.0394 | 1.0 | 0.197 | 88850901000 | 888509G0100 | 888509H0100 |
| 0.0472 | 1.2 | 0.236 | 88850901200 | 888509G0120 | 888509H0120 |
| 0.0591 | 1.5 | 0.295 | 88850901500 | 888509G0150 | 888509H0150 |
| 0.0787 | 2.0 | 0.394 | 88850902000 | 888509G0200 | 888509H0200 |

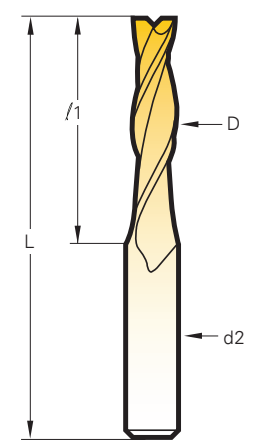


Tolerances - inch
0 - 0.0004

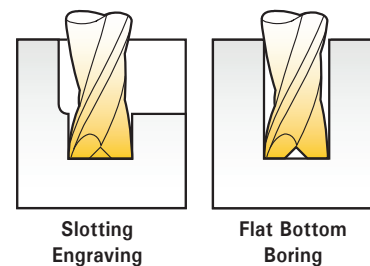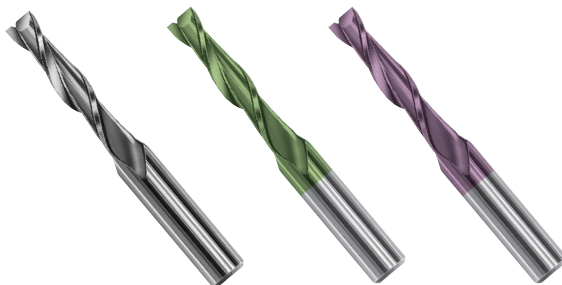

Tolerances - inch
0 - 0.0004

| Diameter | | | /1 | L | d2 | / = 8 x D | | |
|----------|------|----------------|-------|---------------|-------------|----------------|---------------|--|
| (inch) | (mm) | magaforce 8510 | | | | Graph'X 8510-G | Hard'X 8510-H | |
| 0.0197 | 0.5 | 0.157 | 1-1/2 | 0.118 3 mm | 88851000500 | 888510G0050 | 888510H0050 | |
| 0.0236 | 0.6 | 0.197 | | | 88851000600 | 888510G0060 | 888510H0060 | |
| 0.0315 | 0.8 | 0.236 | | | 88851000800 | 888510G0080 | 888510H0080 | |
| 0.0394 | 1.0 | 0.315 | | | 88851001000 | 888510G0100 | 888510H0100 | |
| 0.0472 | 1.2 | 0.354 | | | 88851001200 | 888510G0120 | 888510H0120 | |
| 0.0591 | 1.5 | 0.472 | 1-3/4 | 0.157 4 mm | 88851001500 | 888510G0150 | 888510H0150 | |
| 0.0787 | 2.0 | 0.630 | | | 88851002000 | 888510G0200 | 888510H0200 | |
| 0.0984 | 2.5 | 0.788 | 2-3/8 | 0.197 5 mm | 88851002500 | 888510G0250 | 888510H0250 | |
| 0.1181 | 3.0 | 0.945 | | | 88851003000 | 888510G0300 | 888510H0300 | |

Miniature End-mills with Back Clearance



Hard to Reach Machining



| Diameter x /2 | | | /1 | L | d2 = 0.188 / 3mm / | | |
|----------------|----------|------------------|-------|--------------|---------------------|--------------------|--|
| (inch) | (mm) | magaforce 8507-D | | | K15/Graph'X 8507-DG | K15/Hard'X 8507-DH | |
| 0.0157 x 0.078 | 0.4 x 2 | 0.024 | 1-1/2 | 888507D0042 | 888507DG0042 | 888507DH0042 | |
| 0.0197 x 0.078 | 0.5 x 2 | 0.027 | 1-1/2 | 888507D0052 | 888507DG0052 | 888507DH0052 | |
| 0.0197 x 0.157 | 0.5 x 4 | 0.027 | 1-1/2 | 888507D0054 | 888507DG0054 | 888507DH0054 | |
| 0.0197 x 0.236 | 0.5 x 6 | 0.027 | 2-3/8 | 888507D0056 | 888507DG0056 | 888507DH0056 | |
| 0.0236 x 0.157 | 0.6 x 4 | 0.029 | 1-1/2 | 888507D0064 | 888507DG0064 | 888507DH0064 | |
| 0.0276 x 0.157 | 0.7 x 4 | 0.035 | 1-1/2 | 888507D0074 | 888507DG0074 | 888507DH0074 | |
| 0.0315 x 0.157 | 0.8 x 4 | 0.041 | 1-1/2 | 888507D0084 | 888507DG0084 | 888507DH0084 | |
| 0.0315 x 0.236 | 0.8 x 6 | 0.041 | 1-1/2 | 888507D0086 | 888507DG0086 | 888507DH0086 | |
| 0.0315 x 0.354 | 0.8 x 9 | 0.041 | 2-3/8 | 888507D0089 | 888507DG0089 | 888507DH0089 | |
| 0.0354 x 0.236 | 0.9 x 6 | 0.053 | 1-1/2 | 888507D0096 | 888507DG0096 | 888507DH0096 | |
| 0.0394 x 0.157 | 1.0 x 4 | 0.059 | 1-1/2 | 888507D0140 | 888507DG0140 | 888507DH0140 | |
| 0.0394 x 0.236 | 1.0 x 6 | 0.059 | 1-1/2 | 888507D0160 | 888507DG0160 | 888507DH0160 | |
| 0.0394 x 0.354 | 1.0 x 9 | 0.059 | 1-1/2 | 888507D0190 | 888507DG0190 | 888507DH0190 | |
| 0.0394 x 0.472 | 1.0 x 12 | 0.059 | 2-3/8 | 888507D0112 | 888507DG0112 | 888507DH0112 | |
| 0.0472 x 0.236 | 1.2 x 6 | 0.071 | 1-1/2 | 888507D0126 | 888507DG0126 | 888507DH0126 | |
| 0.0472 x 0.354 | 1.2 x 9 | 0.071 | 1-1/2 | 888507D0129 | 888507DG0129 | 888507DH0129 | |
| 0.0551 x 0.236 | 1.4 x 6 | 0.083 | 1-1/2 | 888507D0146 | 888507DG0146 | 888507DH0146 | |
| 0.0551 x 0.354 | 1.4 x 9 | 0.083 | 1-1/2 | 888507D0149 | 888507DG0149 | 888507DH0149 | |
| 0.0591 x 0.236 | 1.5 x 6 | 0.089 | 1-1/2 | 888507D0156 | 888507DG0156 | 888507DH0156 | |
| 0.0591 x 0.354 | 1.5 x 9 | 0.089 | 1-1/2 | 888507D0159 | 888507DG0159 | 888507DH0159 | |
| 0.0591 x 0.472 | 1.5 x 12 | 0.089 | 2-3/8 | 888507D01512 | 888507DG01512 | 888507DH01512 | |
| 0.0709 x 0.354 | 1.8 x 9 | 0.106 | 1-1/2 | 888507D0189 | 888507DG0189 | 888507DH0189 | |
| 0.0709 x 0.472 | 1.8 x 12 | 0.106 | 1-1/2 | 888507D01812 | 888507DG01812 | 888507DH01812 | |
| 0.0787 x 0.354 | 2.0 x 9 | 0.118 | 1-1/2 | 888507D0290 | 888507DG0290 | 888507DH0290 | |
| 0.0787 x 0.472 | 2.0 x 12 | 0.118 | 1-1/2 | 888507D0212 | 888507DG0212 | 888507DH0212 | |
| 0.0787 x 0.590 | 2.0 x 15 | 0.118 | 2-3/8 | 888507D0215 | 888507DG0215 | 888507DH0215 | |
| 0.0984 x 0.590 | 2.5 x 15 | 0.148 | 2-3/8 | 888507D02515 | 888507DG02515 | 888507DH02515 | |



Performance Recommendations

- Endmills with long neck, extra-long neck, and deep machining: Reduce the speed, while maintaining the suggested feed.
- Superficial work: Increase the speed, while maintaining the suggested feed.

This chart lists general reference parameters for a starting point.

SFM: Surface Feet per Minute

RPM: Revolutions per Minute

IPT: Inches per Tooth (chip load)

IPM: Inches per Minute

IPR: Inches per Revolution

Speed Formula:

$$\text{RPM} = 3.82 \times (\text{SFM} \div \text{Diameter})$$

Feed:

$$\text{IPM} = \text{IPT} \times \# \text{ of Flutes} \times \text{RPM}$$

$$\text{IPR} = \text{IPM} \div \text{RPM}$$

$$\text{SFM} = \text{RPM} \times \text{Diameter} \div 3.82$$

Hard'X

Graph'X

| Material | Diameter (inch - mm) | Hard'X | | | | Graph'X | | | |
|---|-------------------------|-----------|-----------------|----------------|-----------|-----------|-------------------|----------------|-----------|
| | | Speed SFM | RPM | IPT 2 Flute | IPM | Speed SFM | RPM | IPT 2 flute | IPM |
| Chromium / Cobalt | 0.0197 - 0.5 | 82 | 15,900 – 28,504 | 0.0004 | 13 – 23 | 164 | 31,000 – 38,200 | 0.0004 | 25 – 30 |
| | 0.0394 - 1.0 | ~ | 7,950 – 14,252 | 0.0006 | 9.5 – 17 | ~ | 15,900 – 19,100 | 0.0006 | 19 – 23 |
| | 0.0787 - 2.0 | 147 | 3,980 – 7,135 | 0.0012 | 9.5 – 17 | 197 | 7,960 – 9,562 | 0.0012 | 19 – 23 |
| | 0.1575 - 4.0 | | 1,989 – 3,565 | 0.0023 | 9 – 16 | | 3,978 – 4,778 | 0.0023 | 18 – 22 |
| Graphite, Plastic w/glass or carbon fibers | 0.0197 - 0.5 | 197 | 38,200 – 57,203 | 0.0004 | 30 – 46 | 656 | 127,204 – 159,005 | 0.0004 | 102 - 127 |
| | 0.0394 - 1.0 | ~ | 19,100 – 28,602 | 0.0006 | 23 – 34 | ~ | 63,602 – 79,502 | 0.0006 | 76 – 95 |
| | 0.0787 - 2.0 | 295 | 9,562 – 14,189 | 0.0012 | 23 – 34 | 820 | 31,841 – 39,802 | 0.0012 | 76 – 95 |
| | 0.1575 - 4.0 | | 4,778 – 7,155 | 0.0023 | 22 – 33 | | 15,911 – 19,888 | 0.0023 | 73 - 91 |
| Steel 24 ~ 44 HrC | 0.0394 - 1.0 | ~ | 12,700 – 15,900 | 0.0003 | 7.5 - 9.5 | | | | |
| | 0.0787 - 2.0 | 164 | 6,359 – 7,960 | 0.0007 | 9-11 | | | | |
| | 0.1575 - 4.0 | | 3,177 – 3,978 | 0.0014 | 9-11 | | | | |
| Treated Steel 45 ~ 55 HrC | 0.0197 - 0.5 | 98 | 19,003 – 22,300 | 0.0001 | 3.8 - 4.5 | | | | |
| | 0.0394 - 1.0 | ~ | 9,502 – 11,150 | 0.0002 | 3.8 - 4.5 | | | | |
| | 0.0787 - 2.0 | 115 | 4,757 – 5,582 | 0.0004 | 3.8 - 4.5 | | | | |
| | 0.1575 - 4.0 | | 2,377 – 2,789 | 0.0008 | 3.8 - 4.5 | | | | |
| Treated Steel > 55 HrC | 0.0197 - 0.5 | 49 | 9,502 – 11,798 | 0.00006 | 1.1 - 1.4 | | | | |
| | 0.0394 - 1.0 | ~ | 4,750 – 6,399 | 0.00015 | 1.4 - 1.9 | | | | |
| | 0.0787 - 2.0 | 66 | 2,378 – 3,204 | 0.00024 | 1.1 - 1.5 | | | | |
| | 0.1575 - 4.0 | | 1,188 – 1,600 | 0.00055 | 1.3 - 1.8 | | | | |
| Stainless Steel | 0.0197 - 0.5 | 131 | 25,400 – 31,000 | 0.0002 | 10 – 12 | | | | |
| | 0.0394 - 1.0 | ~ | 12,700 – 15,900 | 0.0004 | 10 – 13 | | | | |
| | 0.0787 - 2.0 | 164 | 6,359 – 7,960 | 0.0008 | 10 – 13 | | | | |
| | 0.1575 - 4.0 | | 3,177 – 3,978 | 0.0019 | 12 – 15 | | | | |
| Super alloys Inconel / Waspaloy | 0.0197 - 0.5 | 59 | 11,440 – 15,900 | 0.00004 | 1 – 1.3 | | | | |
| | 0.0394 - 1.0 | ~ | 5,720 – 7,950 | 0.00012 | 1.4 - 1.9 | | | | |
| | 0.0787 - 2.0 | 82 | 2,864 – 3,980 | 0.00016 | 1 – 1.3 | | | | |
| | 0.1575 - 4.0 | | 1,431 – 1,989 | 0.00032 | 1 – 1.3 | | | | |
| Titanium / Ti-alloy | 0.0197 - 0.5 | 65 | 12,604 – 19,003 | 0.00008 | 2 – 3 | | | | |
| | 0.0394 - 1.0 | ~ | 6,302 – 9,502 | 0.00024 | 3 – 4.5 | | | | |
| | 0.0787 - 2.0 | 98 | 3,155 – 4,757 | 0.00032 | 2 – 3 | | | | |
| | 0.1575 - 4.0 | | 1,577 – 2,377 | 0.00059 | 1.9 - 2.8 | | | | |
| Ceramics | 0.0197 - 0.5 | 229 | 44,405 – 57,203 | 0.0004 | 35 – 46 | | | | |
| | 0.0394 - 1.0 | ~ | 22,203 – 28,602 | 0.0008 | 35 – 46 | | | | |
| | 0.0787 - 2.0 | 295 | 11,115 – 14,189 | 0.0016 | 35 – 45 | | | | |
| | 0.1575 - 4.0 | | 5,554 – 7,155 | 0.0031 | 34 - 44 | | | | |
| Aluminum other plastics | 0.0197 - 0.5 | 328 | 63,602 – 95,403 | 0.0004 | 51 – 76 | | | | |
| | 0.0394 - 1.0 | ~ | 31,801 – 47,702 | 0.0006 | 38 – 57 | | | | |
| | 0.0787 - 2.0 | 492 | 15,920 – 23,881 | 0.0012 | 38 – 57 | | | | |
| | 0.1575 - 4.0 | | 7,955 – 11,933 | 0.0023 | 36 - 55 | | | | |
| Copper / Brass / Bronze | 0.0197 - 0.5 | 164 | 31,000 – 50,804 | 0.0004 | 25 – 41 | | | | |
| | 0.0394 - 1.0 | ~ | 15,900 – 25,402 | 0.0006 | 19 – 30 | | | | |
| | 0.0787 - 2.0 | 262 | 7,960 – 12,717 | 0.0012 | 19 – 30 | | | | |
| | 0.1575 - 4.0 | | 3,978 – 6,355 | 0.0023 | 18 - 29 | | | | |



GMauvaisUSA™

High-Precision Micro Drills

PILLOT

Table of Contents

| | |
|---|----------------|
| Introduction | 125 |
| 5140 Series HSS-E Cobalt 8% 2-3 x D, Center Cut – Pilot – Spot Drills 120°..... | 126 |
| 5100 Series HSS-E Cobalt 8% 5 x D – Depth of Cut 120°..... | 127-130 |
| 6140 Series Solid Carbide 2-3 x D, Center Cut – Pilot – Spot Drills 120°..... | 131 |
| 6130 Series Solid Carbide 4-5 x D – Depth of Cut 120°..... | 132-133 |
| 6120 Series Solid Carbide 4-5 x D – Depth of Cut 120°..... | 134-137 |
| 6100 Series Solid Carbide 5-7 x D – Depth of Cut 120°..... | 138-140 |
| 1100 Series Solid Carbide Half Round Gun Drills 10 x D – Depth of Cut 120°..... | 141 |
| 6200 HP Series Solid Carbide High Performance! 6-7 x D – Depth of Cut 140°..... | 142 |
| 6220 HP Series Solid Carbide High Performance! 12 x D – Depth of Cut 140°..... | 143 |
| 6230 CT Series Coolant-Thru 15 x D – Depth of Cut 140°..... | 144 |
| 62FLX Series Solid Carbide 30-40 x D – Depth of Cut 135°..... | 145 |
| 3100 Series Short Solid Carbide 3 Flute SHORT Cross Drills 140°..... | 146 |
| 3200 Series Long Solid Carbide 3 Flute LONG Reamer Drills 140°..... | 147 |
| 62H1 Gun Drill - Single Flute Helicoidal Drills | 148 |
| Speeds and Feeds Chart | 149 |

PRODOT



The Anatomy of a Superior Micro Drill

- Superior edge quality and flute surface finishes for high performance
- Extraordinary concentricity, circularity and straightness within 2 microns
- Consistent, accurate dimensions every time
- Amazing dimension control at h6, h4 and h3 μm tolerances
- Ultra-fine surface finish for smooth operation
- Superior HSS heat treating and 10% cobalt micro grain carbide for outstanding performance and long tool life



μm

What is a Micron?

1 micron = .001mm = .00003937"

One Hundreth (1/100) of a human hair

Superior Micro Drills...

Since 1928, GMauvaisUSA™ been delivering high precision micro drills in μm Micron tolerances to the Swiss Watch Industry. With innovative and unique manufacturing technologies in turning, bar cutting, grinding, milling, flute grinding, sharpening and heat-treating, the company produces products of the most consistent quality and reliable specifications, meeting their strict standards for superior quality. Their ability to control our high production operations with incredibly tight tolerances, makes us the right choice. Pilot Precision Products offers a complete range of products in solid carbide and cobalt high speed steel.

| Operation | Series | |
|----------------|----------------------|--|
| Centering | 5140 6140 61CD | |
| | | |
| Pivot/Spot | 5140 6140 61CD | |
| | | |
| Drilling | 5100 6120 6130 | |
| | 6100 6200 3200 | |
| | 6220 6230 CT | |
| | | |
| Cross-Drilling | 3100 3200 | |



approximately 10x actual size



**Superior Precision,
Quality, Consistency and
Performance**

5140 Series HSS-E Cobalt 8%

2-3 x D, Center Cut – Pilot – Spot Drills 120°




+ 0.000/- 0.006mm (h6)

For use prior to using 5100 series drills. Can also be used as a drill with 2-3 x D Depth.
All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 24°, 30° or other
- Point angles of 90°, 110°, 130°, 140° or other
- Special diameters of 1.255mm or other
- Special tolerances as +/- 0.001mm or other
- Coatings available upon request
- Minimum custom order is 10 pieces
- **Lead-time on custom orders—4 weeks ARO**

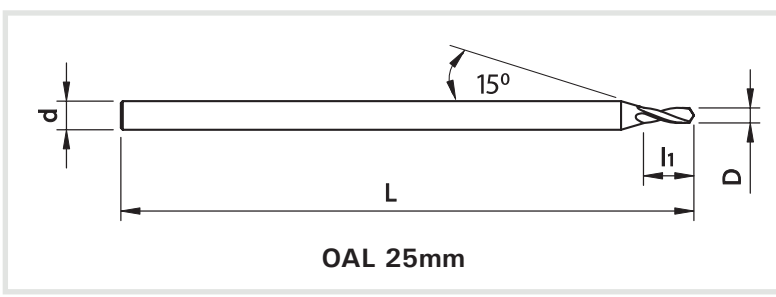

5140 Series HSS-E Cobalt 8% - Drill Sizes 0.20 – 3.00mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|
| 0.20 | 0.0079 | 92 | 1.5 | 0.6 | 25.0 | 5140020R |
| 0.25 | 0.0098 | | | 0.8 | | 5140025R |
| 0.30 | 0.0118 | | | 0.9 | | 5140030R |
| 0.35 | 0.0138 | | | 1.0 | | 5140035R |
| 0.40 | 0.0157 | | | 1.2 | | 5140040R |
| 0.45 | 0.0177 | | | 1.4 | | 5140045R |
| 0.50 | 0.0197 | | | 1.7 | | 5140050R |
| 0.55 | 0.0217 | | | 2.0 | | 5140055R |
| 0.60 | 0.0236 | | | 2.3 | | 5140060R |
| 0.65 | 0.0256 | | | 2.7 | | 5140065R |
| 0.70 | 0.0276 | | | 3.0 | | 5140070R |
| 0.75 | 0.0295 | | | | | 5140075R |
| 0.80 | 0.0315 | | | | | 5140080R |
| 0.85 | 0.0335 | | | | | 5140085R |
| 0.90 | 0.0354 | | | | | 5140090R |
| 0.95 | 0.0374 | | | | | 5140095R |
| 1.00 | 0.0394 | | | | | 5140100R |
| 1.05 | 0.0413 | | | | | 5140105R |
| 1.10 | 0.0433 | | | | | 5140110R |
| 1.15 | 0.0453 | | | | | 5140115R |
| 1.20 | 0.0472 | | | 5140120R | | |
| 1.25 | 0.0492 | | | 5140125R | | |
| 1.30 | 0.0512 | | | 5140130R | | |
| 1.35 | 0.0531 | | | 5140135R | | |
| 1.40 | 0.0551 | 54 | | 5140140R | | |
| 1.45 | 0.0571 | | | 5140145R | | |
| 1.50 | 0.0591 | | | 5140150R | | |
| 1.60 | 0.0630 | 51 | 2.0 | 3.0 | 5140160R | |

5140 Series HSS-E Cobalt 8% - Drill Sizes 0.20 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|
| 1.70 | 0.0669 | | 2.0 | 3.3 | 25.0 | 5140170R |
| 1.80 | 0.0709 | | | 4.0 | | 5140180R |
| 1.90 | 0.0748 | | | 4.0 | | 5140190R |
| 2.00 | 0.0787 | | | 4.6 | | 5140200R |
| 2.10 | 0.0827 | | 2.5 | 4.6 | | 5140210R |
| 2.20 | 0.0866 | | | 5.3 | | 5140220R |
| 2.30 | 0.0906 | | | 5.3 | | 5140230R |
| 2.40 | 0.0945 | | | 5.3 | | 5140240R |
| 2.50 | 0.0984 | | 3.0 | 5.3 | | 5140250R |
| 2.60 | 0.1024 | | | 5.3 | | 5140260R |
| 2.70 | 0.1063 | | | 5.3 | 5140270R | |
| 2.80 | 0.1102 | | | 5.3 | 5140280R | |
| 2.90 | 0.1142 | | 5.3 | 5140290R | | |
| 3.00 | 0.1181 | | 5.3 | 5140300R | | |

Pilot Drills

- For use prior to using 5100 series drills
- Can be used as pilot drill with 2-3 x D Depth

5100 Series HSS-E Cobalt 8%

5 x D – Depth of Cut 120°



8%
COBALT
HSS-E

RH

120°
Point

24°
Helix

2
FLUTES

RHC
65

h6


+ 0.000/- 0.006mm (h6)

For materials with long forming chips, steel up to 35 rhc, copper, stainless, titanium.

All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 30°, 35° or other
- Point angles of 90°, 110°, 130°, 140° or other
- Special diameters of 1.255mm or other
- Special tolerances as +/- 0.001mm or other
- Coatings available upon request
- Minimum custom order is 10 Pieces
- **Lead-time on custom orders—4 weeks ARO**

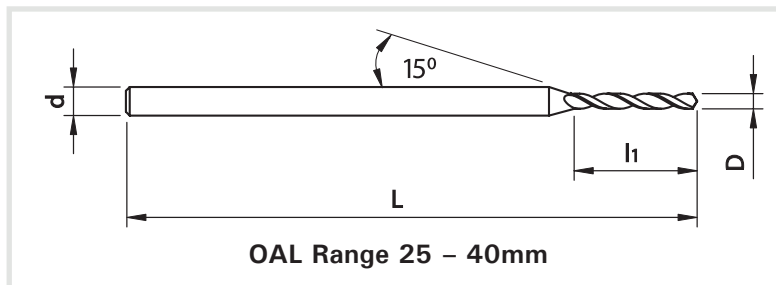

5100 Series HSS-E Cobalt 8% - Drill Sizes 0.10 – 0.65mm

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|-------------------------|----------------------------|---------------------------------|-------------------------|
| 0.10 | 0.0039 | | 1.0 | 0.7 | 25 | 5100010R |
| 0.11 | 0.0043 | | | | | 5100011R |
| 0.12 | 0.0047 | | | | | 5100012R |
| 0.13 | 0.0051 | | | 5100013R | | |
| 0.14 | 0.0055 | | | 5100014R | | |
| 0.15 | 0.0059 | 97 | | 5100015R | | |
| 0.16 | 0.0063 | 96 | | 5100016R | | |
| 0.17 | 0.0067 | 95 | | 5100017R | | |
| 0.18 | 0.0071 | 94 | | 5100018R | | |
| 0.19 | 0.0075 | 93 | | 5100019R | | |
| 0.20 | 0.0079 | 92 | | 5100020R | | |
| 0.21 | 0.0083 | 91 | | 5100021R | | |
| 0.22 | 0.0087 | 90 | | 5100022R | | |
| 0.23 | 0.0091 | 89 | | 5100023R | | |
| 0.24 | 0.0094 | 88 | | 5100024R | | |
| 0.25 | 0.0098 | | | 5100025R | | |
| 0.26 | 0.0102 | | | 5100026R | | |
| 0.27 | 0.0106 | 86 | | 5100027R | | |
| 0.28 | 0.0110 | 85 | | 5100028R | | |
| 0.29 | 0.0114 | 84 | | 5100029R | | |
| 0.30 | 0.0118 | | | 5100030R | | |
| 0.31 | 0.0122 | | | 5100031R | | |
| 0.32 | 0.0126 | 82 | | 5100032R | | |
| 0.33 | 0.0130 | 81 | | 5100033R | | |
| 0.34 | 0.0134 | 80 | | 5100034R | | |
| 0.35 | 0.0138 | | | 5100035R | | |
| 0.36 | 0.0142 | | | 5100036R | | |
| 0.37 | 0.0146 | 79 | | 5100037R | | |

5100 Series HSS-E Cobalt 8% - Drill Sizes 0.10 – 0.65mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|-------------------------|----------------------------|---------------------------------|-------------------------|
| 0.38 | 0.0150 | | 1 | 2.8 | 25 | 5100038R |
| 0.39 | 0.0154 | | | 5100039R | | |
| 0.40 | 0.0157 | | | 5100040R | | |
| 0.41 | 0.0161 | 78 | | 5100041R | | |
| 0.42 | 0.0165 | | | 5100042R | | |
| 0.43 | 0.0169 | | | 5100043R | | |
| 0.44 | 0.0173 | | | 5100044R | | |
| 0.45 | 0.0177 | | | 5100045R | | |
| 0.46 | 0.0181 | 77 | | 5100046R | | |
| 0.47 | 0.0185 | | | 5100047R | | |
| 0.48 | 0.0189 | | 5100048R | | | |
| 0.49 | 0.0193 | | 5100049R | | | |
| 0.50 | 0.0197 | | 1.5 | 4.0 | 5100050R | |
| 0.51 | 0.0201 | 76 | | | 5100051R | |
| 0.52 | 0.0205 | | | | 5100052R | |
| 0.53 | 0.0209 | 75 | | | 5100053R | |
| 0.54 | 0.0213 | | | | 5100054R | |
| 0.55 | 0.0217 | | | | 5100055R | |
| 0.56 | 0.0220 | | | | 5100056R | |
| 0.57 | 0.0224 | 74 | | | 5100057R | |
| 0.58 | 0.0228 | | | | 5100058R | |
| 0.59 | 0.0232 | | | | 5100059R | |
| 0.60 | 0.0236 | | 5100060R | | | |
| 0.61 | 0.0240 | 73 | 5100061R | | | |
| 0.62 | 0.0244 | | 5100062R | | | |
| 0.63 | 0.0248 | 72 | 5100063R | | | |
| 0.64 | 0.0252 | | 5100064R | | | |
| 0.65 | 0.0256 | | 5100065R | | | |

Series 5100 Continued

5100 Series HSS-E Cobalt 8%

5 x D – Depth of Cut 120°, continued



5100 Series HSS-E Cobalt 8% - Drill Sizes 0.66 – 1.59mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | | | | | | | |
|-------------------------|--|----------------|-------------------------|----------------------------|---------------------------------|-------------------------|----------|----------|----------|----------|----------|----------|----------|
| 0.66 | 0.0260 | 71 | 1.5 | 4.7 | 25.0 | 5100066R | | | | | | | |
| 0.67 | 0.0264 | | | | | 5100067R | | | | | | | |
| 0.68 | 0.0268 | | | | | 5100068R | | | | | | | |
| 0.69 | 0.0272 | | | | | 5100069R | | | | | | | |
| 0.70 | 0.0276 | | | 5100070R | | | | | | | | | |
| 0.71 | 0.0280 | 70 | | 5.2 | | 25.0 | 5100071R | | | | | | |
| 0.72 | 0.0283 | | | | | | 5100072R | | | | | | |
| 0.73 | 0.0287 | | | | | | 5100073R | | | | | | |
| 0.74 | 0.0291 | 69 | | | | | 5100074R | | | | | | |
| 0.75 | 0.0295 | | | 5100075R | | | | | | | | | |
| 0.76 | 0.0299 | | | 5100076R | | | | | | | | | |
| 0.77 | 0.0303 | | | 5100077R | | | | | | | | | |
| 0.78 | 0.0307 | | | 5100078R | | | | | | | | | |
| 0.79 | 0.0311 | 68-1/32 | | 5.5 | | | 25.0 | 5100079R | | | | | |
| 0.80 | 0.0315 | | | | | | | 5100080R | | | | | |
| 0.81 | 0.0319 | 67 | | | | | | 5100081R | | | | | |
| 0.82 | 0.0323 | | | | | | | 5100082R | | | | | |
| 0.83 | 0.0327 | | | 5100083R | | | | | | | | | |
| 0.84 | 0.0331 | 66 | | 6.0 | | | | 25.0 | 5100084R | | | | |
| 0.85 | 0.0335 | | | | | | | | 5100085R | | | | |
| 0.86 | 0.0339 | | | | | | | | 5100086R | | | | |
| 0.87 | 0.0343 | | | | | | | | 5100087R | | | | |
| 0.88 | 0.0346 | | | 5100088R | | | | | | | | | |
| 0.89 | 0.0350 | 65 | | 6.5 | | | | | 25.0 | 5100089R | | | |
| 0.90 | 0.0354 | | | | | | | | | 5100090R | | | |
| 0.91 | 0.0358 | 64 | | | | | | | | 5100091R | | | |
| 0.92 | 0.0362 | | | | | | | | | 5100092R | | | |
| 0.93 | 0.0366 | | | 5100093R | | | | | | | | | |
| 0.94 | 0.0370 | 63 | | 7.0 | | | | | | 25.0 | 5100094R | | |
| 0.95 | 0.0374 | | | | | | | | | | 5100095R | | |
| 0.96 | 0.0378 | 62 | | | | | | | | | 5100096R | | |
| 0.97 | 0.0382 | | | | | | | | | | 5100097R | | |
| 0.98 | 0.0386 | | | 5100098R | | | | | | | | | |
| 0.99 | 0.0390 | 61 | | 7.0 | | | | | | | 25.0 | 5100099R | |
| 1.00 | 0.0394 | | | | | | | | | | | 5100100R | |
| 1.01 | 0.0398 | 60 | | | | | | | | | | 5100101R | |
| 1.02 | 0.0402 | | | | | | | | | | | 5100102R | |
| 1.03 | 0.0406 | | | 5100103R | | | | | | | | | |
| 1.04 | 0.0409 | 59 | | 7.0 | | | | | | | | 25.0 | 5100104R |
| 1.05 | 0.0413 | | | | | | | | | | | | 5100105R |
| 1.06 | 0.0417 | | 5100106R | | | | | | | | | | |
| 1.07 | 0.0421 | 58 | 5100107R | | | | | | | | | | |
| 1.08 | 0.0425 | | 5100108R | | | | | | | | | | |
| 1.09 | 0.0429 | 57 | 5100109R | | | | | | | | | | |
| 1.10 | 0.0433 | | 5100110R | | | | | | | | | | |
| 1.11 | 0.0437 | | 5100111R | | | | | | | | | | |
| 1.12 | 0.0441 | | 5100112R | | | | | | | | | | |

5100 Series HSS-E Cobalt 8% - Drill Sizes 1.60 – 2.53mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|-------------------------|----------------------------|---------------------------------|-------------------------|
| 1.13 | 0.0445 | | 1.5 | 7.0 | 25.0 | 5100113R |
| 1.14 | 0.0449 | | | | | 5100114R |
| 1.15 | 0.0453 | | | | | 5100115R |
| 1.16 | 0.0457 | | | | | 5100116R |
| 1.17 | 0.0461 | | | 7.5 | | 5100117R |
| 1.18 | 0.0465 | 56 | | | | 5100118R |
| 1.19 | 0.0469 | 3/64 | | | | 5100119R |
| 1.20 | 0.0472 | | | | | 5100120R |
| 1.21 | 0.0476 | | | 5100121R | | |
| 1.22 | 0.0480 | | | 8.5 | | 5100122R |
| 1.23 | 0.0484 | | | | | 5100123R |
| 1.24 | 0.0488 | | | | | 5100124R |
| 1.25 | 0.0492 | | | | | 5100125R |
| 1.26 | 0.0496 | | | 25.0 | | 5100126R |
| 1.27 | 0.0500 | | | | | 5100127R |
| 1.28 | 0.0504 | | | | | 5100128R |
| 1.29 | 0.0508 | | 5100129R | | | |
| 1.30 | 0.0512 | | 1.5 | 25.0 | 5100130R | |
| 1.31 | 0.0516 | | | | 5100131R | |
| 1.32 | 0.0520 | 55 | | | 5100132R | |
| 1.33 | 0.0524 | | | | 5100133R | |
| 1.34 | 0.0528 | | 1.5 | 25.0 | 5100134R | |
| 1.35 | 0.0531 | | | | 5100135R | |
| 1.36 | 0.0535 | | | | 5100136R | |
| 1.37 | 0.0539 | | | | 5100137R | |
| 1.38 | 0.0543 | | 1.5 | 25.0 | 5100138R | |
| 1.39 | 0.0547 | | | | 5100139R | |
| 1.40 | 0.0551 | 54 | | | 5100140R | |
| 1.41 | 0.0555 | | | | 5100141R | |
| 1.42 | 0.0559 | | 1.5 | 25.0 | 5100142R | |
| 1.43 | 0.0563 | | | | 5100143R | |
| 1.44 | 0.0567 | | | | 5100144R | |
| 1.45 | 0.0571 | | | | 5100145R | |
| 1.46 | 0.0575 | | 1.5 | 25.0 | 5100146R | |
| 1.47 | 0.0579 | | | | 5100147R | |
| 1.48 | 0.0583 | | | | 5100148R | |
| 1.49 | 0.0587 | | | | 5100149R | |
| 1.50 | 0.0591 | | 1.5 | 25.0 | 5100150R | |
| 1.51 | 0.0594 | 53 | | | 5100151R | |
| 1.52 | 0.0598 | | | | 5100152R | |
| 1.53 | 0.0602 | | | | 5100153R | |
| 1.54 | 0.0606 | | 2.0 | 10.0 | 5100154R | |
| 1.55 | 0.0610 | | | | 5100155R | |
| 1.56 | 0.0614 | | | | 5100156R | |
| 1.57 | 0.0618 | | | | 5100157R | |
| 1.58 | 0.0622 | | 2.0 | 10.0 | 5100158R | |
| 1.59 | 0.0626 | 1/16 | | | 5100159R | |

Series 5100 Continued



5100 Series HSS-E Cobalt 8%

5 x D – Depth of Cut 120°, continued



5100 Series HSS-E Cobalt 8% - Drill Sizes 1.60 – 2.53mm

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|
| 1.60 | 0.0630 | | 1.0 | 10.0 | 35.0 | 5100160R |
| 1.61 | 0.0634 | 52 | | | | 5100161R |
| 1.62 | 0.0638 | | | | | 5100162R |
| 1.63 | 0.0642 | | | | | 5100163R |
| 1.64 | 0.0646 | | | | | 5100164R |
| 1.65 | 0.0650 | | | | | 5100165R |
| 1.66 | 0.0654 | | | | | 5100166R |
| 1.67 | 0.0657 | | | | | 5100167R |
| 1.68 | 0.0661 | | | | | 5100168R |
| 1.69 | 0.0665 | | | | | 5100169R |
| 1.70 | 0.0669 | 51 | | | | 5100170R |
| 1.71 | 0.0673 | | | | | 5100171R |
| 1.72 | 0.0677 | | | | | 5100172R |
| 1.73 | 0.0681 | | | | | 5100173R |
| 1.74 | 0.0685 | | | | | 5100174R |
| 1.75 | 0.0689 | | | | | 5100175R |
| 1.76 | 0.0693 | | | | | 5100176R |
| 1.77 | 0.0697 | | 5100177R | | | |
| 1.78 | 0.0701 | 50 | 5100178R | | | |
| 1.79 | 0.0705 | | 5100179R | | | |
| 1.80 | 0.0709 | | 5100180R | | | |
| 1.81 | 0.0713 | | 5100181R | | | |
| 1.82 | 0.0717 | | 5100182R | | | |
| 1.83 | 0.0720 | | 5100183R | | | |
| 1.84 | 0.0724 | | 5100184R | | | |
| 1.85 | 0.0728 | 49 | 5100185R | | | |
| 1.86 | 0.0732 | | 5100186R | | | |
| 1.87 | 0.0736 | | 5100187R | | | |
| 1.88 | 0.0740 | | 5100188R | | | |
| 1.89 | 0.0744 | | 5100189R | | | |
| 1.90 | 0.0748 | | 5100190R | | | |
| 1.91 | 0.0752 | | 5100191R | | | |
| 1.92 | 0.0756 | | 5100192R | | | |
| 1.93 | 0.0760 | 48 | 5100193R | | | |
| 1.94 | 0.0764 | | 5100194R | | | |
| 1.95 | 0.0768 | | 5100195R | | | |
| 1.96 | 0.0772 | | 5100196R | | | |
| 1.97 | 0.0776 | | 5100197R | | | |
| 1.98 | 0.0780 | 5/64 | 5100198R | | | |
| 1.99 | 0.0783 | 47 | 5100199R | | | |
| 2.00 | 0.0787 | | 5100200R | | | |
| 2.01 | 0.0791 | | 5100201R | | | |
| 2.02 | 0.0795 | | 5100202R | | | |
| 2.03 | 0.0799 | | 5100203R | | | |
| 2.04 | 0.0803 | | 5100204R | | | |
| 2.05 | 0.0807 | | 5100205R | | | |
| 2.06 | 0.0811 | 46 | 5100206R | | | |

5100 Series HSS-E Cobalt 8% - Drill Sizes 1.60 – 2.53mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|
| 2.07 | 0.0815 | | 2.5 | 12.0 | 35.0 | 5100207R |
| 2.08 | 0.0819 | 45 | | | | 5100208R |
| 2.09 | 0.0823 | | | | | 5100209R |
| 2.10 | 0.0827 | | | | | 5100210R |
| 2.11 | 0.0831 | | | | | 5100211R |
| 2.12 | 0.0835 | | | | | 5100212R |
| 2.13 | 0.0839 | | | | | 5100213R |
| 2.14 | 0.0843 | | | | | 5100214R |
| 2.15 | 0.0846 | | | | | 5100215R |
| 2.16 | 0.0850 | | | | | 5100216R |
| 2.17 | 0.0854 | | | | | 5100217R |
| 2.18 | 0.0858 | 44 | | | | 5100218R |
| 2.19 | 0.0862 | | | | | 5100219R |
| 2.20 | 0.0866 | | | | | 5100220R |
| 2.21 | 0.0870 | | | | | 5100221R |
| 2.22 | 0.0874 | | | | | 5100222R |
| 2.23 | 0.0878 | | | | | 5100223R |
| 2.24 | 0.0882 | | 5100224R | | | |
| 2.25 | 0.0886 | | 5100225R | | | |
| 2.26 | 0.0890 | 43 | 5100226R | | | |
| 2.27 | 0.0894 | | 5100227R | | | |
| 2.28 | 0.0898 | | 5100228R | | | |
| 2.29 | 0.0902 | | 5100229R | | | |
| 2.30 | 0.0906 | | 5100230R | | | |
| 2.31 | 0.0909 | | 5100231R | | | |
| 2.32 | 0.0913 | | 5100232R | | | |
| 2.33 | 0.0917 | | 5100233R | | | |
| 2.34 | 0.0921 | | 5100234R | | | |
| 2.35 | 0.0925 | | 5100235R | | | |
| 2.36 | 0.0929 | | 5100236R | | | |
| 2.37 | 0.0933 | | 5100237R | | | |
| 2.38 | 0.0937 | 3/32 | 5100238R | | | |
| 2.39 | 0.0941 | | 5100239R | | | |
| 2.40 | 0.0945 | | 5100240R | | | |
| 2.41 | 0.0949 | | 5100241R | | | |
| 2.42 | 0.0953 | | 5100242R | | | |
| 2.43 | 0.0957 | | 5100243R | | | |
| 2.44 | 0.0961 | 41 | 5100244R | | | |
| 2.45 | 0.0965 | | 5100245R | | | |
| 2.46 | 0.0969 | | 5100246R | | | |
| 2.47 | 0.0972 | | 5100247R | | | |
| 2.48 | 0.0976 | | 5100248R | | | |
| 2.49 | 0.0980 | 40 | 5100249R | | | |
| 2.50 | 0.0984 | | 5100250R | | | |
| 2.51 | 0.0988 | | 5100251R | | | |
| 2.52 | 0.0992 | | 5100252R | | | |
| 2.53 | 0.0996 | 39 | 5100253R | | | |

Series 5100 Continued

5100 Series HSS-E Cobalt 8%

5 x D – Depth of Cut 120°, continued

5100 Series HSS-E Cobalt 8% - Drill Sizes 2.54 – 3.00mm

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|----------------------|----------------------------|---------------------------------|-------------------------|
| 2.54 | 0.1000 | | 3.0 | 16.0 | 40.0 | 5100254R |
| 2.55 | 0.1004 | | | | | 5100255R |
| 2.56 | 0.1008 | | | | | 5100256R |
| 2.57 | 0.1012 | | | | | 5100257R |
| 2.58 | 0.1016 | 38 | | | | 5100258R |
| 2.59 | 0.1020 | | | | | 5100259R |
| 2.60 | 0.1024 | | | | | 5100260R |
| 2.61 | 0.1028 | | | | | 5100261R |
| 2.62 | 0.1031 | | | | | 5100262R |
| 2.63 | 0.1035 | | | | | 5100263R |
| 2.64 | 0.1039 | 37 | | | | 5100264R |
| 2.65 | 0.1043 | | | | | 5100265R |
| 2.66 | 0.1047 | | | | | 5100266R |
| 2.67 | 0.1051 | | | | | 5100267R |
| 2.68 | 0.1055 | | | | | 5100268R |
| 2.69 | 0.1059 | | | | | 5100269R |
| 2.70 | 0.1063 | 36 | | | | 5100270R |
| 2.71 | 0.1067 | | | | | 5100271R |
| 2.72 | 0.1071 | | | | | 5100272R |
| 2.73 | 0.1075 | | | | | 5100273R |
| 2.74 | 0.1079 | | | 5100274R | | |
| 2.75 | 0.1083 | | | 5100275R | | |
| 2.76 | 0.1087 | | | 5100276R | | |
| 2.77 | 0.1091 | | | 18.0 | 5100277R | |

5100 Series HSS-E Cobalt 8% - Drill Sizes 2.54 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|----------------------|----------------------------|---------------------------------|-------------------------|
| 2.78 | 0.1094 | 7/64 | 3.0 | 18.0 | 40.0 | 5100278R |
| 2.79 | 0.1098 | 35 | | | | 5100279R |
| 2.80 | 0.1102 | | | | | 5100280R |
| 2.81 | 0.1106 | | | | | 5100281R |
| 2.82 | 0.1110 | 34 | | | | 5100282R |
| 2.83 | 0.1114 | | | | | 5100283R |
| 2.84 | 0.1118 | | | | | 5100284R |
| 2.85 | 0.1122 | | | | | 5100285R |
| 2.86 | 0.1126 | | | | | 5100286R |
| 2.87 | 0.1130 | 33 | | | | 5100287R |
| 2.88 | 0.1134 | | | | | 5100288R |
| 2.89 | 0.1138 | | | | | 5100289R |
| 2.90 | 0.1142 | | | | | 5100290R |
| 2.91 | 0.1146 | | | | | 5100291R |
| 2.92 | 0.1150 | | | | | 5100292R |
| 2.93 | 0.1154 | | | | | 5100293R |
| 2.94 | 0.1157 | | | | | 5100294R |
| 2.95 | 0.1161 | 32 | | | | 5100295R |
| 2.96 | 0.1165 | | | | | 5100296R |
| 2.97 | 0.1169 | | | | | 5100297R |
| 2.98 | 0.1173 | | | | | 5100298R |
| 2.99 | 0.1177 | | | | | 5100299R |
| 3.00 | 0.1181 | | | | | 5100300R |

5100 Series HSS-E Cobalt 8%



- For materials with long forming chips, steel up to 35 RHC, Copper, Stainless, Titanium
- Amazing dimension control at h6, h4 & h3 μm tolerances
- Ultra-fine surface finish for smooth operation
- Superb heat treating for outstanding performance & long tool life
- Coatings available upon request

6140 Series Solid Carbide

2-3 x D, Center Cut – Pilot – Spot Drills 120°




+ 0.000/- 0.006mm (h6) Uncoated Version
 + 0.002/-0.004mm Coated Version

For use prior to using 6120 and 6100 series drills. Can also be used as a drill with 2–3 x D depth.
 All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 30°, 35° or other
- Point angles of 90°, 110°, 130°, 140° or other
- Special diameters as 0.92mm or other
- Special tolerances as +/- 0.001mm or other
- Coolant thru drills at 3 and 4mm shanks and 1.25 to 3mm flute diameters
- Coatings available upon request
- Minimum custom order is 10 Pieces
- 4mm for specials
- **Lead-time on custom orders—4 Weeks ARO**

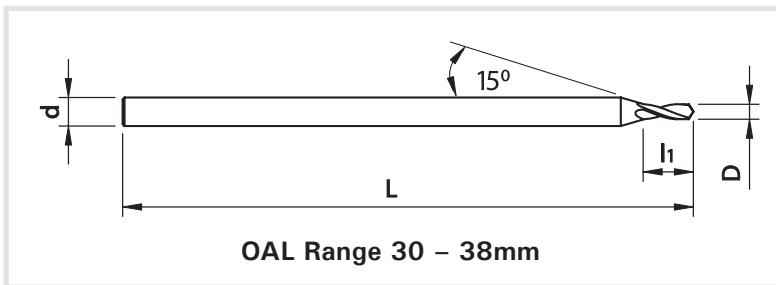

Non-stock allow 4 weeks for delivery

6140 Series Solid Carbide* - Drill Sizes 0.20 – 3.00mm

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|--------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.20 | 0.0079 | 92 | 1.5 | .9 | 30.0 | 6140020R | - |
| 0.25 | 0.0098 | | | | | 6140025R | - |
| 0.30 | 0.0118 | | | | | 6140030R | - |
| 0.35 | 0.0138 | | | | | 6140035R | - |
| 0.40 | 0.0157 | | | | | 6140040R | - |
| 0.45 | 0.0177 | | | | | 6140045R | - |
| 0.50 | 0.0197 | | | 6140050R | 6140050RC | | |
| 0.55 | 0.0217 | | | 6140055R | 6140055RC | | |
| 0.60 | 0.0236 | | | 6140060R | 6140060RC | | |
| 0.65 | 0.0256 | | | 6140065R | 6140065RC | | |
| 0.70 | 0.0276 | | | 6140070R | 6140070RC | | |
| 0.75 | 0.0295 | | | 6140075R | 6140075RC | | |
| 0.80 | 0.0315 | | | 6140080R | 6140080RC | | |
| 0.85 | 0.0335 | | | 6140085R | 6140085RC | | |
| 0.90 | 0.0354 | | | 6140090R | 6140090RC | | |
| 0.95 | 0.0374 | | | 6140095R | 6140095RC | | |
| 1.00 | 0.0394 | | 6140100R | 6140100RC | | | |
| 1.05 | 0.0413 | | 6140105R | 6140105RC | | | |
| 1.10 | 0.0433 | | 6140110R | 6140110RC | | | |
| 1.15 | 0.0453 | | 6140115R | 6140115RC | | | |
| 1.20 | 0.0472 | | 6140120R | 6140120RC | | | |

6140 Series Solid Carbide - Drill Sizes 0.20 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. | |
|-------------------|---------------------------------|--------|-------------------|----------------------|---------------------------|----------------------|---------------------------|-----------|
| 1.25 | 0.0492 | | 1.5 | 4.2 | 30.0 | 6140125R | 6140125RC | |
| 1.30 | 0.0512 | | | | | 6140130R | 6140130RC | |
| 1.35 | 0.0531 | | | | | 6140135R | 6140135RC | |
| 1.40 | 0.0551 | 54 | | 4.7 | | 38.0 | 6140140R | 6140140RC |
| 1.45 | 0.0571 | | | | | | 6140145R | 6140145RC |
| 1.50 | 0.0591 | | | | | | 6140150R | 6140150RC |
| 1.60 | 0.0630 | 51 | 5.4 | 38.0 | 6140160R | | 6140160RC | |
| 1.70 | 0.0669 | | | | 6140170R | | 6140170RC | |
| 1.80 | 0.0709 | | | | 6140180R | | 6140180RC | |
| 1.90 | 0.0748 | | 6.5 | | 38.0 | 6140190R | 6140190RC | |
| 2.00 | 0.0787 | | | | | 6140200R | 6140200RC | |
| 2.10 | 0.0827 | | | | | 6140210R | 6140210RC | |
| 2.20 | 0.0866 | | 6.5 | 38.0 | | 6140220R | 6140220RC | |
| 2.30 | 0.0906 | | | | | 6140230R | 6140230RC | |
| 2.40 | 0.0945 | | | | | 6140240R | 6140240RC | |
| 2.50 | 0.0984 | | 7.5 | | 38.0 | 6140250R | 6140250RC | |
| 2.60 | 0.1024 | | | | | 6140260R | 6140260RC | |
| 2.70 | 0.1063 | | | | | 6140270R | 6140270RC | |
| 2.80 | 0.1102 | | 7.5 | 38.0 | | 6140280R | 6140280RC | |
| 2.90 | 0.1142 | | | | | 6140290R | 6140290RC | |
| 3.00 | 0.1181 | | | | | 6140300R | 6140300RC | |


***SPECIAL ORDERS:** Series 6140 flute diameters coated sizes smaller than 0.50mm are special order. Please contact Pilot Precision Products for details at 413-350-5200.

6130 Series Solid Carbide

4-5 x D – Depth of Cut 120°



h6 Tolerance Reinforced Shank d 3.0mm




+ 0.000/- 0.006mm (h6) Uncoated Version
+ 0.002/-0.004mm Coated Version

For soft, medium to high tensile strength steel, stainless, titanium alloys and cast iron.
All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 30°, 35° or other
- Point Angles of 90°, 110°, 130°, 140° or other
- Special Diameters as 1.255mm or other
- Special Tolerances as +/- 0.001mm or other
- Minimum custom order is 10 pieces
- 4mm for specials
- **Lead-Time on custom orders—4 Weeks ARO**

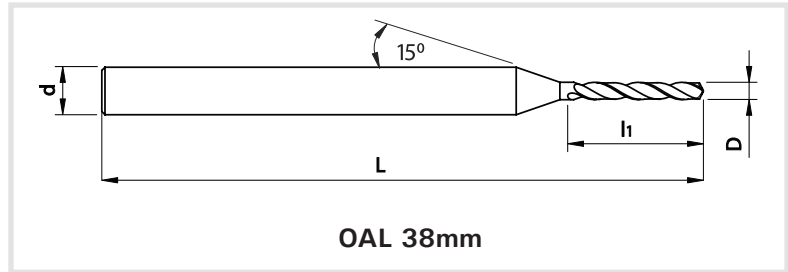

OAL 38mm

Non-stock: allow 4 weeks for delivery

6130 Series Solid Carbide - Drill Sizes 0.20 – 0.88mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|-------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.20 | 0.0079 | 92 | 3.0 | 1.1 | 38.0 | 6130020R | - |
| 0.21 | 0.0083 | 91 | | | | 6130021R | - |
| 0.22 | 0.0087 | 90 | | | | 6130022R | - |
| 0.23 | 0.0091 | 89 | | | | 6130023R | - |
| 0.24 | 0.0094 | 88 | | | | 6130024R | - |
| 0.25 | 0.0098 | | | | | 6130025R | - |
| 0.26 | 0.0102 | | | 6130026R | | - | |
| 0.27 | 0.0106 | 86 | | 6130027R | | - | |
| 0.28 | 0.0110 | 85 | | 6130028R | | - | |
| 0.29 | 0.0114 | 84 | | 6130029R | | - | |
| 0.30 | 0.0118 | | | 6130030R | | - | |
| 0.31 | 0.0122 | | | 6130031R | | - | |
| 0.32 | 0.0126 | 82 | | 6130032R | | - | |
| 0.33 | 0.0130 | 81 | | 6130033R | | - | |
| 0.34 | 0.0134 | 80 | | 6130034R | | - | |
| 0.35 | 0.0138 | | | 6130035R | | - | |
| 0.36 | 0.0142 | | | 6130036R | | - | |
| 0.37 | 0.0146 | 79 | | 6130037R | | - | |
| 0.38 | 0.0150 | | | 6130038R | | - | |
| 0.39 | 0.0154 | | | 6130039R | | - | |
| 0.40 | 0.0157 | | | 6130040R | | - | |
| 0.41 | 0.0161 | 78 | | 6130041R | | - | |
| 0.42 | 0.0165 | | | 6130042R | | - | |
| 0.43 | 0.0169 | | | 6130043R | | - | |
| 0.44 | 0.0173 | | | 6130044R | | - | |
| 0.45 | 0.0177 | | | 6130045R | | - | |
| 0.46 | 0.0181 | 77 | | 6130046R | | - | |
| 0.47 | 0.0185 | | | 6130047R | | - | |
| 0.48 | 0.0189 | | | 6130048R | | - | |
| 0.49 | 0.0193 | | | 6130049R | | - | |
| 0.50 | 0.0197 | | | 6130050R | | 6130050RC | |
| 0.51 | 0.0201 | 76 | | 6130051R | | 6130051RC | |
| 0.52 | 0.0205 | | | 6130052R | | 6130052RC | |
| 0.53 | 0.0209 | 75 | | 6130053R | | 6130053RC | |
| 0.54 | 0.0213 | | 6130054R | 6130054RC | | | |

6130 Series Solid Carbide - Drill Sizes 0.20 – 0.88mm

| D Flute Dia. (mm) | Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|-------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.55 | 0.0217 | | 3.0 | 2.8 | 38.0 | 6130055R | 6130055RC |
| 0.56 | 0.0220 | | | | | 6130056R | 6130056RC |
| 0.57 | 0.0224 | 74 | | | | 6130057R | 6130057RC |
| 0.58 | 0.0228 | | | | | 6130058R | 6130058RC |
| 0.59 | 0.0232 | | | | | 6130059R | 6130059RC |
| 0.60 | 0.0236 | | | | | 6130060R | 6130060RC |
| 0.61 | 0.0240 | 73 | | 6130061R | | 6130061RC | |
| 0.62 | 0.0244 | | | 6130062R | | 6130062RC | |
| 0.63 | 0.0248 | 72 | | 6130063R | | 6130063RC | |
| 0.64 | 0.0252 | | | 6130064R | | 6130064RC | |
| 0.65 | 0.0256 | | | 6130065R | | 6130065RC | |
| 0.66 | 0.0260 | 71 | | 6130066R | | 6130066RC | |
| 0.67 | 0.0264 | | | 6130067R | | 6130067RC | |
| 0.68 | 0.0268 | | | 6130068R | | 6130068RC | |
| 0.69 | 0.0272 | | | 6130069R | | 6130069RC | |
| 0.70 | 0.0276 | | | 6130070R | | 6130070RC | |
| 0.71 | 0.0280 | 70 | | 6130071R | | 6130071RC | |
| 0.72 | 0.0283 | | | 6130072R | | 6130072RC | |
| 0.73 | 0.0287 | | | 6130073R | | 6130073RC | |
| 0.74 | 0.0291 | 69 | | 6130074R | | 6130074RC | |
| 0.75 | 0.0295 | | | 6130075R | | 6130075RC | |
| 0.76 | 0.0299 | | | 6130076R | | 6130076RC | |
| 0.77 | 0.0303 | | | 6130077R | | 6130077RC | |
| 0.78 | 0.0307 | | | 6130078R | | 6130078RC | |
| 0.79 | 0.0311 | 68-1/32 | | 6130079R | | 6130079RC | |
| 0.80 | 0.0315 | | | 6130080R | | 6130080RC | |
| 0.81 | 0.0319 | 67 | | 6130081R | | 6130081RC | |
| 0.82 | 0.0323 | | | 6130082R | | 6130082RC | |
| 0.83 | 0.0327 | | | 6130083R | | 6130083RC | |
| 0.84 | 0.0331 | 66 | | 6130084R | | 6130084RC | |
| 0.85 | 0.0335 | | | 6130085R | | 6130085RC | |
| 0.86 | 0.0339 | | | 6130086R | | 6130086RC | |
| 0.87 | 0.0343 | | | 6130087R | | 6130087RC | |
| 0.88 | 0.0346 | | | 6130088R | | 6130088RC | |

Series 6130 Continued

***SPECIAL ORDERS:** Series 6130 flute diameters coated sizes smaller than 0.50mm are special order. Please contact Pilot Precision Products for details.

6130 Series Solid Carbide

4-5 x D – Depth of Cut 120°, continued

Non-stock: allow 4 weeks for delivery

6130 Series Solid Carbide - Drill Sizes 0.89–1.99 mm x 3mm Shank Tools

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------------|--|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 0.89 | 0.0350 | 65 | 3.0 | 4.8 | 38.0 | 6130089R | 6130089RC |
| 0.90 | 0.0354 | | | | | 6130090R | 6130090RC |
| 0.91 | 0.0358 | 64 | | | | 6130091R | 6130091RC |
| 0.92 | 0.0362 | | | | | 6130092R | 6130092RC |
| 0.93 | 0.0366 | | | | | 6130093R | 6130093RC |
| 0.94 | 0.0370 | 63 | | | | 6130094R | 6130094RC |
| 0.95 | 0.0374 | | | | | 6130095R | 6130095RC |
| 0.96 | 0.0378 | 62 | | | | 6130096R | 6130096RC |
| 0.97 | 0.0382 | | | | | 6130097R | 6130097RC |
| 0.98 | 0.0386 | | | | | 6130098R | 6130098RC |
| 0.99 | 0.0390 | 61 | | | | 6130099R | 6130099RC |
| 1.00 | 0.0394 | | | | | 6130100R | 6130100RC |
| 1.01 | 0.0398 | 60 | | | | 6130101R | 6130101RC |
| 1.02 | 0.0402 | | | | | 6130102R | 6130102RC |
| 1.03 | 0.0406 | | | | | 6130103R | 6130103RC |
| 1.04 | 0.0409 | 59 | | | | 6130104R | 6130104RC |
| 1.05 | 0.0413 | | | | | 6130105R | 6130105RC |
| 1.06 | 0.0417 | | | | | 6130106R | 6130106RC |
| 1.07 | 0.0421 | 58 | | | | 6130107R | 6130107RC |
| 1.08 | 0.0425 | | | | | 6130108R | 6130108RC |
| 1.09 | 0.0429 | 57 | | 6130109R | | 6130109RC | |
| 1.100 | 0.0433 | | | 6130110R | | 6130110RC | |
| 1.11 | 0.0437 | | | 6130111R | | 6130111RC | |
| 1.12 | 0.0441 | | | 6130112R | | 6130112RC | |
| 1.13 | 0.0445 | | | 6130113R | | 6130113RC | |
| 1.14 | 0.0449 | | | 6130114R | | 6130114RC | |
| 1.15 | 0.0453 | | | 6130115R | | 6130115RC | |
| 1.16 | 0.0457 | | | 6130116R | | 6130116RC | |
| 1.17 | 0.0461 | | | 6130117R | | 6130117RC | |
| 1.18 | 0.0465 | 56 | | 6130118R | | 6130118RC | |
| 1.19 | 0.0469 | 3/64 | | 6130119R | | 6130119RC | |
| 1.20 | 0.0472 | | | 6130120R | | 6130120RC | |
| 1.21 | 0.0476 | | | 6130121R | | 6130121RC | |
| 1.22 | 0.0480 | | | 6130122R | | 6130122RC | |
| 1.23 | 0.0484 | | | 6130123R | | 6130123RC | |
| 1.24 | 0.0488 | | | 6130124R | | 6130124RC | |
| 1.25 | 0.0492 | | | 6130125R | | 6130125RC | |
| 1.26 | 0.0496 | | | 6130126R | | 6130126RC | |
| 1.27 | 0.0500 | | | 6130127R | | 6130127RC | |
| 1.28 | 0.0504 | | | 6130128R | | 6130128RC | |
| 1.29 | 0.0508 | | 6130129R | 6130129RC | | | |
| 1.30 | 0.0512 | | 6130130R | 6130130RC | | | |
| 1.31 | 0.0516 | | 6130131R | 6130131RC | | | |
| 1.32 | 0.0520 | 55 | 6130132R | 6130132RC | | | |
| 1.33 | 0.0524 | | 6130133R | 6130133RC | | | |
| 1.34 | 0.0528 | | 6130134R | 6130134RC | | | |
| 1.35 | 0.0531 | | 6130135R | 6130135RC | | | |
| 1.36 | 0.0535 | | 6130136R | 6130136RC | | | |
| 1.37 | 0.0539 | | 6130137R | 6130137RC | | | |
| 1.38 | 0.0543 | | 6130138R | 6130138RC | | | |
| 1.39 | 0.0547 | | 6130139R | 6130139RC | | | |
| 1.40 | 0.0551 | 54 | 6130140R | 6130140RC | | | |
| 1.41 | 0.0555 | | 6130141R | 6130141RC | | | |
| 1.42 | 0.0559 | | 6130142R | 6130142RC | | | |
| 1.43 | 0.0563 | | 6130143R | 6130143RC | | | |
| 1.44 | 0.0567 | | 6130144R | 6130144RC | | | |

6130 Series Solid Carbide - Drill Sizes 0.89–1.99 mm x 3mm Shank Tools

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------------|--|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 1.45 | 0.0571 | | 3.0 | 6.7 | 38.0 | 6130145R | 6130145RC |
| 1.46 | 0.0575 | | | | | 6130146R | 6130146RC |
| 1.47 | 0.0579 | | | | | 6130147R | 6130147RC |
| 1.48 | 0.0583 | | | | | 6130148R | 6130148RC |
| 1.49 | 0.0587 | | | | | 6130149R | 6130149RC |
| 1.50 | 0.0591 | | | | | 6130150R | 6130150RC |
| 1.51 | 0.0594 | 53 | | | | 6130151R | 6130151RC |
| 1.52 | 0.0598 | | | | | 6130152R | 6130152RC |
| 1.53 | 0.0602 | | | | | 6130153R | 6130153RC |
| 1.54 | 0.0606 | | | | | 6130154R | 6130154RC |
| 1.55 | 0.0610 | | | 6130155R | | 6130155RC | |
| 1.56 | 0.0614 | | | 6130156R | | 6130156RC | |
| 1.57 | 0.0618 | | | 6130157R | | 6130157RC | |
| 1.58 | 0.0622 | | | 6130158R | | 6130158RC | |
| 1.59 | 0.0626 | 1/16 | | 6130159R | | 6130159RC | |
| 1.60 | 0.0630 | | | 6130160R | | 6130160RC | |
| 1.61 | 0.0634 | 52 | | 6130161R | | 6130161RC | |
| 1.62 | 0.0638 | | | 6130162R | | 6130162RC | |
| 1.63 | 0.0642 | | | 6130163R | | 6130163RC | |
| 1.64 | 0.0646 | | | 6130164R | | 6130164RC | |
| 1.65 | 0.0650 | | 6130165R | 6130165RC | | | |
| 1.66 | 0.0654 | | 6130166R | 6130166RC | | | |
| 1.67 | 0.0657 | | 6130167R | 6130167RC | | | |
| 1.68 | 0.0661 | | 6130168R | 6130168RC | | | |
| 1.69 | 0.0665 | | 6130169R | 6130169RC | | | |
| 1.70 | 0.0669 | 51 | 6130170R | 6130170RC | | | |
| 1.71 | 0.0673 | | 6130171R | 6130171RC | | | |
| 1.72 | 0.0677 | | 6130172R | 6130172RC | | | |
| 1.73 | 0.0681 | | 6130173R | 6130173RC | | | |
| 1.74 | 0.0685 | | 6130174R | 6130174RC | | | |
| 1.75 | 0.0689 | | 6130175R | 6130175RC | | | |
| 1.76 | 0.0693 | | 6130176R | 6130176RC | | | |
| 1.77 | 0.0697 | | 6130177R | 6130177RC | | | |
| 1.78 | 0.0701 | 50 | 6130178R | 6130178RC | | | |
| 1.79 | 0.0705 | | 6130179R | 6130179RC | | | |
| 1.80 | 0.0709 | | 6130180R | 6130180RC | | | |
| 1.81 | 0.0713 | | 6130181R | 6130181RC | | | |
| 1.82 | 0.0717 | | 6130182R | 6130182RC | | | |
| 1.83 | 0.0720 | | 6130183R | 6130183RC | | | |
| 1.84 | 0.0724 | | 6130184R | 6130184RC | | | |
| 1.85 | 0.0728 | 49 | 6130185R | 6130185RC | | | |
| 1.86 | 0.0732 | | 6130186R | 6130186RC | | | |
| 1.87 | 0.0736 | | 6130187R | 6130187RC | | | |
| 1.88 | 0.0740 | | 6130188R | 6130188RC | | | |
| 1.89 | 0.0744 | | 6130189R | 6130189RC | | | |
| 1.90 | 0.0748 | | 6130190R | 6130190RC | | | |
| 1.91 | 0.0752 | | 6130191R | 6130191RC | | | |
| 1.92 | 0.0756 | | 6130192R | 6130192RC | | | |
| 1.93 | 0.0760 | 48 | 6130193R | 6130193RC | | | |
| 1.94 | 0.0764 | | 6130194R | 6130194RC | | | |
| 1.95 | 0.0768 | | 6130195R | 6130195RC | | | |
| 1.96 | 0.0772 | | 6130196R | 6130196RC | | | |
| 1.97 | 0.0776 | | 6130197R | 6130197RC | | | |
| 1.98 | 0.0780 | 5/64 | 6130198R | 6130198RC | | | |
| 1.99 | 0.0783 | 47 | 6130199R | 6130199RC | | | |

NOTE: For 2.00 to 3.00mm x 3mm Shank go to 6120 Series

6120 Series Solid Carbide

4-5 x D – Depth of Cut 120°



10% COBALT
MICRO
GRAIN
CARBIDE

RH

120°
Point

35°
Helix

2
FLUTES

HARDNESS
1570=
HV30

h6


+ 0.000/- 0.006mm (h6) Uncoated Version
+ 0.002/-0.004mm Coated Version

For medium to high tensile strength steel, stainless, titanium alloys and cast iron.

All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 24°, 30° or other
- Point angles of 90°, 110°, 130°, 140° or other
- Special diameters as 1.255mm or other
- Special tolerances as +/- 0.001mm or other
- Coolant thru drills at 3 and 4mm shanks and 1.25 to 3mm flute diameters
- Coatings available upon request
- Minimum custom order is 10 Pieces / Spec.
- 4mm max for specials
- **Lead-time on custom orders—4 Weeks ARO**

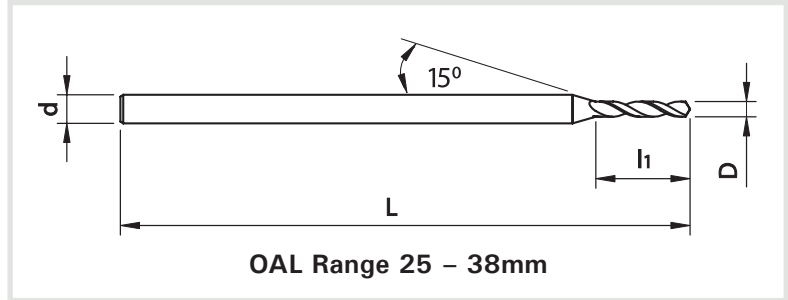

 Non-stock: allow 4 weeks for delivery

6120 Series Solid Carbide - Drill Sizes 0.20 – 0.71mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------------|-------------------------------------|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 0.20 | 0.0079 | 92 | 1.0 | 1.1 | 25.0 | 6120020R | - |
| 0.21 | 0.0083 | 91 | | | | 6120021R | - |
| 0.22 | 0.0087 | 90 | | | | 6120022R | - |
| 0.23 | 0.0091 | 89 | | | | 6120023R | - |
| 0.24 | 0.0094 | 88 | | | | 6120024R | - |
| 0.25 | 0.0098 | | | | | 6120025R | - |
| 0.26 | 0.0102 | | | | | 6120026R | - |
| 0.27 | 0.0106 | 86 | | | | 6120027R | - |
| 0.28 | 0.0110 | 85 | | | | 6120028R | - |
| 0.29 | 0.0114 | 84 | | | | 6120029R | - |
| 0.30 | 0.0118 | | | 6120030R | | - | |
| 0.31 | 0.0122 | | | 6120031R | | - | |
| 0.32 | 0.0126 | 82 | | 6120032R | | - | |
| 0.33 | 0.0130 | 81 | | 6120033R | | - | |
| 0.34 | 0.0134 | 80 | | 6120034R | | - | |
| 0.35 | 0.0138 | | | 6120035R | | - | |
| 0.36 | 0.0142 | | | 6120036R | | - | |
| 0.37 | 0.0146 | 79 | | 6120037R | | - | |
| 0.38 | 0.0150 | | | 6120038R | | - | |
| 0.39 | 0.0154 | | | 6120039R | | - | |
| 0.40 | 0.0157 | | 6120040R | - | | | |
| 0.41 | 0.0161 | 78 | 6120041R | - | | | |
| 0.42 | 0.0165 | | 6120042R | - | | | |
| 0.43 | 0.0169 | | 6120043R | - | | | |
| 0.44 | 0.0173 | | 6120044R | - | | | |
| 0.45 | 0.0177 | | 6120045R | - | | | |

6120 Series Solid Carbide - Drill Sizes 0.20 – 0.71mm

| D Flute Dia. (mm) | Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------------|-------------------------------------|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 0.46 | 0.0181 | 77 | 1.0 | 2.0 | 25.0 | 6120046R | - |
| 0.47 | 0.0185 | | | | | 6120047R | - |
| 0.48 | 0.0189 | | | | | 6120048R | - |
| 0.49 | 0.0193 | | | | | 6120049R | - |
| 0.50 | 0.0197 | | | | | 6120050R | 6120050RC |
| 0.51 | 0.0201 | 76 | | 2.4 | | 6120051R | 6120051RC |
| 0.52 | 0.0205 | | | | | 6120052R | 6120052RC |
| 0.53 | 0.0209 | 75 | | | | 6120053R | 6120053RC |
| 0.54 | 0.0213 | | | | | 6120054R | 6120054RC |
| 0.55 | 0.0217 | | | | | 6120055R | 6120055RC |
| 0.56 | 0.0220 | | 1.5 | 2.8 | 6120056R | 6120056RC | |
| 0.57 | 0.0224 | 74 | | | 6120057R | 6120057RC | |
| 0.58 | 0.0228 | | | | 6120058R | 6120058RC | |
| 0.59 | 0.0232 | | | | 6120059R | 6120059RC | |
| 0.60 | 0.0236 | | | | 6120060R | 6120060RC | |
| 0.61 | 0.0240 | 73 | 1.5 | 3.3 | 6120061R | 6120061RC | |
| 0.62 | 0.0244 | | | | 6120062R | 6120062RC | |
| 0.63 | 0.0248 | 72 | | | 6120063R | 6120063RC | |
| 0.64 | 0.0252 | | | | 6120064R | 6120064RC | |
| 0.65 | 0.0256 | | | | 6120065R | 6120065RC | |
| 0.66 | 0.0260 | 71 | | 3.8 | 6120066R | 6120066RC | |
| 0.67 | 0.0264 | | | | 6120067R | 6120067RC | |
| 0.68 | 0.0268 | | | | 6120068R | 6120068RC | |
| 0.69 | 0.0272 | | | | 6120069R | 6120069RC | |
| 0.70 | 0.0276 | | | | 6120070R | 6120070RC | |
| 0.71 | 0.0280 | 70 | | 6120071R | 6120071RC | | |

Series 6120 Continued

***SPECIAL ORDERS:** Series 6120 flute diameters coated sizes smaller than 0.50mm are special order. Please contact Pilot Precision Products for details.

6120 Series Solid Carbide

4-5 x D – Depth of Cut 120°, continued



Non-stock allow 4 weeks for delivery

6120 Series Solid Carbide - Drill Sizes 0.72 – 1.65mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.72 | 0.0283 | | 1.5 | 3.8 | 30.0 | 6120072R | 6120072RC |
| 0.73 | 0.0287 | | | | | 6120073R | 6120073RC |
| 0.74 | 0.0291 | 69 | | | | 6120074R | 6120074RC |
| 0.75 | 0.0295 | | | | | 6120075R | 6120075RC |
| 0.76 | 0.0299 | | | | | 6120076R | 6120076RC |
| 0.77 | 0.0303 | | | | | 6120077R | 6120077RC |
| 0.78 | 0.0307 | | | 6120078R | | 6120078RC | |
| 0.79 | 0.0311 | 68-1/32 | | 6120079R | | 6120079RC | |
| 0.80 | 0.0315 | | | 6120080R | | 6120080RC | |
| 0.81 | 0.0319 | 67 | | 6120081R | | 6120081RC | |
| 0.82 | 0.0323 | | | 6120082R | | 6120082RC | |
| 0.83 | 0.0327 | | | 6120083R | | 6120083RC | |
| 0.84 | 0.0331 | 66 | | 6120084R | | 6120084RC | |
| 0.85 | 0.0335 | | | 6120085R | | 6120085RC | |
| 0.86 | 0.0339 | | | 6120086R | | 6120086RC | |
| 0.87 | 0.0343 | | | 6120087R | | 6120087RC | |
| 0.88 | 0.0346 | | | 6120088R | | 6120088RC | |
| 0.89 | 0.0350 | 65 | | 6120089R | | 6120089RC | |
| 0.90 | 0.0354 | | 6120090R | 6120090RC | | | |
| 0.91 | 0.0358 | 64 | 6120091R | 6120091RC | | | |
| 0.92 | 0.0362 | | 6120092R | 6120092RC | | | |
| 0.93 | 0.0366 | | 6120093R | 6120093RC | | | |
| 0.94 | 0.0370 | 63 | 6120094R | 6120094RC | | | |
| 0.95 | 0.0374 | | 6120095R | 6120095RC | | | |
| 0.96 | 0.0378 | 62 | 6120096R | 6120096RC | | | |
| 0.97 | 0.0382 | | 6120097R | 6120097RC | | | |
| 0.98 | 0.0386 | | 6120098R | 6120098RC | | | |
| 0.99 | 0.0390 | 61 | 6120099R | 6120099RC | | | |
| 1.00 | 0.0394 | | 6120100R | 6120100RC | | | |
| 1.01 | 0.0398 | 60 | 6120101R | 6120101RC | | | |
| 1.02 | 0.0402 | | 6120102R | 6120102RC | | | |
| 1.03 | 0.0406 | | 6120103R | 6120103RC | | | |
| 1.04 | 0.0409 | 59 | 6120104R | 6120104RC | | | |
| 1.05 | 0.0413 | | 6120105R | 6120105RC | | | |
| 1.06 | 0.0417 | | 6120106R | 6120106RC | | | |
| 1.07 | 0.0421 | 58 | 6120107R | 6120107RC | | | |
| 1.08 | 0.0425 | | 6120108R | 6120108RC | | | |
| 1.09 | 0.0429 | 57 | 6120109R | 6120109RC | | | |
| 1.10 | 0.0433 | | 6120110R | 6120110RC | | | |
| 1.11 | 0.0437 | | 6120111R | 6120111RC | | | |
| 1.12 | 0.0441 | | 6120112R | 6120112RC | | | |
| 1.13 | 0.0445 | | 6120113R | 6120113RC | | | |
| 1.14 | 0.0449 | | 6120114R | 6120114RC | | | |
| 1.15 | 0.0453 | | 6120115R | 6120115RC | | | |
| 1.16 | 0.0457 | | 6120116R | 6120116RC | | | |
| 1.17 | 0.0461 | | 6120117R | 6120117RC | | | |
| 1.18 | 0.0465 | 56 | 6120118R | 6120118RC | | | |

6120 Series Solid Carbide - Drill Sizes 0.72 – 1.65mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 1.19 | 0.0469 | 3/64 | 1.5 | 5.4 | 30.0 | 6120119R | 6120119RC |
| 1.20 | 0.0472 | | | 6120120R | | 6120120RC | |
| 1.21 | 0.0476 | | | 6120121R | | 6120121RC | |
| 1.22 | 0.0480 | | | 6120122R | | 6120122RC | |
| 1.23 | 0.0484 | | | 6120123R | | 6120123RC | |
| 1.24 | 0.0488 | | | 6120124R | | 6120124RC | |
| 1.25 | 0.0492 | | | 6120125R | | 6120125RC | |
| 1.26 | 0.0496 | | | 6120126R | | 6120126RC | |
| 1.27 | 0.0500 | | | 6120127R | | 6120127RC | |
| 1.28 | 0.0504 | | | 6120128R | | 6120128RC | |
| 1.29 | 0.0508 | | | 6120129R | | 6120129RC | |
| 1.30 | 0.0512 | | | 6120130R | | 6120130RC | |
| 1.31 | 0.0516 | | 6120131R | 6120131RC | | | |
| 1.32 | 0.0520 | 55 | 2.0 | 7.2 | 6120132R | 6120132RC | |
| 1.33 | 0.0524 | | | | 6120133R | 6120133RC | |
| 1.34 | 0.0528 | | | | 6120134R | 6120134RC | |
| 1.35 | 0.0531 | | | | 6120135R | 6120135RC | |
| 1.36 | 0.0535 | | | | 6120136R | 6120136RC | |
| 1.37 | 0.0539 | | | | 6120137R | 6120137RC | |
| 1.38 | 0.0543 | | | | 6120138R | 6120138RC | |
| 1.39 | 0.0547 | | | | 6120139R | 6120139RC | |
| 1.40 | 0.0551 | 54 | | | 6120140R | 6120140RC | |
| 1.41 | 0.0555 | | | | 6120141R | 6120141RC | |
| 1.42 | 0.0559 | | | | 6120142R | 6120142RC | |
| 1.43 | 0.0563 | | | | 6120143R | 6120143RC | |
| 1.44 | 0.0567 | | 6120144R | 6120144RC | | | |
| 1.45 | 0.0571 | | 6120145R | 6120145RC | | | |
| 1.46 | 0.0575 | | 6120146R | 6120146RC | | | |
| 1.47 | 0.0579 | | 6120147R | 6120147RC | | | |
| 1.48 | 0.0583 | | 6120148R | 6120148RC | | | |
| 1.49 | 0.0587 | | 6120149R | 6120149RC | | | |
| 1.50 | 0.0591 | | 6120150R | 6120150RC | | | |
| 1.51 | 0.0594 | 53 | 6120151R | 6120151RC | | | |
| 1.52 | 0.0598 | | 6120152R | 6120152RC | | | |
| 1.53 | 0.0602 | | 6120153R | 6120153RC | | | |
| 1.54 | 0.0606 | | 6120154R | 6120154RC | | | |
| 1.55 | 0.0610 | | 6120155R | 6120155RC | | | |
| 1.56 | 0.0614 | | 6120156R | 6120156RC | | | |
| 1.57 | 0.0618 | | 6120157R | 6120157RC | | | |
| 1.58 | 0.0622 | | 6120158R | 6120158RC | | | |
| 1.59 | 0.0626 | 1/16 | 6120159R | 6120159RC | | | |
| 1.60 | 0.0630 | | 6120160R | 6120160RC | | | |
| 1.61 | 0.0634 | 52 | 6120161R | 6120161RC | | | |
| 1.62 | 0.0638 | | 6120162R | 6120162RC | | | |
| 1.63 | 0.0642 | | 6120163R | 6120163RC | | | |
| 1.64 | 0.0646 | | 6120164R | 6120164RC | | | |
| 1.65 | 0.0650 | | 6120165R | 6120165RC | | | |

Series 6120 Continued

6120 Series Solid Carbide

4-5 x D – Depth of Cut 120°, continued



Non-stock: allow 4 weeks for delivery

6120 Series Solid Carbide - Drill Sizes 1.66 – 2.59mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 1.66 | 0.0654 | | 2.0 | 7.2 | 38.0 | 6120166R | 6120166RC |
| 1.67 | 0.0657 | | | | | 6120167R | 6120167RC |
| 1.68 | 0.0661 | | | | | 6120168R | 6120168RC |
| 1.69 | 0.0665 | | | | | 6120169R | 6120169RC |
| 1.70 | 0.0669 | 51 | | | | 6120170R | 6120170RC |
| 1.71 | 0.0673 | | | | | 6120171R | 6120171RC |
| 1.72 | 0.0677 | | | | | 6120172R | 6120172RC |
| 1.73 | 0.0681 | | | | | 6120173R | 6120173RC |
| 1.74 | 0.0685 | | | | | 6120174R | 6120174RC |
| 1.75 | 0.0689 | | | | | 6120175R | 6120175RC |
| 1.76 | 0.0693 | | | | | 6120176R | 6120176RC |
| 1.77 | 0.0697 | | | | | 6120177R | 6120177RC |
| 1.78 | 0.0701 | 50 | | | | 6120178R | 6120178RC |
| 1.79 | 0.0705 | | | | | 6120179R | 6120179RC |
| 1.80 | 0.0709 | | | | | 6120180R | 6120180RC |
| 1.81 | 0.0713 | | | | | 6120181R | 6120181RC |
| 1.82 | 0.0717 | | | | | 6120182R | 6120182RC |
| 1.83 | 0.0720 | | 6120183R | 6120183RC | | | |
| 1.84 | 0.0724 | | 6120184R | 6120184RC | | | |
| 1.85 | 0.0728 | 49 | 6120185R | 6120185RC | | | |
| 1.86 | 0.0732 | | 6120186R | 6120186RC | | | |
| 1.87 | 0.0736 | | 6120187R | 6120187RC | | | |
| 1.88 | 0.0740 | | 6120188R | 6120188RC | | | |
| 1.89 | 0.0744 | | 6120189R | 6120189RC | | | |
| 1.90 | 0.0748 | | 6120190R | 6120190RC | | | |
| 1.91 | 0.0752 | | 6120191R | 6120191RC | | | |
| 1.92 | 0.0756 | | 6120192R | 6120192RC | | | |
| 1.93 | 0.0760 | 48 | 6120193R | 6120193RC | | | |
| 1.94 | 0.0764 | | 6120194R | 6120194RC | | | |
| 1.95 | 0.0768 | | 6120195R | 6120195RC | | | |
| 1.96 | 0.0772 | | 6120196R | 6120196RC | | | |
| 1.97 | 0.0776 | | 6120197R | 6120197RC | | | |
| 1.98 | 0.0780 | 5/64 | 6120198R | 6120198RC | | | |
| 1.99 | 0.0783 | 47 | 6120199R | 6120199RC | | | |
| 2.00 | 0.0787 | | 3.0 | 12.0 | 6120200R | 6120200RC | |
| 2.01 | 0.0791 | | | | 6120201R | 6120201RC | |
| 2.02 | 0.0795 | | | | 6120202R | 6120202RC | |
| 2.03 | 0.0799 | | | | 6120203R | 6120203RC | |
| 2.04 | 0.0803 | | | | 6120204R | 6120204RC | |
| 2.05 | 0.0807 | | | | 6120205R | 6120205RC | |
| 2.06 | 0.0811 | 46 | | | 6120206R | 6120206RC | |
| 2.07 | 0.0815 | | | | 6120207R | 6120207RC | |
| 2.08 | 0.0819 | 45 | | | 6120208R | 6120208RC | |
| 2.09 | 0.0823 | | | | 6120209R | 6120209RC | |
| 2.10 | 0.0827 | | | | 6120210R | 6120210RC | |
| 2.11 | 0.0831 | | | | 6120211R | 6120211RC | |
| 2.12 | 0.0835 | | 6120212R | 6120212RC | | | |

6120 Series Solid Carbide - Drill Sizes 1.66 – 2.59mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 2.13 | 0.0839 | | 3.0 | 12.0 | 38.0 | 6120213R | 6120213RC |
| 2.14 | 0.0843 | | | | | 6120214R | 6120214RC |
| 2.15 | 0.0846 | | | | | 6120215R | 6120215RC |
| 2.16 | 0.0850 | | | | | 6120216R | 6120216RC |
| 2.17 | 0.0854 | | | | | 6120217R | 6120217RC |
| 2.18 | 0.0858 | 44 | | | | 6120218R | 6120218RC |
| 2.19 | 0.0862 | | | | | 6120219R | 6120219RC |
| 2.20 | 0.0866 | | | | | 6120220R | 6120220RC |
| 2.21 | 0.0870 | | | | | 6120221R | 6120221RC |
| 2.22 | 0.0874 | | | | | 6120222R | 6120222RC |
| 2.23 | 0.0878 | | | | | 6120223R | 6120223RC |
| 2.24 | 0.0882 | | | | | 6120224R | 6120224RC |
| 2.25 | 0.0886 | | | | | 6120225R | 6120225RC |
| 2.26 | 0.0890 | 43 | | | | 6120226R | 6120226RC |
| 2.27 | 0.0894 | | | | | 6120227R | 6120227RC |
| 2.28 | 0.0898 | | | | | 6120228R | 6120228RC |
| 2.29 | 0.0902 | | | | | 6120229R | 6120229RC |
| 2.30 | 0.0906 | | 6120230R | 6120230RC | | | |
| 2.31 | 0.0909 | | 6120231R | 6120231RC | | | |
| 2.32 | 0.0913 | | 6120232R | 6120232RC | | | |
| 2.33 | 0.0917 | | 6120233R | 6120233RC | | | |
| 2.34 | 0.0921 | | 6120234R | 6120234RC | | | |
| 2.35 | 0.0925 | | 6120235R | 6120235RC | | | |
| 2.36 | 0.0929 | | 6120236R | 6120236RC | | | |
| 2.37 | 0.0933 | | 6120237R | 6120237RC | | | |
| 2.38 | 0.0937 | 3/32 | 6120238R | 6120238RC | | | |
| 2.39 | 0.0941 | | 6120239R | 6120239RC | | | |
| 2.40 | 0.0945 | | 6120240R | 6120240RC | | | |
| 2.41 | 0.0949 | | 6120241R | 6120241RC | | | |
| 2.42 | 0.0953 | | 6120242R | 6120242RC | | | |
| 2.43 | 0.0957 | | 6120243R | 6120243RC | | | |
| 2.44 | 0.0961 | 41 | 6120244R | 6120244RC | | | |
| 2.45 | 0.0965 | | 6120245R | 6120245RC | | | |
| 2.46 | 0.0969 | | 6120246R | 6120246RC | | | |
| 2.47 | 0.0972 | | 6120247R | 6120247RC | | | |
| 2.48 | 0.0976 | | 6120248R | 6120248RC | | | |
| 2.49 | 0.0980 | 40 | 6120249R | 6120249RC | | | |
| 2.50 | 0.0984 | | 6120250R | 6120250RC | | | |
| 2.51 | 0.0988 | | 6120251R | 6120251RC | | | |
| 2.52 | 0.0992 | | 6120252R | 6120252RC | | | |
| 2.53 | 0.0996 | 39 | 6120253R | 6120253RC | | | |
| 2.54 | 0.1000 | | 6120254R | 6120254RC | | | |
| 2.55 | 0.1004 | | 6120255R | 6120255RC | | | |
| 2.56 | 0.1008 | | 6120256R | 6120256RC | | | |
| 2.57 | 0.1012 | | 6120257R | 6120257RC | | | |
| 2.58 | 0.1016 | 38 | 6120258R | 6120258RC | | | |
| 2.59 | 0.1020 | | 6120259R | 6120259RC | | | |

Series 6120 Continued

6120 Series Solid Carbide

4-5x D – Depth of Cut 120°, continued



 Non-stock: allow 4 weeks for delivery

6120 Series Solid Carbide - Drill Sizes 2.60 – 3.00mm

NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|----------------------------|--|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 2.60 | 0.1024 | | 3.0 | 14.0 | 38.0 | 6120260R | 6120260RC |
| 2.61 | 0.1028 | | | | | 6120261R | 6120261RC |
| 2.62 | 0.1031 | | | | | 6120262R | 6120262RC |
| 2.63 | 0.1035 | | | | | 6120263R | 6120263RC |
| 2.64 | 0.1039 | 37 | | | | 6120264R | 6120264RC |
| 2.65 | 0.1043 | | | | | 6120265R | 6120265RC |
| 2.66 | 0.1047 | | | | | 6120266R | 6120266RC |
| 2.67 | 0.1051 | | | | | 6120267R | 6120267RC |
| 2.68 | 0.1055 | | | | | 6120268R | 6120268RC |
| 2.69 | 0.1059 | | | | | 6120269R | 6120269RC |
| 2.70 | 0.1063 | 36 | | | | 6120270R | 6120270RC |
| 2.71 | 0.1067 | | | | | 6120271R | 6120271RC |
| 2.72 | 0.1071 | | | | | 6120272R | 6120272RC |
| 2.73 | 0.1075 | | | | | 6120273R | 6120273RC |
| 2.74 | 0.1079 | | | | | 6120274R | 6120274RC |
| 2.75 | 0.1083 | | | | | 6120275R | 6120275RC |
| 2.76 | 0.1087 | | | | | 6120276R | 6120276RC |
| 2.77 | 0.1091 | | | | | 6120277R | 6120277RC |
| 2.78 | 0.1094 | 7/64 | | | | 6120278R | 6120278RC |
| 2.79 | 0.1098 | 35 | | | | 6120279R | 6120279RC |
| 2.80 | 0.1102 | | 6120280R | 6120280RC | | | |

6120 Series Solid Carbide - Drill Sizes 2.60 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|----------------------------|--|----------------|----------------------------|-------------------------------|------------------------------------|-------------------------|------------------------------|
| 2.81 | 0.1106 | | 3.0 | 14.0 | 38.0 | 6120281R | 6120281RC |
| 2.82 | 0.1110 | 34 | | | | 6120282R | 6120282RC |
| 2.83 | 0.1114 | | | | | 6120283R | 6120283RC |
| 2.84 | 0.1118 | | | | | 6120284R | 6120284RC |
| 2.85 | 0.1122 | | | | | 6120285R | 6120285RC |
| 2.86 | 0.1126 | | | | | 6120286R | 6120286RC |
| 2.87 | 0.1130 | 33 | | | | 6120287R | 6120287RC |
| 2.88 | 0.1134 | | | | | 6120288R | 6120288RC |
| 2.89 | 0.1138 | | | | | 6120289R | 6120289RC |
| 2.90 | 0.1142 | | | | | 6120290R | 6120290RC |
| 2.91 | 0.1146 | | | | | 6120291R | 6120291RC |
| 2.92 | 0.1150 | | | | | 6120292R | 6120292RC |
| 2.93 | 0.1154 | | | | | 6120293R | 6120293RC |
| 2.94 | 0.1157 | | | | | 6120294R | 6120294RC |
| 2.95 | 0.1161 | 32 | | | | 6120295R | 6120295RC |
| 2.96 | 0.1165 | | | | | 6120296R | 6120296RC |
| 2.97 | 0.1169 | | | | | 6120297R | 6120297RC |
| 2.98 | 0.1173 | | | | | 6120298R | 6120298RC |
| 2.99 | 0.1177 | | | | | 6120299R | 6120299RC |
| 3.00 | 0.1181 | | | | | 6120300R | 6120300RC |

6100 Series Solid Carbide

5-7 x D – Depth of Cut 120°




+ 0.000/- 0.006mm (h6) Uncoated Version
 + 0.002/-0.004mm Coated Version

For medium to high tensile strength steel, stainless, titanium alloys and cast iron.

All items can be ordered as left hand at same pricing. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 24°, 30° or other
- Point angles of 90°, 110°, 130°, 140° or other
- Special diameters as 1.255mm or other
- Special tolerances as +/- 0.001mm or other
- Coolant thru drills at 3 and 4mm shanks
- **Special sizes up to 4mm**
- Minimum custom order is 10 Pieces / Spec.
- **Lead-time on custom orders—4 Weeks ARO**

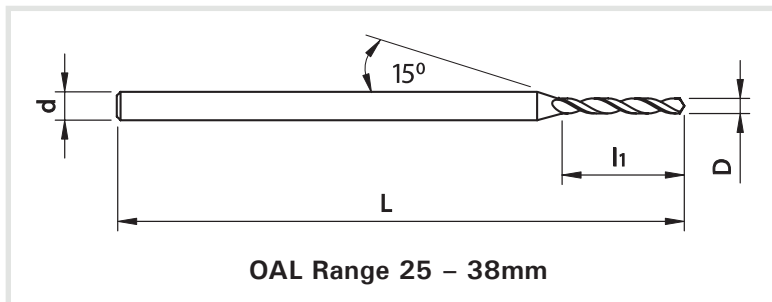

OAL Range 25 – 38mm

Non-stock: allow 4 weeks for delivery

6100 Series Solid Carbide - Drill Sizes 0.10 – 0.61mm
 NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|--------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.10 | 0.0039 | | 1.0 | 0.5 | 25.0 | 6100010R | - |
| 0.11 | 0.0043 | | | | | 6100011R | - |
| 0.12 | 0.0047 | | | | | 6100012R | - |
| 0.13 | 0.0051 | | | | | 6100013R | - |
| 0.14 | 0.0055 | | | | | 6100014R | - |
| 0.15 | 0.0059 | 97 | | 6100015R | | - | |
| 0.16 | 0.0063 | 96 | | 6100016R | | - | |
| 0.17 | 0.0067 | 95 | | 6100017R | | - | |
| 0.18 | 0.0071 | 94 | | 6100018R | | - | |
| 0.19 | 0.0075 | 93 | | 6100019R | | - | |
| 0.20 | 0.0079 | 92 | 6100020R | - | | | |
| 0.21 | 0.0083 | 91 | 1.8 | 6100021R | - | | |
| 0.22 | 0.0087 | 90 | | 6100022R | - | | |
| 0.23 | 0.0091 | 89 | | 6100023R | - | | |
| 0.24 | 0.0094 | 88 | | 6100024R | - | | |
| 0.25 | 0.0098 | | | 6100025R | - | | |
| 0.26 | 0.0102 | | 2.2 | 6100026R | - | | |
| 0.27 | 0.0106 | 86 | | 6100027R | - | | |
| 0.28 | 0.0110 | 85 | | 6100028R | - | | |
| 0.29 | 0.0114 | 84 | | 6100029R | - | | |
| 0.30 | 0.0118 | | | 6100030R | - | | |
| 0.31 | 0.0122 | | 2.8 | 6100031R | - | | |
| 0.32 | 0.0126 | 82 | | 6100032R | - | | |
| 0.33 | 0.0130 | 81 | | 6100033R | - | | |
| 0.34 | 0.0134 | 80 | | 6100034R | - | | |
| 0.35 | 0.0138 | | | 6100035R | - | | |

6100 Series Solid Carbide - Drill Sizes 0.10 – 0.61mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|--------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 0.36 | 0.0142 | | 1.0 | 2.8 | 25.0 | 6100036R | - |
| 0.37 | 0.0146 | 79 | | | | 6100037R | - |
| 0.38 | 0.0150 | | | | | 6100038R | - |
| 0.39 | 0.0154 | | | | | 6100039R | - |
| 0.40 | 0.0157 | | | | | 6100040R | - |
| 0.41 | 0.0161 | 78 | | 6100041R | | - | |
| 0.42 | 0.0165 | | | 6100042R | | - | |
| 0.43 | 0.0169 | | | 6100043R | | - | |
| 0.44 | 0.0173 | | | 6100044R | | - | |
| 0.45 | 0.0177 | | | 6100045R | | - | |
| 0.46 | 0.0181 | 77 | 6100046R | - | | | |
| 0.47 | 0.0185 | | 4.0 | 6100047R | - | | |
| 0.48 | 0.0189 | | | 6100048R | - | | |
| 0.49 | 0.0193 | | | 6100049R | - | | |
| 0.50 | 0.0197 | | | 6100050R | 6100050RC | | |
| 0.51 | 0.0201 | 76 | | 6100051R | 6100051RC | | |
| 0.52 | 0.0205 | | 4.5 | 6100052R | 6100052RC | | |
| 0.53 | 0.0209 | 75 | | 6100053R | 6100053RC | | |
| 0.54 | 0.0213 | | | 6100054R | 6100054RC | | |
| 0.55 | 0.0217 | | | 6100055R | 6100055RC | | |
| 0.56 | 0.0220 | | | 6100056R | 6100056RC | | |
| 0.57 | 0.0224 | 74 | 1.5 | 6100057R | 6100057RC | | |
| 0.58 | 0.0228 | | | 6100058R | 6100058RC | | |
| 0.59 | 0.0232 | | | 6100059R | 6100059RC | | |
| 0.60 | 0.0236 | | | 5.0 | 6100060R | 6100060RC | |
| 0.61 | 0.0240 | 73 | | | 6100061R | 6100061RC | |

Series 6100 Continued

*SPECIAL ORDERS: Series 6100 flute diameters coated sizes smaller than 0.50mm are special order. Please contact Pilot Precision Products for details.

6100 Series Solid Carbide

5-7 x D – Depth of Cut 120°, continued



Non-stock: allow 4 weeks for delivery

| 6100 Series Solid Carbide - Drill Sizes 0.62 – 1.53mm | | | | | | | |
|---|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| <i>NOTE: Sold in 10 piece packages only</i> | | | | | | | |
| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
| 0.62 | 0.0244 | | 1.5 | 5.0 | 30.0 | 6100062R | 6100062RC |
| 0.63 | 0.0248 | 72 | | | | 6100063R | 6100063RC |
| 0.64 | 0.0252 | | | | | 6100064R | 6100064RC |
| 0.65 | 0.0256 | | | | | 6100065R | 6100065RC |
| 0.66 | 0.0260 | 71 | | | | 6100066R | 6100066RC |
| 0.67 | 0.0264 | | | 6100067R | | 6100067RC | |
| 0.68 | 0.0268 | | | 6100068R | | 6100068RC | |
| 0.69 | 0.0272 | | | 6100069R | | 6100069RC | |
| 0.70 | 0.0276 | | | 6100070R | | 6100070RC | |
| 0.71 | 0.0280 | 70 | | 6100071R | | 6100071RC | |
| 0.72 | 0.0283 | | 5.6 | 30.0 | 6100072R | 6100072RC | |
| 0.73 | 0.0287 | | | | 6100073R | 6100073RC | |
| 0.74 | 0.0291 | 69 | | | 6100074R | 6100074RC | |
| 0.75 | 0.0295 | | | | 6100075R | 6100075RC | |
| 0.76 | 0.0299 | | | | 6100076R | 6100076RC | |
| 0.77 | 0.0303 | | 6100077R | | 6100077RC | | |
| 0.78 | 0.0307 | | 6100078R | | 6100078RC | | |
| 0.79 | 0.0311 | 68-1/32 | 6.3 | | 30.0 | 6100079R | 6100079RC |
| 0.80 | 0.0315 | | | | | 6100080R | 6100080RC |
| 0.81 | 0.0319 | 67 | | | | 6100081R | 6100081RC |
| 0.82 | 0.0323 | | | 6100082R | | 6100082RC | |
| 0.83 | 0.0327 | | | 6100083R | | 6100083RC | |
| 0.84 | 0.0331 | 66 | 6100084R | 6100084RC | | | |
| 0.85 | 0.0335 | | 6100085R | 6100085RC | | | |
| 0.86 | 0.0339 | | 6100086R | 6100086RC | | | |
| 0.87 | 0.0343 | | 6100087R | 6100087RC | | | |
| 0.88 | 0.0346 | | 6100088R | 6100088RC | | | |
| 0.89 | 0.0350 | 65 | 6100089R | 6100089RC | | | |
| 0.90 | 0.0354 | | 7.1 | 30.0 | 6100090R | 6100090RC | |
| 0.91 | 0.0358 | 64 | | | 6100091R | 6100091RC | |
| 0.92 | 0.0362 | | | | 6100092R | 6100092RC | |
| 0.93 | 0.0366 | | | | 6100093R | 6100093RC | |
| 0.94 | 0.0370 | 63 | | | 6100094R | 6100094RC | |
| 0.95 | 0.0374 | | 6100095R | | 6100095RC | | |
| 0.96 | 0.0378 | 62 | 6100096R | | 6100096RC | | |
| 0.97 | 0.0382 | | 6100097R | | 6100097RC | | |
| 0.98 | 0.0386 | | 6100098R | | 6100098RC | | |
| 0.99 | 0.0390 | 61 | 6100099R | | 6100099RC | | |
| 1.00 | 0.0394 | | 8.0 | 30.0 | 6100100R | 6100100RC | |
| 1.01 | 0.0398 | 60 | | | 6100101R | 6100101RC | |
| 1.02 | 0.0402 | | | | 6100102R | 6100102RC | |
| 1.03 | 0.0406 | | | | 6100103R | 6100103RC | |
| 1.04 | 0.0409 | 59 | | | 6100104R | 6100104RC | |
| 1.05 | 0.0413 | | 6100105R | | 6100105RC | | |
| 1.06 | 0.0417 | | 9.0 | | 30.0 | 6100106R | 6100106RC |
| 1.07 | 0.0421 | 58 | | | | 6100107R | 6100107RC |

| 6100 Series Solid Carbide - Drill Sizes 0.62 – 1.53mm | | | | | | | | |
|---|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|-----------|
| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. | |
| 1.08 | 0.0425 | | 1.5 | 9.0 | 30.0 | 6100108R | 6100108RC | |
| 1.09 | 0.0429 | 57 | | | | 6100109R | 6100109RC | |
| 1.10 | 0.0433 | | | | | 6100110R | 6100110RC | |
| 1.11 | 0.0437 | | | | | 6100111R | 6100111RC | |
| 1.12 | 0.0441 | | | | | 6100112R | 6100112RC | |
| 1.13 | 0.0445 | | | 6100113R | | 6100113RC | | |
| 1.14 | 0.0449 | | | 6100114R | | 6100114RC | | |
| 1.15 | 0.0453 | | | 6100115R | | 6100115RC | | |
| 1.16 | 0.0457 | | | 10.0 | | 30.0 | 6100116R | 6100116RC |
| 1.17 | 0.0461 | | | | | | 6100117R | 6100117RC |
| 1.18 | 0.0465 | 56 | 6100118R | | 6100118RC | | | |
| 1.19 | 0.0469 | 3/64 | 6100119R | | 6100119RC | | | |
| 1.20 | 0.0472 | | 6100120R | | 6100120RC | | | |
| 1.21 | 0.0476 | | 6100121R | 6100121RC | | | | |
| 1.22 | 0.0480 | | 6100122R | 6100122RC | | | | |
| 1.23 | 0.0484 | | 6100123R | 6100123RC | | | | |
| 1.24 | 0.0488 | | 6100124R | 6100124RC | | | | |
| 1.25 | 0.0492 | | 11.2 | 30.0 | 6100125R | | 6100125RC | |
| 1.26 | 0.0496 | | | | 6100126R | 6100126RC | | |
| 1.27 | 0.0500 | | | | 6100127R | 6100127RC | | |
| 1.28 | 0.0504 | | | | 6100128R | 6100128RC | | |
| 1.29 | 0.0508 | | | | 6100129R | 6100129RC | | |
| 1.30 | 0.0512 | | 11.2 | | 30.0 | 6100130R | 6100130RC | |
| 1.31 | 0.0516 | | | | | 6100131R | 6100131RC | |
| 1.32 | 0.0520 | 55 | | | | 6100132R | 6100132RC | |
| 1.33 | 0.0524 | | | | | 6100133R | 6100133RC | |
| 1.34 | 0.0528 | | | | | 6100134R | 6100134RC | |
| 1.35 | 0.0531 | | 6100135R | 6100135RC | | | | |
| 1.36 | 0.0535 | | 11.2 | 30.0 | | 6100136R | 6100136RC | |
| 1.37 | 0.0539 | | | | | 6100137R | 6100137RC | |
| 1.38 | 0.0543 | | | | | 6100138R | 6100138RC | |
| 1.39 | 0.0547 | | | | | 6100139R | 6100139RC | |
| 1.40 | 0.0551 | 54 | | | 6100140R | 6100140RC | | |
| 1.41 | 0.0555 | | 6100141R | | 6100141RC | | | |
| 1.42 | 0.0559 | | 6100142R | | 6100142RC | | | |
| 1.43 | 0.0563 | | 6100143R | | 6100143RC | | | |
| 1.44 | 0.0567 | | 6100144R | | 6100144RC | | | |
| 1.45 | 0.0571 | | 11.2 | | 30.0 | 6100145R | 6100145RC | |
| 1.46 | 0.0575 | | | 6100146R | | 6100146RC | | |
| 1.47 | 0.0579 | | | 6100147R | | 6100147RC | | |
| 1.48 | 0.0583 | | | 6100148R | | 6100148RC | | |
| 1.49 | 0.0587 | | | 6100149R | | 6100149RC | | |
| 1.50 | 0.0591 | | 2.0 | 38.0 | | 6100150R | 6100150RC | |
| 1.51 | 0.0594 | 53 | | | | 6100151R | 6100151RC | |
| 1.52 | 0.0598 | | | | | 6100152R | 6100152RC | |
| 1.53 | 0.0602 | | | | | 6100153R | 6100153RC | |

Series 6100 Continued

6100 Series Solid Carbide

5-7 x D – Depth of Cut 120°, continued



Non-stock: allow 4 weeks for delivery

6100 Series Solid Carbide - Drill Sizes 1.54 – 1.99mm
NOTE: Sold in 10 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 1.54 | 0.0606 | | 2.0 | 12.0 | 38.0 | 6100154R | 6100154RC |
| 1.55 | 0.0610 | | | | | 6100155R | 6100155RC |
| 1.56 | 0.0614 | | | | | 6100156R | 6100156RC |
| 1.57 | 0.0618 | | | | | 6100157R | 6100157RC |
| 1.58 | 0.0622 | | | | | 6100158R | 6100158RC |
| 1.59 | 0.0626 | 1/16 | | | | 6100159R | 6100159RC |
| 1.60 | 0.0630 | | | | | 6100160R | 6100160RC |
| 1.61 | 0.0634 | 52 | | | | 6100161R | 6100161RC |
| 1.62 | 0.0638 | | | | | 6100162R | 6100162RC |
| 1.63 | 0.0642 | | | | | 6100163R | 6100163RC |
| 1.64 | 0.0646 | | | | | 6100164R | 6100164RC |
| 1.65 | 0.0650 | | | | | 6100165R | 6100165RC |
| 1.66 | 0.0654 | | | | | 6100166R | 6100166RC |
| 1.67 | 0.0657 | | | | | 6100167R | 6100167RC |
| 1.68 | 0.0661 | | | | | 6100168R | 6100168RC |
| 1.69 | 0.0665 | | | | | 6100169R | 6100169RC |
| 1.70 | 0.0669 | 51 | | | | 6100170R | 6100170RC |
| 1.71 | 0.0673 | | | | | 6100171R | 6100171RC |
| 1.72 | 0.0677 | | | | | 6100172R | 6100172RC |
| 1.73 | 0.0681 | | | | | 6100173R | 6100173RC |
| 1.74 | 0.0685 | | 6100174R | 6100174RC | | | |
| 1.75 | 0.0689 | | 6100175R | 6100175RC | | | |
| 1.76 | 0.0693 | | 6100176R | 6100176RC | | | |

6100 Series Solid Carbide - Drill Sizes 1.54 – 1.99mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|----------------------|---------------------------|
| 1.77 | 0.0697 | | 2.0 | 12.0 | 38.0 | 6100177R | 6100177RC |
| 1.78 | 0.0701 | 50 | | | | 6100178R | 6100178RC |
| 1.79 | 0.0705 | | | | | 6100179R | 6100179RC |
| 1.80 | 0.0709 | | | | | 6100180R | 6100180RC |
| 1.81 | 0.0713 | | | | | 6100181R | 6100181RC |
| 1.82 | 0.0717 | | | | | 6100182R | 6100182RC |
| 1.83 | 0.0720 | | | | | 6100183R | 6100183RC |
| 1.84 | 0.0724 | | | | | 6100184R | 6100184RC |
| 1.85 | 0.0728 | 49 | | | | 6100185R | 6100185RC |
| 1.86 | 0.0732 | | | | | 6100186R | 6100186RC |
| 1.87 | 0.0736 | | | | | 6100187R | 6100187RC |
| 1.88 | 0.0740 | | | | | 6100188R | 6100188RC |
| 1.89 | 0.0744 | | | | | 6100189R | 6100189RC |
| 1.90 | 0.0748 | | | | | 6100190R | 6100190RC |
| 1.91 | 0.0752 | | | | | 6100191R | 6100191RC |
| 1.92 | 0.0756 | | | | | 6100192R | 6100192RC |
| 1.93 | 0.0760 | 48 | | | | 6100193R | 6100193RC |
| 1.94 | 0.0764 | | | | | 6100194R | 6100194RC |
| 1.95 | 0.0768 | | | | | 6100195R | 6100195RC |
| 1.96 | 0.0772 | | | | | 6100196R | 6100196RC |
| 1.97 | 0.0776 | | 6100197R | 6100197RC | | | |
| 1.98 | 0.0780 | 5/64 | 6100198R | 6100198RC | | | |
| 1.99 | 0.0783 | 47 | 6100199R | 6100199RC | | | |

NOTE: For drill sizes 2.00mm and larger See our 6120 and 6200 Series

6100 Series Solid Carbide

- **For medium to high tensile strength Steel, Stainless, Titanium Alloys and Cast Iron**
- **Amazing dimension control at h6, h4 & h3 μm tolerances**
- **Ultra-fine surface finish for smooth operation**
- **Micro Grain Carbide with 10% Cobalt Content for outstanding performance & long tool life**
- **Coatings available upon request**

1100 Series Solid Carbide Half Round Gun Drills | 10 x D – Depth of Cut 120°



+ 0.000/- 0.005mm (h5)

Direct drilling, no centering required, good chip evacuation, high performance in brass connectors.

For soft materials, brass, copper, gold, silver and stainless, titanium alloys.


Single lip half round for outstanding coolant flow and fine surface finishes.

All items can be ordered as left hand cut at same pricing.

Special, custom specification items available.

Custom specifications such as:

- Size range from 0.5mm to 2.00mm in increments of 0.05mm
- Intermediate sizes upon request
- Special sizes, point angles and tolerances available
- Minimum custom order is 10 Pieces
- **Lead-time on customs 4 weeks ARO**
6 weeks with coating

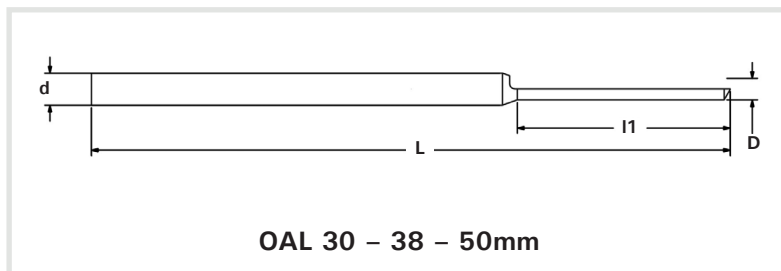

1100 Series Solid Carbide Half Round Gun Drills- Drill Sizes 0.20 – 3.00mm *NOTE: Sold in 10 piece packages only*

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|-------------------------|-------------------------|---------------------------------|-------------------------|
| 0.20 | 0.0079 | | 1.50 | 2.00 | 30.0 | 1100020R |
| 0.25 | 0.0098 | | | 2.50 | | 1100025R |
| 0.30 | 0.0118 | | | 3.00 | | 1100030R |
| 0.35 | 0.0138 | | | 3.50 | | 1100035R |
| 0.40 | 0.0157 | | | 4.00 | | 1100040R |
| 0.45 | 0.0177 | | | 4.50 | | 1100045R |
| 0.50 | 0.0197 | | | 5.00 | | 1100050R |
| 0.55 | 0.0217 | | | 5.50 | | 1100055R |
| 0.60 | 0.0236 | | | 6.00 | | 1100060R |
| 0.65 | 0.0256 | | | 6.50 | | 1100065R |
| 0.70 | 0.0276 | | | 7.00 | | 1100070R |
| 0.75 | 0.0295 | | | 7.50 | | 1100075R |
| 0.80 | 0.0315 | | | 8.00 | | 1100080R |
| 0.85 | 0.0335 | | | 8.50 | | 1100085R |
| 0.90 | 0.0354 | | | 9.00 | | 1100090R |
| 0.95 | 0.0374 | | | 9.50 | | 1100095R |
| 1.00 | 0.0394 | | | 10.00 | | 1100100R |
| 1.05 | 0.0413 | | 11.50 | 1100105R | | |
| 1.10 | 0.0433 | | 11.00 | 1100110R | | |
| 1.15 | 0.0453 | | 11.50 | 1100115R | | |
| 1.20 | 0.0472 | | 12.00 | 1100120R | | |
| 1.25 | 0.0492 | | 12.50 | 1100125R | | |
| 1.30 | 0.0512 | | 13.00 | 1100130R | | |
| 1.35 | 0.0531 | | 13.50 | 1100135R | | |

1100 Series Solid Carbide Half Round Gun Drills- Drill Sizes 0.20 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. |
|-------------------------|--|----------------|-------------------------|-------------------------|---------------------------------|-------------------------|
| 1.40 | 0.0551 | 54 | 1.5 | 14.00 | 30.0 | 1100140R |
| 1.45 | 0.0571 | | | 14.50 | | 1100145R |
| 1.50 | 0.0591 | | | 15.00 | | 1100150R |
| 1.55 | 0.0610 | | | 15.50 | | 1100155R |
| 1.60 | 0.0630 | | | 16.00 | | 1100160R |
| 1.65 | 0.0650 | | | 16.50 | | 1100165R |
| 1.70 | 0.0669 | 51 | | 2.0 | | 17.00 |
| 1.75 | 0.0689 | | 17.50 | | 1100175R | |
| 1.80 | 0.0709 | | 18.00 | | 1100180R | |
| 1.85 | 0.0728 | 49 | 18.50 | | 1100185R | |
| 1.90 | 0.0748 | | 19.00 | | 1100190R | |
| 1.95 | 0.0768 | | 19.50 | | 1100195R | |
| 2.00 | 0.0787 | | 20.00 | | 1100200R | |
| 2.10 | 0.0827 | | 3.0 | 21.00 | 50.0 | 1100210R |
| 2.20 | 0.0866 | | | 22.00 | | 1100220R |
| 2.30 | 0.0906 | | | 23.00 | | 1100230R |
| 2.40 | 0.0945 | | | 24.00 | | 1100240R |
| 2.50 | 0.0984 | | | 25.00 | | 1100250R |
| 2.60 | 0.1024 | | | 26.00 | | 1100260R |
| 2.70 | 0.1063 | 36 | | 27.00 | | 1100270R |
| 2.80 | 0.1102 | | | 28.00 | | 1100280R |
| 2.90 | 0.1142 | | | 29.00 | | 1100290R |
| 3.00 | 0.1181 | | | 30.00 | | 1100300R |

6200 HP Series Solid Carbide

6-7 x D – Depth of Cut 140°



h4 Tolerance Reinforced Shank d 3.0mm

10% COBALT
MICRO
GRAIN
CARBIDE

RH

140°
Point

30°
Helix

2
FLUTES

HARDNESS
1570=
HV30


h4

+ 0.000/- 0.004mm (h4) Uncoated Version
+ 0.002/-0.002mm Coated Version

High performance drill with a wide range of applications: steels, cast iron, and non-ferrous metals. Spot/center drill recommended for better hole straightness - with 6140 series. High performance with outstanding surface finishes with strong core - no deviation. All items can be quoted as left hand cut - contact us. Special, custom specification items available.

Custom specifications such as:

- Helix angle of 15°, 24°, 35° or other
- Point angles of 90°, 110°, 120°, 130° or other
- Special diameters as 0.92mm or other
- Special tolerances as +/- 0.001mm or other
- Minimum custom order is 10 Pieces
- **Lead-time on custom orders—4 Weeks ARO**

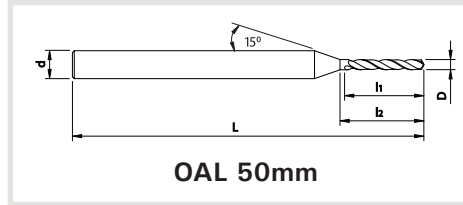

6200 HP Series Solid Carbide - Drill Sizes 0.50 – 4.00mm
NOTE: Sold in 5 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | I2 D Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|----------------------------|--|----------------|----------------------------|-------------------------------|---------------------------|------------------------------------|-------------------------|------------------------------|
| 0.50 | 0.0197 | | 3.0 | 3.5 | 4.4 | 50.0 | 6200050R | 6200050RC |
| 0.55 | 0.0217 | | | 4.0 | 5.0 | | 6200055R | 6200055RC |
| 0.60 | 0.0236 | | | 4.5 | 5.6 | | 6200060R | 6200060RC |
| 0.65 | 0.0256 | | | 5.0 | 6.3 | | 6200065R | 6200065RC |
| 0.70 | 0.0276 | | | 5.5 | 6.9 | | 6200070R | 6200070RC |
| 0.75 | 0.0295 | | | 5.6 | 7.2 | | 6200075R | 6200075RC |
| 0.80 | 0.0315 | | | 6.0 | 7.6 | | 6200080R | 6200080RC |
| 0.85 | 0.0335 | | | 6.5 | 8.1 | | 6200085R | 6200085RC |
| 0.90 | 0.0354 | | | 6.7 | 8.5 | | 6200090R | 6200090RC |
| 0.95 | 0.0374 | | | 7.0 | 8.8 | | 6200095R | 6200095RC |
| 1.00 | 0.0394 | | | 7.5 | 9.4 | | 6200100R | 6200100RC |
| 1.05 | 0.0413 | | | 8.0 | 1.1 | | 6200105R | 6200105RC |
| 1.10 | 0.0433 | | | 8.1 | 1.4 | | 6200110R | 6200110RC |
| 1.15 | 0.0453 | | | 8.5 | 11.0 | | 6200115R | 6200115RC |
| 1.20 | 0.0472 | | | 8.9 | 11.3 | | 6200120R | 6200120RC |
| 1.25 | 0.0492 | | | 9.2 | 11.7 | | 6200125R | 6200125RC |
| 1.30 | 0.0512 | | | 9.6 | 12.2 | | 6200130R | 6200130RC |
| 1.35 | 0.0531 | | 10.0 | 12.5 | 6200135R | 6200135RC | | |
| 1.40 | 0.0551 | 54 | 10.0 | 12.5 | 6200140R | 6200140RC | | |
| 1.45 | 0.0571 | | 11.5 | 13.0 | 6200145R | 6200145RC | | |
| 1.50 | 0.0591 | | 11.0 | 13.5 | 6200150R | 6200150RC | | |
| 1.55 | 0.0610 | | 11.5 | 14.0 | 6200155R | 6200155RC | | |
| 1.60 | 0.0630 | | 12.0 | 15.0 | 6200160R | 6200160RC | | |
| 1.65 | 0.0650 | | 12.0 | 15.0 | 6200165R | 6200165RC | | |
| 1.70 | 0.0669 | 51 | 12.0 | 15.0 | 6200170R | 6200170RC | | |
| 1.75 | 0.0689 | | 12.5 | 15.5 | 6200175R | 6200175RC | | |

6200 HP Series Solid Carbide - Drill Sizes 0.50 – 4.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | I1 Flute Length (mm) | I2 D Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|----------------------------|--|----------------|----------------------------|-------------------------------|---------------------------|------------------------------------|-------------------------|------------------------------|
| 1.80 | 0.0709 | | 3.0 | 13.0 | 16.0 | 50.0 | 6200180R | 6200180RC |
| 1.85 | 0.0728 | 49 | | 13.5 | 17.5 | | 6200185R | 6200185RC |
| 1.90 | 0.0748 | | | 14.0 | 18.0 | | 6200190R | 6200190RC |
| 1.95 | 0.0768 | | | 14.5 | 18.5 | | 6200195R | 6200195RC |
| 2.00 | 0.0787 | | | 15.0 | 19.0 | | 6200200R | 6200200RC |
| 2.05 | 0.0807 | | | 15.0 | 19.0 | | 6200205R | 6200205RC |
| 2.10 | 0.0827 | | | 15.0 | 19.0 | | 6200210R | 6200210RC |
| 2.15 | 0.0846 | | | 15.0 | 19.0 | | 6200215R | 6200215RC |
| 2.20 | 0.0866 | | | 16.0 | 20.0 | | 6200220R | 6200220RC |
| 2.25 | 0.0886 | | | 16.0 | 20.0 | | 6200225R | 6200225RC |
| 2.30 | 0.0906 | | | 16.5 | 21.0 | | 6200230R | 6200230RC |
| 2.35 | 0.0925 | | | 16.5 | 21.0 | | 6200235R | 6200235RC |
| 2.40 | 0.0945 | | | 17.0 | 22.0 | | 6200240R | 6200240RC |
| 2.45 | 0.0965 | | | 17.5 | 22.5 | | 6200245R | 6200245RC |
| 2.50 | 0.0984 | | | 18.0 | 23.0 | | 6200250R | 6200250RC |
| 2.55 | 0.1004 | | | 18.0 | 23.0 | | 6200255R | 6200255RC |
| 2.60 | 0.1024 | | | 18.5 | 23.5 | | 6200260R | 6200260RC |
| 2.65 | 0.1043 | | 18.5 | 23.5 | 6200265R | 6200265RC | | |
| 2.70 | 0.1063 | 36 | 19.0 | 24.0 | 6200270R | 6200270RC | | |
| 2.75 | 0.1083 | | 19.0 | 24.0 | 6200275R | 6200275RC | | |
| 2.80 | 0.1102 | | 20.0 | 25.0 | 6200280R | 6200280RC | | |
| 2.85 | 0.1122 | | 20.0 | 25.0 | 6200285R | 6200285RC | | |
| 2.90 | 0.1142 | | 21.0 | 26.0 | 6200290R | 6200290RC | | |
| 2.95 | 0.1161 | 32 | 21.0 | 26.0 | 6200295R | 6200295RC | | |
| 3.00 | 0.1181 | | 21.5 | 26.0 | 6200300R | 6200300RC | | |
| 3.10 | 0.1220 | | 22.0 | 27.0 | 6200310R | 6200310RC | | |
| 3.20 | 0.1260 | | 22.0 | 27.0 | 6200320R | 6200320RC | | |
| 3.30 | 0.1299 | | 23.0 | 27.5 | 6200330R | 6200330RC | | |
| 3.40 | 0.1339 | | 23.8 | 28.5 | 6200340R | 6200340RC | | |
| 3.50 | 0.1378 | | 24.5 | 29.5 | 6200350R | 6200350RC | | |
| 3.60 | 0.1417 | | 25.2 | 30.0 | 6200360R | 6200360RC | | |
| 3.70 | 0.1457 | | 26.0 | 31.0 | 6200370R | 6200370RC | | |
| 3.80 | 0.1496 | | 26.5 | 32.0 | 6200380R | 6200380RC | | |
| 3.90 | 0.1535 | | 27.3 | 33.0 | 6200390R | 6200390RC | | |
| 4.00 | 0.1575 | | 28.0 | 33.5 | 6200400R | 6200400RC | | |

New for 2022

6220 HP Series Solid Carbide

12 x D – Depth of Cut 140°



h5 Tolerance Reinforced Shank d 3.0mm




+ 0.000/- 0.005mm (h5) Uncoated Version
 + 0.002/-0.003mm Coated Version

High performance drill with reinforced shank at 3.00mm.
Spot/center drill recommended for better hole straightness - with 6140 series.
For soft, medium and tensile strength steels, stainless, titanium, alloys and cast iron.
High performance with outstanding surface finishes with strong core - no deviation.
All items can be quoted as left hand cut - contact us.

Custom specifications such as:

- Size range from 0.20mm to 3.00mm in increments of 0.05mm
- Intermediate sizes upon request
- Special sizes and tolerances available
- **Special sizes up to 4mm**
- Minimum custom order is 10 Pieces
- **Lead-time on custom orders—4 Weeks ARO**

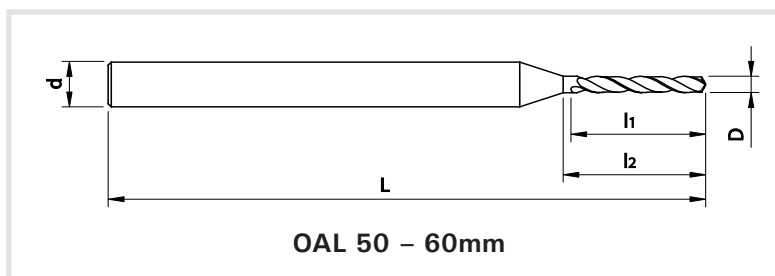

6220 HP Series Solid Carbide - Drill Sizes 0.50 – 3.00mm

NOTE: Sold in 5 piece packages only

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | l2 D Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|------------------|---------------------------|----------------------|---------------------------|
| 0.50 | 0.0197 | | 3.0 | 6.0 | 7.2 | 50.0 | 6220050R | 6220050RC |
| 0.55 | 0.0217 | | | 6.6 | 7.9 | | 6220055R | 6220055RC |
| 0.60 | 0.0236 | | | 7.2 | 8.6 | | 6220060R | 6220060RC |
| 0.65 | 0.0256 | | | 7.8 | 9.4 | | 6220065R | 6220065RC |
| 0.70 | 0.0276 | | | 8.4 | 1.1 | | 6220070R | 6220070RC |
| 0.75 | 0.0295 | | | 9.0 | 1.8 | | 6220075R | 6220075RC |
| 0.80 | 0.0315 | | | 9.6 | 11.5 | | 6220080R | 6220080RC |
| 0.85 | 0.0335 | | | 1.2 | 12.2 | | 6220085R | 6220085RC |
| 0.90 | 0.0354 | | | 1.8 | 13.0 | | 6220090R | 6220090RC |
| 0.95 | 0.0374 | | | 11.4 | 13.7 | | 6220095R | 6220095RC |
| 1.00 | 0.0394 | | | 12.0 | 14.4 | | 6220100R | 6220100RC |
| 1.05 | 0.0413 | | | 12.6 | 15.1 | | 6220105R | 6220105RC |
| 1.10 | 0.0433 | | | 13.2 | 15.8 | | 6220110R | 6220110RC |
| 1.15 | 0.0453 | | | 13.8 | 16.6 | | 6220115R | 6220115RC |
| 1.20 | 0.0472 | | | 14.4 | 17.3 | | 6220120R | 6220120RC |
| 1.25 | 0.0492 | | | 15.0 | 18.0 | | 6220125R | 6220125RC |

New for 2022

6220 HP Series Solid Carbide - Drill Sizes 0.50 – 3.00mm

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | l2 D Length (mm) | L Overall Length OAL (mm) | Uncoated (R) EDP No. | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|------------------|---------------------------|----------------------|---------------------------|
| 1.30 | 0.0512 | | 3.0 | 15.6 | 18.7 | 50.0 | 6220130R | 6220130RC |
| 1.35 | 0.0531 | | | 16.2 | 19.4 | | 6220135R | 6220135RC |
| 1.40 | 0.0551 | 54 | | 16.8 | 20.2 | | 6220140R | 6220140RC |
| 1.45 | 0.0571 | | | 17.4 | 20.9 | | 6220145R | 6220145RC |
| 1.50 | 0.0591 | | | 18.0 | 21.6 | | 6220150R | 6220150RC |
| 1.55 | 0.0610 | | | 18.6 | 22.3 | | 6220155R | 6220155RC |
| 1.60 | 0.0630 | | | 19.2 | 23.0 | 6220160R | 6220160RC | |
| 1.65 | 0.0650 | | | 19.8 | 23.8 | 6220165R | 6220165RC | |
| 1.70 | 0.0669 | 51 | | 24.0 | 24.5 | 6220170R | 6220170RC | |
| 1.75 | 0.0689 | | | 21.0 | 25.2 | 6220175R | 6220175RC | |
| 1.80 | 0.0709 | | | 21.6 | 25.9 | 6220180R | 6220180RC | |
| 1.85 | 0.0728 | 49 | | 22.2 | 26.6 | 6220185R | 6220185RC | |
| 1.90 | 0.0748 | | | 22.8 | 27.4 | 6220190R | 6220190RC | |
| 1.95 | 0.0768 | | | 23.4 | 28.1 | 6220195R | 6220195RC | |
| 2.00 | 0.0787 | | | 24.0 | 28.8 | 6220200R | 6220200RC | |
| 2.10 | 0.0827 | | | 25.2 | 30.2 | 6220210R | 6220210RC | |
| 2.20 | 0.0866 | | 26.4 | 31.7 | 6220220R | 6220220RC | | |
| 2.30 | 0.0906 | | 27.6 | 33.1 | 6220230R | 6220230RC | | |
| 2.40 | 0.0945 | | 28.8 | 34.6 | 6220240R | 6220240RC | | |
| 2.50 | 0.0984 | | 30 | 36.0 | 6220250R | 6220250RC | | |
| 2.60 | 0.1024 | | 31.2 | 37.4 | 6220260R | 6220260RC | | |
| 2.70 | 0.1063 | | 32.4 | 38.9 | 6220270R | 6220270RC | | |
| 2.80 | 0.1102 | | 33.6 | 40.3 | 6220280R | 6220280RC | | |
| 2.90 | 0.1142 | | 34.8 | 41.8 | 6220290R | 6220290RC | | |
| 3.00 | 0.1181 | | 36.0 | 43.2 | 6220300R | 6220300RC | | |

6230 CT Series Coolant-Thru

15 x D – Depth of Cut 140°



10% COBALT
MICRO
GRAIN
CARBIDE

RH

140°
Point

30°
Helix

2
FLUTES

HARDNESS
1570=
HV30

h5


h5 Tolerance
2-Flutes Drill with
2 Helicoidal Internal Holes

- + 0.000/- 0.005mm (h5) Uncoated Version
- + 0.002/-0.0003mm Coated Version

High performance-coolant-thru micro drills with a strong web for maximum alignment and accuracy. Coolant-thru to optimize lubrication, chip removal and cooling. Ideal for a wide range of applications, medium and high tensile strength steels, stainless steel, titanium-alloys, cast iron. Standard sizes in 0.05mm increments, but intermediate sizes upon request.

Custom specifications such as:

- Point angles of 90°, 110°, 120°, 130° or other
- Special diameters as 2.03 mm or other
- Special tolerances as +/- 0.001 mm or other
- Minimum special order is 10 Pieces
- **Lead-time on customs 4 weeks ARO**
6 weeks with coating
- **Specials available up to 6mm diameter**

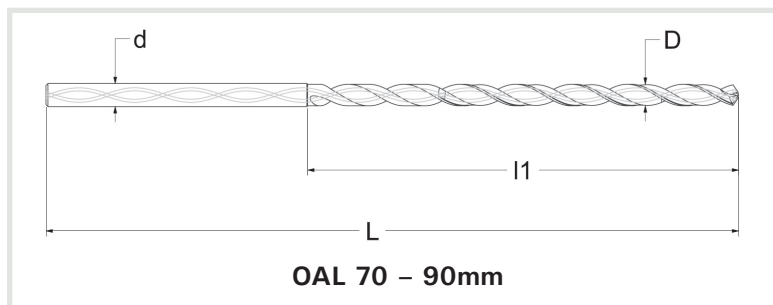

6230 CT Series Coolant-Thru - Drill Sizes 2.05 – 3.00mm

NOTE: Sold in single unit packages

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Fength (mm) | L Overall Length OAL (mm) | TiAlN Coated (RC) EDP No. |
|-------------------------|--|----------------|----------------------------|-------------------------------|------------------------------------|---------------------------|
| 2.05 | 0.0807 | | 3.0 | 34 | 70.0 | 6230205RC |
| 2.10 | 0.0827 | | | 36 | | 6230210RC |
| 2.15 | 0.0846 | | | 38 | | 6230215RC |
| 2.20 | 0.0866 | | | 40 | | 6230220RC |
| 2.25 | 0.0886 | | | 42 | | 6230225RC |
| 2.30 | 0.0906 | | | 44 | | 6230230RC |
| 2.35 | 0.0925 | | | 90.0 | 46 | 6230235RC |
| 2.40 | 0.0945 | | | | 48 | 6230240RC |
| 2.45 | 0.0965 | | | | 50 | 6230245RC |
| 2.50 | 0.0984 | | | | | 6230250RC |
| 2.55 | 0.1004 | | | | | 6230255RC |
| 2.60 | 0.1024 | | | | | 6230260RC |
| 2.65 | 0.1043 | | | | | 6230265RC |
| 2.70 | 0.1063 | | | | | 6230270RC |
| 2.75 | 0.1083 | 36 | | | | 6230275RC |
| 2.80 | 0.1102 | | | 6230280RC | | |
| 2.85 | 0.1122 | | | 6230285RC | | |
| 2.90 | 0.1142 | | | 6230290RC | | |
| 2.95 | 0.1161 | 32 | | 6230295RC | | |
| 3.00 | 0.1181 | | | 6230300RC | | |

Features:

- For holes with depth 15x diameter
- Solid Tungsten Carbide Sub-micro grain with 2 helicoidal holes
- Right-cut, point geometry for self-centering
- Standard sizes in increments of 0.05mm
- Other diameters and lengths on request
- Available uncoated or TiAlN coated

Benefits:

- Higher drilling speed and longer tool life
- Suitable for specific materials
- High precision with h5 tolerances
- Strong, no deviation, maximum alignment accuracy
- Optimum cooling, lubrication and chip removal

All 6230 Series Drills sold in single unit packages

62FLX Series Solid Carbide

30-40xD – Depth of Cut 135°



h5 Tolerance Reinforced Shank d 3.0mm



+ 0.000/- 0.005mm (h5) Uncoated Version
+ 0.002/-0.0003mm Coated Version

High performance drill with reinforced shank at 3.00mm.

For use on small, deep holes and medium and tensile strength steels, stainless, titanium, alloys and cast iron.

High performance with outstanding surface finishes with strong core - no deviation.

All items can be quoted as left hand cut - contact us. Ideal for Medical applications.

Custom specifications such as:

- Size range from 0.30mm to 1.00mm in increments of 0.05mm
- Intermediate sizes upon request
- For Drilling 30-40xD with Pecking Cycle Process
- H24° / 135°
- Shank Diameter 3.00 or 1/8" x OAL 50mm
- Special sizes and tolerances available
- Minimum custom order is 10 Pieces
- Other diameters and lengths on request
- Available in uncoated or TiAlN coated
- **Lead-time on custom orders—4 Weeks ARO**

NEW for 2022

62FLX Series Solid Carbide - Drill Sizes 0.30 – 1.00mm

NOTE: Sold in single unit packages

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | d Shank Dia. (mm) | I1 Flute Length (mm) | I2 D Length (mm) | L Overall Length OAL (mm) | TiAlN Coated (RC) EDP No. |
|-------------------------|--|----------------------------|-------------------------------|------------------------|------------------------------------|------------------------------|
| 0.30 | 0.0118 | 3.0 | 3 | 12.0 | 50.0 | 62FLX030RC |
| 0.35 | 0.0138 | | 3.5 | 14.0 | | 62FLX035RC |
| 0.40 | 0.0157 | | 4 | 16.0 | | 62FLX040RC |
| 0.45 | 0.0177 | | 4.5 | 18.0 | | 62FLX045RC |
| 0.50 | 0.0197 | | 5 | 20.0 | | 62FLX050RC |
| 0.55 | 0.0217 | | 5.5 | 22.0 | | 62FLX055RC |
| 0.60 | 0.0236 | | 6 | 24.0 | 62FLX060RC | |
| 0.65 | 0.0256 | | 6.5 | 26.0 | 62FLX065RC | |
| 0.70 | 0.0276 | | 7 | 28.0 | 77.0 | 62FLX070RC |
| 0.75 | 0.0295 | | 7.5 | 30.0 | | 62FLX075RC |
| 0.80 | 0.0315 | | 8 | 32.0 | | 62FLX080RC |
| 0.85 | 0.0335 | | 8.5 | 34.0 | | 62FLX085RC |
| 0.90 | 0.0354 | | 9 | 36.0 | | 62FLX090RC |
| 0.95 | 0.0374 | | 9.5 | 38.0 | | 62FLX095RC |
| 1.00 | 0.0394 | 10 | 40.0 | 62FLX100RC | | |

Currently Non-Stock. Inventory Coming Soon.

3100 Series Short Solid Carbide 3 Flute Short Cross Drills | 140°

h5 Tolerance Reinforced Shank d 3.0mm



10% COBALT
MICRO
GRAIN
CARBIDE

RH

140°
Point

30°
Helix

3
FLUTES

HARDNESS
1570=
HV30


h5

+ 0.000/- 0.005mm (h5)

High performance drill, 3-flutes for drilling and reaming in one operation.
For soft, medium and tensile strength steels, stainless, titanium, alloys and cast iron.
Good for transversal drilling with no burrs inside cut and strong web with no deviation.
Special, custom specification items available.

Custom specifications such as:

- Only available in right hand cut
- Size range from 0.5mm to 3.00mm in increments of 0.05 or 0.10mm
- Intermediate sizes upon request
- Special sizes and tolerances available
- Minimum Special Order is 10 Pieces
- **Lead-time on customs 4 weeks ARO**
6 weeks with coating

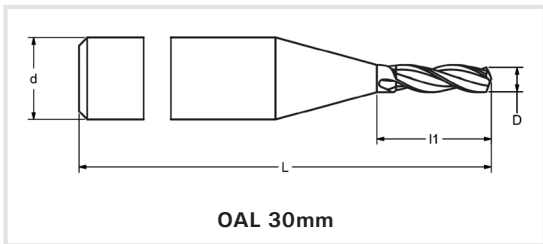

3100 Series Short Solid Carbide 3 Flute Short Cross Drills - Drill Sizes
 0.50 – 1.50mm
NOTE: Sold in single unit packages

| D Flute Dia. (mm) | D Dec. Equiv. Flute Dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | TiAlN Coated (RC) EDP No. |
|-------------------------|--|----------------|-------------------------|-------------------------------|---------------------------------|------------------------------|
| 0.50 | 0.0197 | | 3.0 | 3.0 | 30.0 | 3100050RC |
| 0.55 | 0.0217 | | | | | 3100055RC |
| 0.60 | 0.0236 | | | | | 3100060RC |
| 0.65 | 0.0256 | | | | | 3100065RC |
| 0.70 | 0.0276 | | | | | 3100070RC |
| 0.75 | 0.0295 | | | 3100075RC | | |
| 0.80 | 0.0315 | | | 3100080RC | | |
| 0.85 | 0.0335 | | | 3100085RC | | |
| 0.90 | 0.0354 | | | 3100090RC | | |
| 0.95 | 0.0374 | | | 3100095RC | | |
| 1.00 | 0.0394 | | | 3100100RC | | |
| 1.05 | 0.0413 | | | 3100105RC | | |
| 1.10 | 0.0433 | | | 3100110RC | | |
| 1.15 | 0.0453 | | | 3100115RC | | |
| 1.20 | 0.0472 | | | 3100120RC | | |
| 1.25 | 0.0492 | | 3100125RC | | | |
| 1.30 | 0.0512 | | 3100130RC | | | |
| 1.35 | 0.0531 | | 3100135RC | | | |
| 1.40 | 0.0551 | 54 | 5.0 | 3100140RC | | |
| 1.45 | 0.0571 | | 3100145RC | | | |
| 1.50 | 0.0591 | | 3100150RC | | | |


Feed & Speed indications for Titanium, Stainless, and Aluminum

*Feeds & Speeds are indications only and may vary depending on the process

| | | Cutting Speed Vc (m/min) / (SFM) | Feed per Revolution (mm) / (inch) | | | |
|-----------|----------|-------------------------------------|-----------------------------------|------------------------------|------------------------------|------------------------------|
| | | | Diam 0,50-1,00 | Diam 1,00-1,50 | Diam 1,50-2,00 | Diam 2,00-3,00 |
| Titanium | Uncoated | 20-30 / 65-98 | 0,01-0,02 / 0.0004-0.0008 | 0,02-0,04 / 0.0008-0.0016 | 0,04-0,08 / 0.0016-0.0031 | 0,08-0,12 / 0.0031-0.0047 |
| | Coated | 30-40 / 98-131 | | | | |
| Stainless | Uncoated | 30-40 / 98-131 | 0,02-0,04 / 0.0008-0.0016 | 0,04-0,06 / 0.0016-0.0024 | 0,06-0,10 / 0.0024-0.0039 | 0,10-0,15 / 0.0039-0.0059 |
| | Coated | 40-60 / 131-197 | | | | |
| Aluminum | Uncoated | 100-150 / 328-492 | 0,03-0,05 / 0.0011-0.002 | 0,05-0,10 / 0.002-0.0039 | 0,10-0,20 / 0.0039-0.0079 | 0,20-0,30 / 0.0079-0.0118 |
| | Coated | 150-200 / 492-656 | | | | |

3200 Series Long Solid Carbide 3 Flute Long Reamer Drills | 140°

h5 Tolerance Reinforced Shank d 3.0mm




+ 0.000/- 0.005mm (h5)

High performance drill, 3-flutes for drilling and reaming in one operation.
For soft, medium and tensile strength steels, stainless, titanium, alloys and cast iron.
Good for transversal drilling with no burrs inside cut and strong web with no deviation.
Special, custom specification items available.


Custom specifications such as:

- Only available in right hand cut
- Size range from 0.5mm to 3.00mm in increments of 0.05 or 0.10mm
- Intermediate sizes upon request
- Special sizes and tolerances available
- Minimum special order is 10 Pieces
- **Lead-time on customs 4 weeks ARO**
6 weeks with coating

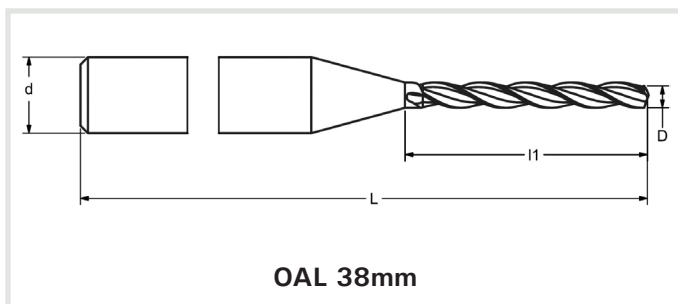


3200 Series Long Solid Carbide 3 Flute Long Reamer Drills - Drill Sizes 0.50 – 3.00mm
NOTE: Sold in single unit packages

| D Flute Dia. (mm) | D dec. equiv. flute dia. (inch) | Wire # Frac | d Shank Dia. (mm) | l1 Flute Length (mm) | L Overall Length OAL (mm) | TiAlN Coated (RC) EDP No. |
|-------------------|---------------------------------|-------------|-------------------|----------------------|---------------------------|---------------------------|
| 0.50 | 0.0197 | | 3.0 | 6.0 | 38 | 3200050RC |
| 0.55 | 0.0217 | | | | | 3200055RC |
| 0.60 | 0.0236 | | | | | 3200060RC |
| 0.65 | 0.0256 | | | 3200065RC | | |
| 0.70 | 0.0276 | | | 3200070RC | | |
| 0.75 | 0.0295 | | | 3200075RC | | |
| 0.80 | 0.0315 | | | 3200080RC | | |
| 0.85 | 0.0335 | | | 3200085RC | | |
| 0.90 | 0.0354 | | | 3200090RC | | |
| 0.95 | 0.0374 | | | 3200095RC | | |
| 1.00 | 0.0394 | | | 3200100RC | | |
| 1.05 | 0.0413 | | | 3200105RC | | |
| 1.10 | 0.0433 | | | 3200110RC | | |
| 1.15 | 0.0453 | | | 3200115RC | | |
| 1.20 | 0.0472 | | | 3200120RC | | |
| 1.25 | 0.0492 | | | 3200125RC | | |
| 1.30 | 0.0512 | | | 3200130RC | | |
| 1.35 | 0.0531 | | | 3200135RC | | |
| 1.40 | 0.0551 | 54 | | 3200140RC | | |
| 1.45 | 0.0571 | | | 3200145RC | | |
| 1.50 | 0.0591 | | | 3200150RC | | |
| 1.60 | 0.0630 | | | 3200160RC | | |
| 1.70 | 0.0669 | 51 | | 3200170RC | | |
| 1.80 | 0.0709 | | | 3200180RC | | |
| 1.90 | 0.0748 | | | 3200190RC | | |
| 2.00 | 0.0787 | | | 3200200RC | | |
| 2.10 | 0.0827 | | | 3200210RC | | |
| 2.20 | 0.0866 | | | 3200220RC | | |
| 2.30 | 0.0906 | | | 3200230RC | | |
| 2.40 | 0.0945 | | | 3200240RC | | |
| 2.50 | 0.0984 | | | 3200250RC | | |
| 2.60 | 0.1024 | | | 3200260RC | | |
| 2.70 | 0.1063 | 36 | | 3200270RC | | |
| 2.80 | 0.1102 | | 3200280RC | | | |
| 2.90 | 0.1142 | | 3200290RC | | | |
| 3.00 | 0.1181 | | 3200300RC | | | |



3 SHORT LIPS

Heat of cutting is absorbed by 3 short lips so perfect for hightense materials. 3 lips make thinner chips. Good for less burrs outside hole.





3 MARGINS


Drill is guided by 3 margins which make the drilling through hole straight. Circularity of hole is perfect with no ovalization.

62H1 Gun Drill - Single Flute Helicoidal Drills

10 x D – Depth of Cut 120°

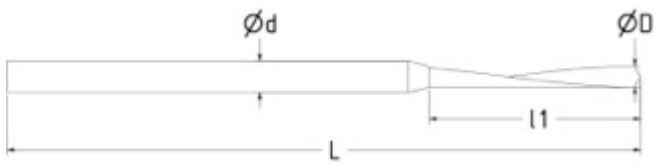

For polycarbonates, soft materials, brass & copper



For soft materials, brass, copper, stainless.

Direct drilling, no centering required.

Single lip works close to hole center so chip cutting is easier.

Good for reaming operation. Can be used as a reamer.

Custom specifications such as:

- Range from D0.50 to D1.50 - increments of 0.05 mm
- Intermediate sizes upon request
- Special sizes, point angles and tolerances available
- Minimum custom order is 10 Pieces



NEW for 2022

62H1 Gun Drill Z1 Helicoidal -
Drill Sizes 0.50– 1.50mm

NOTE: Sold in 5 piece packages only

| D (mm) | D(inch) | Flute Length (mm) | Shank Diameter (mm) | AOL L (mm) | EDP No. |
|--------|---------|-------------------|---------------------|------------|----------|
| 0.50 | 0.0197 | 5.00 | 1.50 | 30 | 62H1050R |
| 0.55 | 0.0217 | 5.50 | 1.50 | 30 | 62H1055R |
| 0.60 | 0.0236 | 6.00 | 1.50 | 30 | 62H1060R |
| 0.65 | 0.0256 | 6.50 | 1.50 | 30 | 62H1065R |
| 0.70 | 0.0276 | 7.00 | 1.50 | 30 | 62H1070R |
| 0.75 | 0.0295 | 7.50 | 1.50 | 30 | 62H1075R |
| 0.80 | 0.0315 | 8.00 | 1.50 | 30 | 62H1080R |
| 0.85 | 0.0335 | 8.50 | 1.50 | 30 | 62H1085R |
| 0.90 | 0.0354 | 9.00 | 1.50 | 30 | 62H1090R |
| 0.95 | 0.0374 | 9.50 | 1.50 | 30 | 62H1095R |
| 1.00 | 0.0394 | 10.00 | 1.50 | 30 | 62H1100R |
| 1.05 | 0.0413 | 10.50 | 1.50 | 30 | 62H1105R |
| 1.10 | 0.0433 | 11.00 | 1.50 | 30 | 62H1110R |
| 1.15 | 0.0453 | 11.50 | 1.50 | 30 | 62H1115R |
| 1.20 | 0.0472 | 12.00 | 1.50 | 30 | 62H1120R |
| 1.25 | 0.0492 | 12.50 | 1.50 | 30 | 62H1125R |
| 1.30 | 0.0512 | 13.00 | 1.50 | 30 | 62H1130R |
| 1.35 | 0.0531 | 13.50 | 1.50 | 30 | 62H1135R |
| 1.40 | 0.0551 | 14.00 | 1.50 | 30 | 62H1140R |
| 1.45 | 0.0571 | 14.50 | 1.50 | 30 | 62H1145R |
| 1.50 | 0.0591 | 15.00 | 1.50 | 30 | 62H1150R |

Currently Non-Stock Item. Inventory Coming Soon.

Speeds and Feeds Chart

Cutting Speed - RPM = $3.82 \times \text{SFM} / \text{Drill Dia.}$

Feed Rate - IPM = RPM X IPR

Guidelines - Not Guaranteed

| Material | Diameter (mm) | Speed (sfm) | Feed Rate (lpr) |
|-------------------------------------|---------------|-------------|-----------------|
| Mild and Low Carbon Steels | 0.10 – 0.50 | 40 – 80 | 0.0002 – 0.0003 |
| | 0.51 – 0.70 | 80 – 140 | 0.0003 – 0.0004 |
| | 0.71 – 0.99 | 140 – 200 | 0.0004 – 0.0006 |
| | 1.00 – 2.00 | 140 – 200 | 0.0006 – 0.0016 |
| | 2.01 – 3.00 | 140 – 200 | 0.0016 – 0.0020 |
| High Carbon, Alloy Steels | 0.10 – 0.50 | 30 – 70 | 0.0002 – 0.0003 |
| | 0.51 – 0.70 | 70 – 100 | 0.0002 – 0.0004 |
| | 0.71 – 0.99 | 70 – 100 | 0.0004 – 0.0006 |
| | 1.00 – 2.00 | 100 – 170 | 0.0006 – 0.0016 |
| | 2.01 – 3.00 | 100 – 170 | 0.0014 – 0.0020 |
| Stainless Steels – 300 Series, 17-4 | 0.10 – 0.50 | 20 – 40 | 0.0001 – 0.0002 |
| | 0.51 – 0.70 | 40 – 70 | 0.0002 – 0.0003 |
| | 0.71 – 0.99 | 70 – 120 | 0.0002 – 0.0003 |
| | 1.00 – 2.00 | 70 – 120 | 0.0003 – 0.0010 |
| | 2.01 – 3.00 | 70 – 120 | 0.0008 – 0.0014 |
| Stainless Steels – 400 Series | 0.10 – 0.50 | 30 – 60 | 0.0001 – 0.0002 |
| | 0.51 – 0.70 | 60 – 90 | 0.0002 – 0.0003 |
| | 0.71 – 0.99 | 90 – 140 | 0.0003 – 0.0004 |
| | 1.00 – 2.00 | 90 – 140 | 0.0004 – 0.0012 |
| | 2.01 – 3.00 | 90 – 140 | 0.0010 – 0.0018 |
| Cast Iron | 0.10 – 0.50 | 70 – 160 | 0.0002 – 0.0003 |
| | 0.51 – 0.70 | 160 – 200 | 0.0003 – 0.0004 |
| | 0.71 – 0.99 | 200 – 340 | 0.0004 – 0.0008 |
| | 1.00 – 2.00 | 200 – 340 | 0.0008 – 0.0020 |
| | 2.01 – 3.00 | 200 – 340 | 0.0016 – 0.0026 |
| Ductile Iron | 0.10 – 0.50 | 60 – 100 | 0.0001 – 0.0002 |
| | 0.51 – 0.70 | 100 – 140 | 0.0002 – 0.0003 |
| | 0.71 – 0.99 | 140 – 270 | 0.0003 – 0.0006 |
| | 1.00 – 2.00 | 140 – 270 | 0.0006 – 0.0016 |
| | 2.01 – 3.00 | 140 – 270 | 0.0014 – 0.0024 |
| Aluminum | 0.10 – 0.50 | 80 – 170 | 0.0002 – 0.0003 |
| | 0.51 – 0.70 | 170 – 270 | 0.0003 – 0.0005 |
| | 0.71 – 0.99 | 270 – 400 | 0.0005 – 0.0008 |
| | 1.00 – 2.00 | 270 – 400 | 0.0008 – 0.0024 |
| | 2.01 – 3.00 | 270 – 400 | 0.0020 – 0.0031 |
| High Alloys – Inconel, Titanium | 0.10 – 0.50 | 30 – 70 | 0.0001 – 0.0002 |
| | 0.51 – 0.70 | 70 – 100 | 0.0002 – 0.0003 |
| | 0.71 – 0.99 | 100 – 170 | 0.0003 – 0.0004 |
| | 1.00 – 2.00 | 100 – 170 | 0.0004 – 0.0012 |
| | 2.01 – 3.00 | 100 – 170 | 0.0010 – 0.0018 |

NOTE: Cutting parameters are good for series 5100 cobalt, 6000 & 3000 carbide drills

PILOT

Precision Products

Best-in-class brands, outstanding customer service and fast, reliable delivery

Pilot Precision Products is the world's largest supplier of industrial broaches and small, round cutting tools from duMONT MinuteMan® Industrial Broaches, Hassay Savage, duMONT CNC Indexable Broaching System, Magafor® and GMauvaisUSA™.

Pilot Precision Products balances time-honored traditions with innovative manufacturing techniques in all its offerings. As a result, customers can trust that exceptional service from each company will remain the same.



World's largest supplier of keyway broaches

The duMONT Company has been designing and manufacturing precision broaches since 1945. Minute Man® Broaches are recognized all over the world for quality, durability and engineering detail. All are manufactured of the finest quality high-speed steel.

duMONT CNC Indexable Broaching System

The duMONT CNC Indexable Broaching System offers a wide range of products that provide the opportunity to manufacture parts more efficiently and accurately through single machine processing. This includes CNC Lathes, Milling Machines, Motorized Slotter and many CNC Broaching Systems. To complement all tools, we offer many accessories to make your project run effortlessly.



World's leader and largest supplier in center drills, spot drills, micro to standard size reamers, countersinks, multi-function tools and micro end mills

Magafor can resolve any centering, chamfering, micro-milling or reaming issues you may be experiencing with top-quality products available in HSS-Cobalt or Carbide. Their Multi-V can reduce machining times and tool set-ups; one tool, one holder, ten applications. Pilot is the exclusive American distributor of Magafor products.



World's leader in rotary and index broaching

Hassay Savage products have five decades of engineering expertise behind them. If you're looking for critically accurate cuts, look no further. Choose from push, pull and rotary broaches with TiN and TiAlN coating. Big jobs come in small parts. Let us be your partner in unique cutting applications.



Highly specialized precision micro drills

GMauvaisUSA™ is known for worldwide for superior precision, quality, consistency and performance. Notably, micro drills from the brand afford extraordinary concentricity, circularity and straightness within .00008". As the exclusive American distributor of GMauvais products, Pilot can bring GMauvaisUSA™ precision to you and your projects.

In addition to our robust off-the-shelf product offerings, customers often call on us for custom tooling. When such a request comes in, we never shy away from that challenge. In fact, we enjoy working to create a unique and highly productive solution.

Tooling Certificates - For Participating OEM Partners, and Customers.

Tooling Certificates are available with any new machine purchased. By purchasing a certificate up front as part of your investment, you will be able to free up your tooling budget and equip your new machines.



ABC Company - Tooling Certificate

Quote created on August 6, 2021 - Reference: 20210806-161402245
For John Doe [Show details](#)

Products & Services

| | |
|---|-------------------|
| Tooling Certificate Credit Redeem this tooling certificate on your next order | 1 x \$2500.00 |
| <hr/> | |
| One-time subtotal | \$2500.00 |
| Total | \$25000.00 |

This quote expires on September 12, 2021.

Questions? Contact me



Marco Morgado
mmorgado@pilotprecision.com

Download quote

Print quote



Pilot Precision Products
15 Merrigan Way
South Deerfield, MA 01373
USA



Purchasing a Pilot Precision Products Tooling Certificate

- Purchase the certificate when you purchase your machine through your local dealer or direct from Pilot Precision Products.
- There is no limit on the amount of the certificate. Additionally, the amount of the certificate can be split into (2) releases. You will then be able to redeem tooling at the Pilot Precision Products list price.
- The Pilot Precision Products Tooling Certificate can be used to purchase standard tools from our catalog and special order tools designed to your part.
- Technical sales will work with you to provide the best tooling for your machine and applications.
- Expires after 12 months of issuance.
- Valid for all Pilot Precision brands including **Palbit**.

** Restrictions: There are no returns or refunds with the certificate.*



Pilot Precision Products is the world's largest manufacturer and supplier of industrial broaches from duMONT MinuteMan® Industrial Broaches and Hassay Savage broaching tools, after a recent merger of these two top brands. Pilot Precision Products is also the leading supplier of small, round cutting tools and is the exclusive American master wholesaler of Magafor® and GMauvaisUSA™ products.

Located in Western Massachusetts, an area long known as a manufacturing hub for complex machining, Pilot Precision Products balances time-honored traditions with innovative manufacturing techniques in all its offerings, and only partners with like-minded brands. As a result, customers trust the best-in-class, durable and reliable products that the manufacturer couples with outstanding customer service and fast, reliable delivery.

Distributed by:

15 Merrigan Way | South Deerfield, MA 01373
413-350-5200 | PilotPrecision.com
ISO 9001:2015

PILOT 
Precision Products